



Laboratory Glassware, Instruments & Accessories

PRICELIST
2024-25

GLASSCO LABORATORY EQUIPMENTS PVT. LTD.

 www.glasscolabs.com

 info@glasscolabs.com



From the MD's Desk

Mr. Sameer Jain (Managing Director)

Glassco is a producer of high-quality **Lab Glassware and Instruments** for more than **50 years** and **exporting to 80 countries**. We export a wide range of standard glassware, according to **DIN, JIS, ISO**, and **FROM THE MD'S DESK** standards from one production facility with **more than 1000 employees**.

Recently, we started manufacturing **Disposable Glassware** like Test Tubes, Pasteur Pipettes, Culture Tubes, and Chromatography Vials, a milestone achieved in Glassco Laboratories, having a capacity of producing **one million pieces per day**.

For our scientific instruments, we have marketed under **DAN Logitech Brand** that ensures **good design** and **functionality** for our **benchtop instrument range**.

We are proud to assert that **Glassco** is the first company to enable **QR Code** on the lab glass, which helps the users access all relevant information about the product within a fraction of seconds by simply scanning the code through their smartphones. Offering a **QR Code** on our volumetric flasks adds up to our innovation portfolio. This enables our customers to **download individual certificates** for our products.

QR code is also available in this catalogue, which, when scanned, leads you to the website for any additional information on the products or quick buys.

Glassco has signed an agreement with **Caliber Software Company** having more than 250 installations in Pharma Companies. Their software is compatible with our **QR coded Volumetric Glassware**. Offering a QR Code on our Volumetric Flasks amplifies our portfolio and enables the customers to download individual certificates for our products. QR Code for each product is also available in this catalogue, which, when scanned, redirects you to the website for additional information about the products and quick buy.

A good alliance with our customers helps us understand their product-related needs and provide the best solution in the shortest period. If you have any specific market requirements for the product, we would be grateful to recast and manufacture them for you. You can also visit our website, www.glasscolabs.com, or contact us at info@glasscolabs.com.

We are delighted to introduce the **2023-24** edition of the Glassco catalogue.



Glassco History

Glassco was established in 1969 as a volumetric glassware production company. Till 1996, Glassco was catering mainly to the domestic market. Since 1996, Glassco started exporting from its domestic plant and rapid success in the international export market. It was time to set up a separate Export-Oriented Unit (EOU), which was established in the year 2000, employing nearly 70 people at that time in an area of 2000 square meters. In 2006, Glassco moved into a new location as required since the export business's growth was very rapid. We are now working with more than 900+ people in the glassware plant and covering nearly 72000 square meter area.



SEMI AUTOMATIC PRODUCTION PLANT

GLASSCO PRODUCT PORTFOLIO

Glassco is the most prominent Indian exporter of scientific labware, shipping more than 600 containers of glassware annually. These are manufactured under ISO / ASTM / DIN / USP & NABL Standards. Along with glassware, we provide an allied line of products and accessories used in laboratory applications such as Plasticware, Rubberware, Metalware, Liquid Handling Instruments and Lab Instruments.



Interchangeable



Volumetric



Filtration



General

ALLIED PRODUCTS & ACCESSORIES



Plasticware



Metalware



Rubberware



Misc.



Instruments



Micropipette



DISPOSABLE GLASSWARE PLANT

Glassco employs more than 85 glassblowers working on Automatic & Semi Automatic machines, making a variety of products. We have a complete line of production for Beakers, Flasks, Joints and Flanges. More than 28 glassblowers are involved in making high precision glass like, Condensers, Adapters and Assemblies of various kind. Recently Glassco has started a disposable glassware plant with capacity of making 1 million pcs/day, which includes **Test tube, Vials, & Pasteur Pipettes.**

AUTOMATIC PRODUCTION

Glassco updates machines to the latest technology available and also does in-house innovations. Since 2006, there has been a continuous addition of new automatic machines, making the product's quality even better and increased production capacity.

AUTOMATIC CYLINDER
FORMING MACHINE:
800 PCS PER SHIFT



AUTOMATIC JOINT
FORMING MACHINE:
2000 PCS PER SHIFT



TEST TUBE MACHINE:
40000 PCS PER SHIFT



BEAKER MACHINE:
6000 PCS PER SHIFT



AUTOMATIC FLASK
FORMING MACHINE:
800 PCS PER SHIFT



Awards

Awarded under
“MAKE IN INDIA”
 programme (2011)



Awarded best Exporters
 of India by “CAPEXIL”
 (Govt of India)



**FINALIST IN THE
 INNOVATION GALLERY 2018**



2005



2007



2012



2013



2020



2023

Production & Process

Fabrication

RAW MATERIAL

- Tubing of ASTM E- 438 TYPE I, CLASS A BORO 3.3 GLASS.
- We import 450 MT of glass tubes annually.
- We have a minimum stock of 4 months at any point in time, which is more than 80 tonnes of glass tubing.



Raw Material



Raw Material Tubing

COMPUTERISED GLASS FORMING MACHINE

- Computer-controlled joint making machines gives added leverage for precise sockets, cones, rims, and flanges.
- Automatic joint making machines ensures consistent quality of joints. All the products are placed under conveyor ovens for annealing / de-stressing that runs round the clock.



CNC MACHINE : For special custom made products.




ANNEALING LEHRS

Production & Process

Infrastructure

PRINTING MACHINE

- Helps print in bulk without compromising on the quality

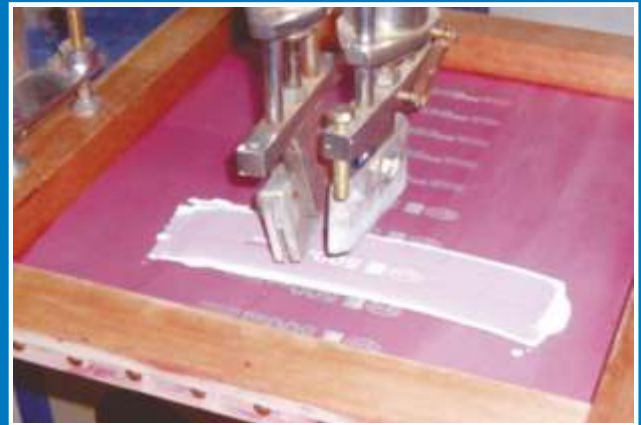

ULTRASONIC WASHING MACHINE

- Glassco uses state-of-the-art ultrasonic washing machine after the grinding process which is developed and designed in-house to wash up to 5,000 pieces in 8 hours.
- For running the complete manufacturing facility, a custom-made software is used.



Grinding Machine



Hand Polishing being done



Washing Machine

WAREHOUSE

- Our 8000m² warehouse facility enables us to deliver quality products in the shortest amount of lead time.
- We have an approximate 10000 pallet position in our warehouse.



FINISHED GOODS AREA

Production & Process

Calibration Lab

CALIBRATION LABORATORY

- We house the German calibration machines enabling 0.003% accuracy and an A-class tolerance.
- Our automatic quality control verifies Burettes, Pipettes & Flasks.
- Each & Every glassware has its calibration certificate.



QUALITY CONTROL
CENTRE MACHINE



LARGE VOLUME CALIBRATION
LAB MACHINE



SMALL VOLUMETRIC
CALIBRATION LAB MACHINE



PIPETTE
CALIBRATION MACHINE

Glassco has undertaken accreditation for its system for calibration and testing as per ISO 17025:2005.

Our calibration lab is NABL approved. NABL has an MRA under the Asia Pacific Laboratory Accreditation Cooperation (APLAC), and the International Laboratory Accreditation Cooperation (ILAC), which means the calibrated glassware is acceptable in laboratories worldwide.

Results of calibration are guaranteed for precision as per DIN, ISO, USP & ASTM standards.

The calibrations performed by Glassco are done under ISO 17025:2005.

Please visit our website www.glasscolabs.com to see our accreditation



Certificates

QUALITY POLICY

Glassco strives to produce and supply laboratory products at affordable prices that meet or exceed customer's expectations, with timely deliveries.

We achieve this by obtaining customer feedbacks of our performance and making relevant changes in our management system for continual improvement.

QUALITY MANAGEMENT SYSTEM

Glassco strives to produce and supply laboratory products at affordable prices that meet or exceed customer's expectations with timely deliveries.

We achieve this by obtaining customer feedback on our performance and making relevant changes in our management system for continual improvement.

Glassco believes in delivering world-class quality to all its clients globally and is recognized in the International market for a quality brand.

The Quality Management system at Glassco is ISO 9001:2015 certified by Intertek accredited to UKAS. Glassco maintains a Quality System manual for all its business processes and at all manufacturing and post-manufacturing levels. The quality system strictly adheres to people supervising work affecting quality at Glassco, are trained internal auditors, and carry out internal audits in routine practice.



CERTIFICATE OF REGISTRATION

This is to certify that the management system of:

Glassco Laboratory Equipments Pvt. Ltd.

Main Site: Manglaj, P.O. Khudda Kalan, Ambala Cantt - 133004, Haryana, India

has been registered by Intertek as conforming to the requirements of:

ISO 45001:2018

Certified to OHSAS 18001:2007 from 23 October 2015 to 13 October 2021.

The management system is applicable to:

Manufacture of Glassware for use in General & Pharmaceutical Laboratories.

Certificate Number: 8101
Initial Certification Date: 23 October 2015
Date of Certification Decision: 13 October 2021
Issuing Date: 25 November 2021
Valid Until: 22 October 2024



Calin Moldovean
President, Business Assurance

Intertek Certification Limited, 10A Victory Park, Victory Road, Derby DE24 8ZF, United Kingdom

Intertek Certification Limited is a UKAS accredited body under schedule of accreditation no. 014.



In the issuance of this certificate, Intertek assumes no liability to any party other than to the Client, and then only in accordance with the agreed upon Certification Agreement. This certificate's validity is subject to the organisation maintaining their system in accordance with Intertek's requirements for systems certification. Validity may be confirmed via email at certificate.validation@intertek.com or by scanning the code to the right with a smartphone. The certificate remains the property of Intertek, to whom it must be returned upon request.



CERTIFICATE OF REGISTRATION

This is to certify that the management system of:

Glassco Laboratory Equipments Pvt. Ltd.

Main Site: Manglaj, P.O. Khudda Kalan, Ambala Cantt - 133004, Haryana, India

has been registered by Intertek as conforming to the requirements of:

ISO 9001:2015

The management system is applicable to:

Manufacture of Glassware Laboratory Equipment for use in Diagnostic, Pharmaceutical and General Laboratories.

Certificate Number: IPK-0039.06
Initial Certification Date: 30 June 2017
Last Certificate Expiry Date: 24 April 2023
Date of Last Recertification Audit: 18 April 2023
Certification Cycle Start Date: 28 April 2023
Issuing Date: 06 May 2023
Valid Until: 24 April 2026



Calin Moldovean
President Business Assurance

Intertek Certification Limited, 10A Victory Park, Victory Road, Derby DE24 8ZF, United Kingdom



Intertek Certification Limited is a UKAS accredited body under schedule of accreditation no. 014.
In the issuance of this certificate, Intertek assumes no liability to any party other than to the Client, and then only in accordance with the agreed upon Certification Agreement. This certificate's validity is subject to the organisation maintaining their system in accordance with Intertek's requirements for systems certification. Validity may be confirmed via email at certificate.validation@intertek.com or by scanning the code to the right with a smartphone. The certificate remains the property of Intertek, to whom it must be returned upon request.
CT-ISO 9001:2015-UKAS-EN-17-P-2-Jul-21

Tests & Checks

7Steps to Quality

For GLASSCO, Quality is the foundation in all the production

1. Quality plan for communication with customers
2. Quality in translating customers requirements (to our objectives) Products
3. Quality of raw material, including accuracy of semi finished and in process material
4. Quality in plant setup, including, trained manpower, machinery updates & technology
5. Quality in calibration of volumetric glassware
6. Quality in customer services
7. Analysis of all processes, both quantifiable and quality.



Tests & Checks

Glassco carries out measurement check with gauges and calipers for all the products produced in house



Glass Stress-Free


Glassco has five conveyer ANNEALING LEHRS where all the products are annealed to remove manufacturing stress from glass to ensure product durability and strength. We have four stress viewers installed at different locations of the processing.



Wall Strength/Thickness

Glassco uses two thickness testers for testing thickness of glass products to ensure thickness acceptable by the norms of ASTM/DIN/ISO standards which ensures products used are safe & durable.

Quality

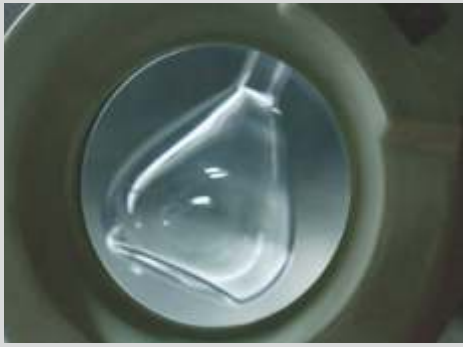

Optical Clarity

Glassco verifies the optical clarity of all the products 100% . This is done twice first when the product is produced and second before the product is packed to ship.



Fit testing for joints

The taper of the cones and sockets are verified by gauges and taper test tools before further processing, to check that the joints are secured of leaks.



Vacuum testing of mating joints

Mating joints are tested under a vacuum to verify that the taper are even and no leaks exist.



Print color adhesion test

Printing on the glass is tested for colour adhesion by subjecting them to acid boiling, scratch and tape peel off test.

Glassco's Mission

Glassco strives to be recognized as one of the most innovative company in the field of Laboratory Glassware & Instruments for its excellent quality & innovative designs that have become industry standard. We want to constantly adapt & develop new technologies to set us apart from our competitors.

Glassco's Vision

To be the first choice of its customers & users. Maintain & provide excellent Quality, Value & Convenience. We aspire to keep exploring our opportunities by introducing new products to our portfolio with a vision to become a '**One Stop Shop**' for our customers.

Volumetric Glassware

All volumetric glassware requires high precision and accuracy and to achieve that controlled conditions for calibrating volumetric glassware go through automatic calibration machines which is the German state of the art technology imported from Germany.

Glassco's Calibration Laboratory has undertaken accreditation for its system for calibration and testing as per **ISO 17025:2005**.

Glassco's Calibration Laboratory is **NABL** approved. **NABL** has a MRA under the Asia Pacific Laboratory Accreditation Cooperation (**APLAC**) and the International Laboratory Accreditation Cooperation (**ILAC**), which means the calibration provided to customers for volumetric ware is acceptable in calibration laboratories worldwide.

The calibrations performed by **Glassco** calibration laboratory are essential done under **ISO 17025:2005**

NABL Certificate

		National Accreditation Board for Testing and Calibration Laboratories	
CERTIFICATE OF ACCREDITATION			
CALIBRATION LABORATORY, GLASSCO LABORATORY EQUIPMENTS PVT.LTD.			
has been assessed and accredited in accordance with the standard			
ISO/IEC 17025:2017			
"General Requirements for the Competence of Testing & Calibration Laboratories"			
for its facilities at			
MANGLAI, P.O. KHUDDA KALAN, AMBALA CANTT, AMBALA, HARYANA, INDIA			
in the field of			
CALIBRATION			
Certificate Number:	CC-2521		
Issue Date:	22/06/2022	Valid Until:	21/06/2024
This certificate remains valid for the Scope of Accreditation as specified in the annexure subject to continued satisfactory compliance to the above standard & the relevant requirements of NABL. (To see the scope of accreditation of this laboratory, you may also visit NABL website www.nabl-india.org)			
Name of Legal Entity : GLASSCO LABORATORY EQUIPMENTS PVT. LTD.			
Signed for and on behalf of NABL			
	 N. Venkateswaran Chief Executive Officer		

Volumetric Glassware

Types Of Calibration & Usage

Burettes and pipettes are calibrated to deliver (TD, EX) which means the delivered quantity of the liquid corresponds to the capacity indicated on the instrument.

- Fill the burette a little higher than zero marked at the top.
- Check for trapped air bubbles, tap the burettes lightly to remove these; drain the solution carefully to level zero.
- Fill more solution if the meniscus gone below the zero.
- Wipe off the drops at the tip of the burette.
- Open the stopcock very slowly and start titration.
- Do not touch the tip the container wall you are use.

When the color begins to change, stop titration and wait for 30 seconds as the waiting time of Class "AS" burettes.

Pipettes

- Fill the liquid little above the volume mark.
- Wipe off the tip and wet area.
- Hold the pipette at the level and place the tip of the pipette to the wall of a vessel with a slight angle between contact point
- Drain the excess volume until meniscus reaches the calibration mark on the pipette. To use the pipette volume, place the tip to the wall of the vessel with a slight angle. Pay attention to clear the pipette completely. When the level of the liquid reaches the tip of the pipette, you have to wait a little as the waiting time (if the pipette is Class "AS") for say 5 seconds. When the waiting time is over, wipe of f the pipette tip by pulling it upwards along the wall of the vessel. If there is still any residual liquid lef t in the tip, leave it as it is.

Flasks and cylinders is calibrated to contain TC, IN which means the contained quantity of the liquid corresponds to the capacity indicated on the instrument.

Volumetric Flasks

These are calibrated "to contain". These are very precisely calibrated. Fill the volumetric flask with distilled water with a funnel to ensure that water is discharged below the meniscus line. Fill more distilled water until it reaches a bit below of the calibration ring mark. Add some more water in small volumes so that the meniscus will be exactly at the same level of the ring mark. To make accurate standard solution put precise weight of the substance in the flask. Shake the flask with stopper on.

Measuring Cylinders

These are calibrated "to contain" and graduated to show different levels. Cylinders are mainly used for the exact measurement of liquids. First fill the liquid carefully, so that meniscus level will reach the desired volume mark. Add the precise weight of the substance and dissolve the substance by shaking the measuring cylinder. In ASTM standards cylinders are now calibrated "to deliver" (TD), also which has been recently introduced in cylinder section. Results of calibration are guaranteed for precision as per DIN, ISO, USP, & ASTM standards.

Volumetric Glassware with certificate DE-M 18

Glassco's Volumetric Glassware now comes with new DE-M sign of the specific Year. Glassco's Glassware is conformity certified which confirms that all Class A Glassware are manufactured according to "EICH OR DNUNG" THE GERMAN FEDERAL WEIGHTS & MEASURES REGULATIONS. This sign of conformity is printed directly on the product according to DIN 12600

Types of Certificate

BATCH CERTIFICATE

Volumetric flasks come with a batch certificate in which mean value, standard deviation is incorporated along with batch number like which signifies the month 01 and 10 is the years **01.10**. This comes in a pack of 2 and comes along with the flask in the box you can also download it from www.glasscolabs.com and by scanning the QR Code from the label of the box or from the volumetric flask.

QR CODES !

Now On All
Glassco Ware Cartons &
QR-Coded Volumetric Flasks



Use your **Smartphone**
with recommended App
(Page XIV) to scan the
QR Code on the
box labels ...



Select 1



User Manual

Select 2



Certificate of Conformity

Select 3



Certificate of Calibration

www.glasscolabs.com			
VOLUMETRIC FLASK CLASS A		ISO 9001:2015	
CATALOGUE NO	130 234 01	BATCH TEST CERTIFICATE Batch tested in ISO 17025:2005 certified laboratory	
NOMINAL VOLUME	5.00 ml		
TOLERANCE	±0.040 ml		
COMPLIANCE	ISO1042:1998		
BATCH NO	04.18		
MEAN VOLUME			
CONTAINED	5.005 ml		
STANDARD DEVIATION	0.007 ml		
TESTING DEVICE NAME	SARTORIUS		
BALANCE	ABAL-04,420g/0.001g		
WEIGHTS	5g		
THERMOMETER	DM-29-50 to300		
	DEG C/0.1DEG C		
OPERATOR	SUKHBIR		
DATE OF ISSUE	06.04.18		



INDIVIDUAL CERTIFICATE

These flasks come with a certificate on which individual serial number, mean value, standard deviation and measured uncertainty is given along with the batch number and serial number like 01.10 (Month and year of manufacturing) **01.10/505** 505 (serial number). This comes in a pack of one and each flask is having a certificate with it in the box you can also download it from www.glasscolabs.com and by scanning the QR Code from the label of the box or from the volumetric flask.

For Ordering QR Coded printed flask please look at volumetric flask section from page no. 134 to 150

GLASSCO		Glassco Laboratory Equipments Pvt. Ltd.	
CALIBRATION CERTIFICATE (Glassco Calibration Laboratory) (ISO 17025:2005 Certified laboratory)			
CERTIFICATE NO: GLASSCO/2018/505		ISSUE DATE: 06/04/2018	
CUSTOMER: GLA STOCK		CAL. REPORT NO: 004-02	
TEST METHOD: DIMENSIONAL METHOD			
TESTED/RECALIBRATED VOLUMETRIC FLASK: 10ml			
CERTIFICATE NO: 17025/2018			
BATCH NO. & SERIAL NO. OF VOLUMETRIC FLASK: 04.18/505			
RECALIBRATED ON: 06/04/2018			
CALIBRATION RESULT:			
The product was found to contain the following volume at 25 °C			
VOLUME CONTAINED	5.005 ml		
TOLERANCE	±0.040 ml		
CONNECTION	5.001 ml		
STANDARD DEVIATION	0.001 ml		
Expanded uncertainty (at 95% C.L.) is ±0.018 ml			
The product has been calibrated with the following device: Device: Sartorius, 10g Using balance function: ABAL-04,420g/0.001g (SARTORIUS) Thermometer: AC0400-010°C to 30°C/0.1°C All the above devices have valid calibrations traceable to NPL India, traceable to international standards.			
The above product has been examined for compliance to ISO17025:2005 Clause 6.2 has been found to satisfy the specified requirements. The above data has been captured at 25 °C at 47% RH.			
The above calibration report is valid at the time of calibration under lab conditions. This report shall not be reproduced, copied or full, without written permission from Glassco Laboratory Equipments.			
CALIBRATED BY: DR. VISHWAKSHAN			
(DATE OF ISSUE: 06/04/2018)			
This is an electronically generated certificate.			
Page 1 of 1			
www.glasscolabs.com			

USP Glassware

All the volumetric glassware or measuring instruments to be used in laboratories which are under surveillance of US authorities such as Food and Drug Administration (FDA), have a mandatory requirement to use products which adhere to standards set by US PHARMACOPEIA. The USP standard has some deviation from DIN, ISO standards. The products that fall under this category are

- Measuring Pipettes • Measuring Cylinder
- Volumetric Pipettes • Volumetric Flasks

All the products mentioned above have tighter tolerances compared to ISO standards.

Volumetric Glassware with certificate DE-M 18

Usp Individual Certificate

GLASSCO has recently launched its **USP** grade (**UNITED STATES PHARMACOPIA**) standard flasks with also comes with a certificate on which individual serial number, mean value, standard deviation and measured uncertainty is given along with the batch number and serial number like 01.10 (Month and year of manufacturing) 605 (serial number). This comes in a pack of one and comes along with the flask in the box you can also download it from www.glasscolabs.com and by scanning the QR Code from the label of the box.

NABL Calibration Certificate

This certificate is issued by NABL calibration Laboratory at Glassco NABL by virtue of its collaboration with (APLAC) Asia Pacific Laboratory Accrediting Cooperation & (ILAC) International Laboratory Accreditation. NABL Calibration Certificate is internationally recognized.

Both the instrument & Certificate shows the individual serial number & the Certificate no.

NABL
CC-2521

505

01.10

GLASSCO
Glassco Laboratory Equipments Pvt. Ltd.

QR 14763 ISSUE 01 REV 2 OF 02 FEB 2013

CALIBRATION CERTIFICATE

(Glassco Calibration Laboratory)
(ISO 17025:2005 Certified Laboratory)
(USP STANDARD)

CERTIFICATE NO: GLASSCO1804-67101 CRF DATE: 05/04/2018
CUSTOMER: LCP-19 CAL REPORT NO: 1804-08

TEST METHOD: GRAVIMETRIC METHOD
ITEM CALIBRATED: AMBER VOLUMETRIC FLASK - 100 ml

DATALOGUE NO: 18-003-06A
BATCH NO & SERIAL NO. OF VOLUMETRIC FLASK: 03.18/191

ITEM CALIBRATED ON: 11/04/2018
CALIBRATION RESULT:

The product was found to contain the following volume at 20 °C	
VOLUME CONTAINED	100.519 ml
TOLERANCE	±0.080 ml
CORRECTION	-0.019 ml
STANDARD DEVIATION	0.001 ml

Expanded uncertainty (at 95% C.L.k=2) is ±0.018 ml

The product has been calibrated with the following devices:
Standard weights: 100 g
Using Balance Number: ABAL-16.420g/0.001 g (METTLER)
Thermometer NO: DM-20 -50°C to 300°C/0.1°C
All the above devices have valid calibrations traceable to NPL, India; traceable to International standards.

The above product has been examined for compliance to ASTM-E-288 Class-A. It has been found to satisfy the specified requirements. The above item has been calibrated at 24.5°C at RH 38%.

The above calibration result is valid at the time of calibration under lab conditions. This report shall not be reproduced, except in full, unless with written permission from Glassco Laboratory Equipments. The results are valid only for the item submitted for calibration.

CALIBRATED BY:
MR. YOGENDRA PAMMAH

DATE OF ISSUE: 11/04/2018
This is an electronically generated certificate.

Page 1 of 1

www.glasscolabs.com

GLASSCO
Glassco Laboratory Equipments Pvt. Ltd.

QR 15101 ISSUE 01 REV 4 OF 16 SEP 2016

CALIBRATION CERTIFICATE

(Glassco Calibration Laboratory)
(ISO 17025:2005 Certified Laboratory)

CERTIFICATE NO: GLASSCO1804-681751 CRF DATE: 05/04/2018
CUSTOMER: LCP-19 CAL REPORT NO: 1804-08

TEST METHOD: GRAVIMETRIC METHOD
ITEM CALIBRATED: MEASURING CYLINDER HEX BASE: 500 ml

DATALOGUE NO: 18-003-06A
BATCH NO & SERIAL NO. OF MEASURING CYLINDER: 03.18/191

ITEM CALIBRATED ON: 11/04/2018
CALIBRATION RESULT:

The product was found to contain the following volume at 27 °C	
VOLUME CONTAINED	502.000 ml
TOLERANCE	± 2.50 ml
CORRECTION	-2.50 ml

Expanded uncertainty (at 95% C.L.k=2) is ± 0.03 ml

The product has been calibrated with the following devices:
Standard weights: 500 g
Using Balance Number: ABAL-22.1020g/0.001g (METTLER)
Thermometer NO: DT-03 -50°C to 300°C/0.1°C
All the above devices have valid calibrations traceable to NPL, India; traceable to international standards.

The above product has been examined for compliance to ISO 4788:2006 Class-A. It has been found to satisfy the specified requirements. The above item has been calibrated at 25(±0.5)°C at RH (60±2)%. The results are valid only for the item submitted for calibration.

The above calibration result is valid at the time of calibration under lab conditions. This report shall not be reproduced, except in full, unless with written permission from Glassco Laboratory Equipments. The results are valid only for the item submitted for calibration.

DATE OF ISSUE: 12/04/2018

Page 1 of 1

* For ordering all NABL certified glassware, please use middle no. 405

Volumetric Glassware with QR-Code



**Quick Scan
QR Code Reader**



NEOREADER



**QR Code
Reader**

Glassco has launched its QR coded volumetric flasks attaining the **ASTM, ISO** and **ASTM** standards. This is available for both, individual certified volumetric flasks and batch certified volumetric flasks. All the volumetric flasks are made from ASTM E 438 TYPE 1 CLASS A BORO 3.3 GLASS which is chemically inert and thermal shock resistant. All Volumetric wares are calibrated exceeding the demands of applicable standards. As all the manufacturers worldwide normally include the batch / individual certificate in the pack and may have been lost while using the glassware, the only option left for you is to either contact the manufacture or to make a endless efforts to go on the manufacturers website, locate the applicable link and download the certificate . To make it most convenient for you, now with the **GLASSCO QR coded volumetric flasks** all you have to do is scan the QR CODE from your mobile with **QR code scanner (NeoReader)** and it will not only give you certificate of calibration (**individual /batch**) but will also give you information of certificate of compliance and the products user manual.

Volumetric Glassware with Qr-code




Use your
Smartphone
to scan the QR Code
on the box labels ...

FROM HERE
YOU GET

Certificate of conformity

User manual

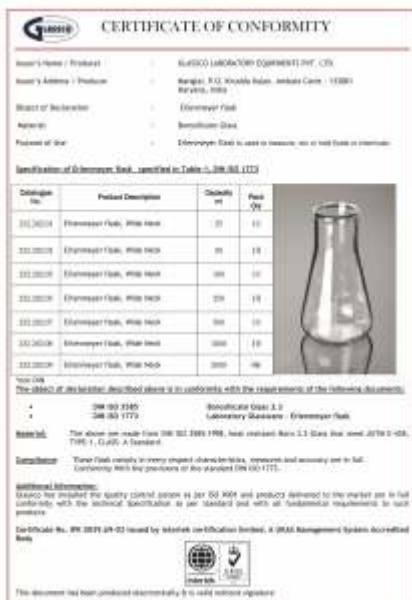

User Manual



A Glass Apart

Index

Adapters	Flange Septa Screw Thread	21-49
Beakers	Low Form/Tall Form, PP Euro Design, Tong SS & Brush	50-54
Bottles	Reagent, Screw Cap, Brush, Wash PP, Wide Mouth	55-70
Burettes	With Glass, PTFE, Needle Stopcock, Automatic, Clamp, Chloroform Bellow, Brush	71-80
Columns	Chromatography	81-85
Condensers	Coil, Air, Leibig, Allihn, Dimroth, Friedrichs, & Reflux	86-92
Crucibles	Euro Design, Quartz, Silica, Tong, Holder & Filter Crucible	93-96
Cylinders	Hexa/Round/PP Base, DIN/ISO/USP, PP & Brush	97-103
Desiccator	Plain & Vacuum	104
Dishes	Crystallizing, Disposable, Euro Design, Pestle & Mortar	105-108
Disposable	Boro Glass 5.1 & 7.0 with screw cap, Pasteur Pipettes	319
Distillation	Graham, Friedrichs, Alcohol Dist., Clevenger, Dean & Stark	109-117
Extraction Apparatus	Extractor, Soxhlet, Allihn & Dimroth	118-120
Filtration	All-Glass Filter with 47mm & 90 mm Disc. Filters	121-128
Flasks	Erlenmeyer, Conical, Pear Shape, Kjeldahl, PP, Filter	129-154
Flasks, Volumetric	USP, DIN, ASTM, ISO, NABL, PP, Stoppers	157-176
Funnels	Buchner, Squibb, Globe, Dropping, Gilson, Pear	177-199
Instruments	Hotplate, Stirrer, Shaker, Heating Mantle (Digital Analog, Centrifuge, Mixer, Water & Oil Bath, Soil & pH Testers	201-255
Joints	Cone, Socket, Spherical Joint	256-258
Lab Essentials	Gloves, Slides, Glass Stirrer, Boxes, Jars	259-266
Liquid Handling	Micropipettes, Tips, Rack, Trays, BTD	267-275
Metalware	Retort Stand, Ring, Clamp, Bosshead, Burner, Spatula	276-290
Pipettes	Pasteur, Serological, Volumetric, Mohr, PP, Box, Pump, Bulb, Stand, Controller	291-302
Quartzware	Beaker, Dish, Flask, Volumetric Flask, Funnel	303-305
Rubberware	Tube, Cork, Silicon, Euro Design, Tubing, Teats, Sheet	306-313
Tube	Round/Flat Bottom, Reusable, Culture, Reaction, Brush	314-330
Utility Set	Organic Chemistry Set	331-332
Vials	Screw Neck, TOC, Cryo, Rack, Box, Storage, Sv5	333-337
Water Distillation	Single, Double, Quartz Boiler, Softner	338-345

Adapter

All adapters come in different shapes and sizes are manufactured from **ASTM E 438 TYPE 1 Class A Boro 3.3 Glass**. that meets DIN/ISO 3585 & USP Type requirement.

Adapter, Bushing with Drip Tip

- Thick wall and reinforced rim.
- Outside of the bushing has full length and inside has smaller length
- For compact assembly of dissimilar joints



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
013.230.01	14/23	19/26	100	449
013.230.02	19/26	29/32	100	725
	10/19	14/23	100	

ASTM Sizes



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
013.478.01	14/20	19/22	1	462
013.478.01A	14/20	24/40	1	497
013.478.02	14/35	24/40	1	497

Adapter, Reduction

- Complies as per **DIN 12257**
- Small size socket at top & big size at bottom



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
013.202.01*	14/23	14/23	10	342
013.202.01A	14/23	19/26	10	374
013.202.02*	14/23	24/29	10	455
013.202.03	14/23	29/32	10	451
013.202.04*	19/26	24/29	10	455
013.202.05	19/26	29/32	10	553
013.202.06*	19/26	34/35	10	705
013.202.07*	19/26	40/38	10	684
013.202.08*	19/26	45/40	10	739
013.202.09*	19/26	55/44	10	1041
013.202.10*	24/29	29/32	10	553
013.202.11*	24/29	34/35	10	705
013.202.12*	24/29	40/38	10	674
013.202.13*	24/29	45/40	10	773
013.202.14*	24/29	50/42	10	868
013.202.15*	24/29	55/44	10	1045
013.202.16*	29/32	34/35	10	712
013.202.17*	29/32	40/38	10	795
013.202.18	29/32	45/40	10	804
013.202.19*	34/35	40/38	10	1126
013.202.20*	34/35	45/40	10	1218
013.202.21*	34/35	50/42	10	1473

* Non DIN/ISO

ASTM Sizes



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
013.470.02A	14/20	19/22	1	393
013.470.02	14/20	24/40	1	476
013.470.04	19/22	24/40	1	497
013.470.10	24/40	29/42	1	593
013.470.13	24/40	45/50	1	773

Adapter, Expansion

- Complies as per **DIN 12257**
- Big size socket at top & small size at bottom

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
014.202.01	19/26	14/23	10	359
014.202.02*	24/29	14/23	10	437
014.202.03*	24/29	19/26	10	437
014.202.03A	29/32	14/23	10	486
014.202.04	29/32	19/26	10	531
014.202.05*	29/32	24/29	10	531
014.202.06*	34/35	19/26	10	677
014.202.07*	34/35	24/29	10	677
014.202.08*	34/35	29/32	10	677
014.202.09*	40/38	24/29	10	787
014.202.10*	45/40	29/32	10	880

* Non DIN/ISO

ASTM Sizes

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
014.470.01	19/22	14/20	1	393
014.470.02	24/40	14/20	1	483
014.470.03	24/40	19/22	1	483
014.470.05	29/42	24/40	1	580
014.470.09A	45/50	24/40	1	897



Buy Now!



Buy Now!

Adapter, Multiple

- Complies as per **DIN 12594**
- Comes with two parallel necks with sockets & one cone at bottom

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
015.202.01	14/23	14/23	1	371
015.202.01A*	14/23	19/26	1	404
015.202.02	19/26	19/26	1	404
015.202.03*	19/26	24/29	1	450
015.202.04*	24/29	24/29	1	491
015.202.05*	19/26	34/35	1	570
015.202.06	29/32	29/32	1	643

* Non DIN/ISO

ASTM Sizes

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
015.470.01	14/20	14/20	1	400
015.470.03	19/22	19/22	1	442
015.470.04	24/40	24/40	1	538



Buy Now!



Buy Now!

Adapter



Buy Now!

GLASS
BORO
3.3



Adapter, Multiple

- Comes with two necks, one vertical & one at 45° and one cone at bottom

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
016.202.01	14/23	14/23	1	404
016.202.01A	14/23	19/26	1	404
016.203.01B	14/23	24/29	1	422
016.202.02	19/26	19/26	1	413
016.202.03	19/26	24/29	1	440
016.202.04	14/23	29/32	1	736
016.202.05	29/32	29/32	1	435



Buy Now!

GLASS
BORO
3.3



Adapter, Multiple

- Comes with two vertical necks & one at 45° and one cone at bottom

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
017.202.01	19/26	19/26	1	577
017.202.01A	19/26	24/29	1	590
017.202.02	19/26	29/32	1	684
017.202.03	24/29	24/29	1	937
017.202.04	29/32	29/32	1	1038

Adapter, Swan Neck

- Comes with screw thread for a thermometers or have a rubber hose

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
018.202.01	14/23	19/26	1	408
018.202.01A	19/26	19/26	1	391
018.202.02	19/26	24/29	1	325
018.202.03	24/29	24/29	1	478
018.202.04	29/32	29/32	1	526



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Adapter, Receiver Delivery

- With short stem

Item Code	Socket Size	Approx Stem Length (mm)	Pack of	Price / Piece
019.202.01	14/23	65	10	226
019.202.02	19/26	65	10	265
019.202.03	24/29	65	10	305
019.202.04	29/32	65	10	380



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

Socket

Adapter



GLASS
BORO
3.3

Chemical
Resistant

Socket



Buy Now!

Adapter, Receiver Delivery

- With Long Stem

Item Code	Socket Size	Approx Stem Length (mm)	Pack of	Price / Piece
019.202.05	14/23	190	10	352
019.202.06	19/26	200	10	352
019.202.07	24/29	200	10	404
019.202.08	29/32	200	10	491



GLASS
BORO
3.3

Chemical
Resistant

Socket



Buy Now!

Adapter, Receiver

- Straight

Item Code	Socket Size	Pack of	Price / Piece
020.202.01	14/23	10	226
020.202.02	19/26	10	265
020.202.03	24/29	10	305
020.202.04	29/32	10	397

Adapter, Receiver Bend with Vent

- With Drip Tip, 105°
- With side arm to provide vent to atmosphere
- Avoids the problem of closed system

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
021.202.01	14/23	14/23	1	318
021.202.02	19/26	19/26	1	366
021.202.03	19/26	24/29	1	432
021.202.04	24/29	24/29	1	471
021.202.05	29/32	29/32	1	798



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

DRIP
TIP

Adapter, Receiver, Plain Bend

- With Drip Tip, 105°
- Without vent
- Provide a simple vapor path between flask & Distillation condensers

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
025.202.00	14/23	14/23	1	348
025.201.00A	14/23	19/26	1	348
025.202.01	19/26	19/26	1	366
025.202.02	19/26	24/29	1	391
025.202.03	24/29	24/29	1	471
025.202.04	29/32	29/32	1	684



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE


DRIP
TIP

ASTM Sizes

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
025.470.06	24/40	24/40	1	511



Buy Now!

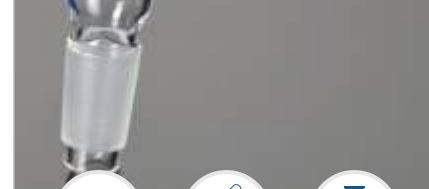

GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

DRIP
TIP

Adapter



Buy Now!

Adapter, Recovery Bend, Sloping End

- With Drip Tip, 75°

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
026.202.01	14/23	14/23	1	281
026.202.02	24/29	14/23	1	375
026.202.03	19/26	19/26	1	375
026.202.04	24/29	19/26	1	387
026.202.05	29/32	19/26	1	503
026.202.06	29/32	29/32	1	571
026.202.07	24/29	24/29	1	387
026.202.08	34/35	24/29	1	598
026.202.09	29/32	24/29	1	586
026.202.10	34/35	34/35	1	672

ASTM Sizes



Buy Now!

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
043.470.03	24/40	24/40	1	530



Buy Now!

Adapter, Receiver, Vacuum Straight

- Complies as per DIN 12594
- With Drip Tip & delivery stem within cone
- Straight with Vacuum connection & Screw Thread Adapter

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
022.202.01	14/23	14/23	1	325
022.202.02*	14/23	19/26	1	339
022.202.02A	19/26	19/26	1	399
022.202.03*	19/26	24/29	1	440
022.202.04*	24/29	24/29	1	481
022.202.05*	24/29	29/32	1	570
022.202.06	29/32	29/32	1	951

ASTM Sizes



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
022.472.04S	24/40	24/40	1	553

Adapter, Receiver, Vacuum Angled

- Complies as per **DIN 12594**
- With Drip Tip & delivery stem within cone
- Bend with Vacuum Connection & Screw Thread Adapter

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
022.201.01	14/23	14/23	1	377
022.201.02*	14/23	19/26	1	391
022.201.03	19/26	19/26	1	630
022.201.04*	19/26	24/29	1	507
022.201.05*	24/29	24/29	1	554
022.201.06*	24/29	29/32	1	670
022.201.07	29/32	29/32	1	882

* Non DIN/ISO



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Screw



Buy Now!

ASTM Sizes

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
022.471.01S	14/20	14/20	1	403
022.471.03S	19/22	19/22	1	475
022.471.05S	24/40	24/40	1	580

Adapter, Distillation 105°

- Fabricated from inner Drip tube inside cone at bottom & a socket at the top

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
025.475.01	14/20	14/20	1	331



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Adapter, Receiver, Side Socket

- Cone with Drip Tip
- With One Side Inclined at an angle of 105°



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
023.202.01	14/23	14/23	1	466
023.202.02	19/26	19/26	1	598
023.202.03	19/26	24/29	1	641
023.202.04	24/29	24/29	1	735
023.202.05	29/32	29/32	1	909

GLASS
BORO
3.3



TWO
SOCKET

ONE
CONE



Adapter, Receiver

- With Multiple Connection & Screw Thread
- Can be connected upto three flasks
- With side arm for connection to a vacuum supply
- With socket for connection to condenser
- Two parallel cones & one cone at 45°



Buy Now!

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
024.202.01	14/23	14/23	1	989
024.202.02	14/23	19/26	1	1044
024.202.03	19/26	19/26	1	1174

GLASS
BORO
3.3



ONE
SOCKET

THREE
CONE



Adapter, Distilling Receiver, With Hose Connection

- Distribution Adapter, Cow-type design having three receivers spaced 40° apart
- Has 135° angle between the center line of the condenser and the receiver tubes
- This receiver can be used with short path style distilling heads
- Three receiver with cone & a glass hose connection for vacuum

Item Code	Socket Size	Cone Size	Pack of	Price /Piece
024.471.03	24/40	24/40	1	1294



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

THREE
CONE

Screw

Adapter, Distilling Receiver, Without Hose Connection

- Distribution Adapter, Cow-type design having three receivers spaced 40° apart
- Has 135° angle between the center line of the condenser and the receiver tubes
- This receiver can be used with short path style distilling heads

Item Code	Socket Size	Cone Size	Pack of	Price /Piece
024.470.01	14/20	14/20	1	978
024.470.02	24/40	24/40	1	1222



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

THREE
CONE



Buy Now!

Adapter, Distilling Cow Receiver

- With one female/socket joint and four cone with drip-tip male joints
- Flask 100 ml

Item Code	Socket Size	Cone Size	Pack of	Price /Piece
024.475.01	14/20	14/20	1	992

GLASS
BORO
3.3



ONE
SOCKET

FOUR
CONE



Adapter, Recovery Bend, Vertical

- With Drip Tip
- Used in distillation assembly



Buy Now!

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
027.202.01	14/23	14/23	1	394
027.202.02	19/26	19/26	1	483
027.202.03	24/29	19/26	1	516
027.202.04	24/29	24/29	1	612
027.202.05	29/32	29/32	1	801

GLASS
BORO
3.3



TWO
CONE



Adapter, Still Head Plain

- Complies with DIN 12594
- With Drip Tip
- With Thermometer Socket
- Used in distillation assembly for connecting flask to condenser

Item Code	Socket Size	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
028.202.01	14/23	14/23	14/23	1	530
028.202.02	14/23	19/26	19/26	1	591
028.202.03*	14/23	24/29	19/26	1	672
028.202.04	14/23	29/32	19/26	1	740
028.202.05*	14/23	34/35	19/26	1	855
028.202.06*	14/23	24/29	24/29	1	690
028.202.07*	14/23	34/35	24/29	1	999
028.202.08*	14/23	29/32	24/29	1	753
028.202.09*	14/23	29/32	29/32	1	1066
028.202.10*	14/23	34/35	29/32	1	1024

* Non DIN/ISO

ASTM Sizes

Item Code	Socket Size	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
028.470.02	19/22	19/22	19/22	1	651
028.470.03	24/40	24/40	24/40	1	778
028.470.04	14/20	14/20	14/20	1	566



Buy Now!



GLASS BORO 3.3

Chemical Resistant

ONE SOCKET

TWO CONE

DRIP TIP



Buy Now!

Adapter, Claisen Heads

- Complies with DIN 12594
- With 2 x B14 Socket, One cone 75°
- Still heads but with extra socket to accept dropping funnel or stirrer etc.

Item Code	Socket Size	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
029.202.01	14/23	14/23	14/23	1	659
029.202.02*	14/23	19/26	19/26	1	727
029.202.03*	14/23	24/29	19/26	1	769
029.202.04*	14/23	24/29	24/29	1	832
029.202.05*	14/23	29/32	29/32	1	897
029.202.06*	14/23	34/35	24/29	1	996

* Non DIN/ISO



Buy Now!



GLASS BORO 3.3

Chemical Resistant

TWO SOCKET

TWO CONE

Adapter



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

DRIP
TIP



Buy Now!

Adapter, Splash Heads, Straight

- With Drip Tip
- Pear shape
- Used between flask & condenser to stop movement of raw liquid

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
030.202.01	14/23	14/23	1	598
030.202.02	19/26	24/29	1	659
030.202.03	29/32	29/32	1	745

ASTM Sizes



Buy Now!

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price / Piece
030.402.04A	100	24/40	24/40	1	806



GLASS
BORO
3.3

Chemical
Resistant

TWO
CONE



Buy Now!

Adapter, Splash Heads

- Vertical, Pear shape 105°
- Lower cone accepts flask & upper cone accepts condenser

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
031.202.01	14/23	14/23	1	740
031.202.02	19/26	19/26	1	740
031.202.03	24/29	19/26	1	769
031.202.04	24/29	24/29	1	958
031.202.05	29/32	29/32	1	1027

Adapter, Splash Heads, Sloping

- With Drip Tip 75°
- Pear Shape

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
032.202.01	14/23	14/23	1	703
032.202.02	19/26	19/26	1	701
032.202.03	24/29	19/26	1	740
032.202.04	24/29	24/29	1	801
032.202.05	29/32	29/32	1	829



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

TWO
CONE

DRIP TIP


Adapter, Steam Distillation Heads, Sloping

- With Drip Tip 75°
- With screw thread
- With integral stem

Item Code	Cone Size to fit flask	Cone Size to fit Condenser	Pack of	Price / Piece
033.202.01	24/29	19/26	1	1027
033.202.02	34/35	19/26	1	1270
033.202.03	34/35	24/29	1	1312



Buy Now!

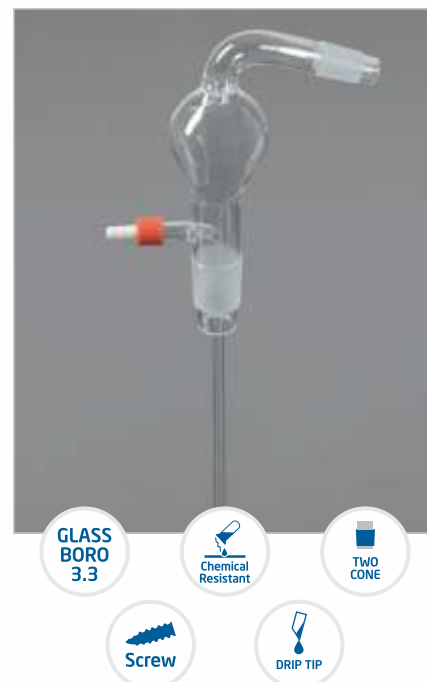

GLASS
BORO
3.3

Chemical
Resistant

TWO
CONE

Screw

DRIP TIP

Adapter, Splash Head, Rotary Evaporator

- For use with rotary evaporators
- Prevents contents of the flask from being drawn into condenser
- Modified bump traps provide expanded volume from reaction that have tendency of excessive foam.



Buy Now!

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price / Piece
030.275.06	150	29/32	19/26	1	919
030.275.06A	150	29/32	24/29	1	948
030.275.06B	150	29/32	29/32	1	976

ASTM Sizes



Buy Now!

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price / Piece
030.475.02	250	24/40	24/40	1	1627
030.475.04A	100	24/40	24/40	1	919
030.475.01A	250	24/40	14/20	1	1584
030.475.04	100	24/40	14/20	1	891

Adapter, Splash Head, Rotary Evaporator, Anti-climb

- For use with rotary evaporators
- Useful for liquids that have tendency to foam



Buy Now!

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price / Piece
030.276.03	150	29/32	19/26	1	919
030.276.03A	150	29/32	24/29	1	948
030.276.03B	150	29/32	29/32	1	976

ASTM Sizes



Buy Now!

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price / Piece
030.476.02	250	24/40	24/40	1	1627

Adapter, Flash Chromatography Reservoirs

- Made from ASTM E-438, Type-1, Class-A, Boro 3.3 glass

Item Code	Cap. (ml)	Socket Size	Cone Size	Pack of	Price /Piece
030.480.02A	250	24/40	24/40	1	1627



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Adapter, Cone

- With Glass stopcock
- With Drip Tip

Item Code	Cone Size	Stopcock Bore	Angle	Pack of	Price / Piece
034.202.01	14/23	2.5	Right Angle	1	1323
034.202.02	19/26	2.5	Right Angle	1	1380
034.202.03	24/29	2.5	Right Angle	1	1438
034.202.04	29/32	2.5	Right Angle	1	1826
034.260.01	14/23	2.5	Straight	1	1323
034.260.02	19/26	2.5	Straight	1	1380
034.260.03	24/29	2.5	Straight	1	1438
034.260.04	29/32	2.5	Straight	1	1826



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

GLASS

DRIP TIP

*PS : The above Adapter can also be supplied with PTFE key or PTFE Needle valve Stopcock.
Please ask for prices separately.*

Adapter, Socket, with Glass stopcock



Buy Now!

Item Code	Socket Size	Stopcock Bore	Pack of	Price / Piece
035.202.01	14/23	2.5	1	1325
035.202.02	19/26	2.5	1	1380
035.202.03	24/29	2.5	1	1438
035.202.04	29/32	2.5	1	1817

PS: The above Adapter can also be supplied with PTFE key or PTFE Needle valve Stopcock. Please ask for prices separately.

GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

GLASS

Adapter, Vacuum with ASTM Sizes

- With Teflon Stopcock
- At 90°



Buy Now!

Item Code	Cone Size	Pack of	Price / Piece
034.470.02	19/22	1	1366

GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

PTFE

Adapter, Vacuum

- With Teflon Stopcock
- Straight

Item Code	Cone Size	Pack of	Price /Piece
034.470.01J	14/20	1	1366
034.470.03J	24/40	1	1380



Buy Now!



Adapter, Flushing

- With 2mm T-bore PTFE stopcock

Item Code	Cone Size	Pack of	Price /Piece
048.202.01	24/40	1	1409



Buy Now!



Adapter, Stopcock, Socket

- With Rotaflow PTFE stopcock providing fine flow control and positive closure
- Detachable plastic screw thread connectors allows hose etc
- To be fitted easily and safely



Buy Now!

Item Code	Socket Size	Bore Size (mm)	Pack of	Price / Piece
035.212.01	14/23	3.0	1	633
035.212.02	19/26	3.0	1	661
035.212.03	24/29	3.0	1	690

GLASS
BORO
3.3



ONE
SOCKET



Screw



360°
NEEDLE

Adapter, Stopcock, T-shape, Cone

- Made from ASTM E-438, Type-1, Class-A, Boro 3.3 glass
- With Rotaflow PTFE stopcock providing fine flow control and positive closure
- Detachable plastic screw thread connectors allows hose etc. to be fitted easily and safely



Buy Now!

Item Code	Cone Size	Bore Size (mm)	Pack of	Price / Piece
046.212.01	14/23	3.0	1	633
046.212.02	19/26	3.0	1	661
046.212.03	24/29	3.0	1	690

GLASS
BORO
3.3



ONE
CONE



Screw



360°
Rotaflow

Adapter, Cone with Rubber Tubing

- Right angle connection for attachment of rubber hose
- With Drip Tip
- With Screw Thread

Item Code	Cone Size	Pack of	Price / Piece
036.202.01	14/23	1	232
036.202.02	19/26	1	272
036.202.03	24/29	1	312
036.202.04	29/32	1	432



Buy Now!

ASTM Sizes

Item Code	Cone Size	Pack of	Price / Piece
036.475.01S	14/20	1	262
036.475.03S	24/40	1	345



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

Screw

DRIP TIP

Adapter, Vacuum/Argon (Nitrogen), Straight

- Hose connection at top and male joint

Item Code	Cone Size	Pack of	Price / Piece
020.475.01	14/20	1	330
020.475.03	24/40	1	378



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE



Buy Now!

Adapter Inlet, Fritted

- With an extra coarse disc between the serrated hose connection and the inner joint
- Fritted disc prevents solids from being introduced into the system
- Hose connection has a O.D. of 8mm

Item Code	Cone Size	Pack of	Price /Piece
036.471.01	14/20	1	718
036.471.04A	24/40	1	883



Buy Now!

Adapter, Cone with Stem to Rubber Tubing

- Right angle connection for attachment of rubber hose

Item Code	Cone Size	Pack of	Price / Piece
037.202.01	14/23	1	341
037.202.02	19/26	1	396
037.202.03	24/29	1	435
037.202.04	29/32	1	526

Adapter, Tubing Straight

- With Hooks
- With straight connection for attachment of rubber hose

Item Code	Socket Size	Pack of	Price / Piece
038.202.01	14/23	1	240
038.202.02	19/26	1	277
038.202.03	24/29	1	294
038.202.04	29/32	1	357



Buy Now!

ASTM Sizes

- Without Hooks

Item Code	Socket Size	Pack of	Price / Piece
020.470.01	14/20	1	248
020.470.03	24/40	1	311



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

Adapter, Socket to cone

- With side arm & screw thread for attachment of rubber hose
- Socket at top & cone at bottom

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
039.202.01	14/23	14/23	1	318
039.202.02	14/23	19/26	1	331
039.202.03	14/23	24/29	1	404
039.202.04	14/23	29/32	1	473
039.202.05	19/26	19/26	1	391
039.202.06	19/26	24/29	1	432
039.202.07	19/26	29/32	1	498
039.202.08	24/29	24/29	1	471
039.202.09	24/29	29/32	1	570
039.202.10	29/32	29/32	1	657



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Screw

Adapter, Vacuum or Gas 90°

- Hose connection on the side and a male joint



Buy Now!

Item Code	Cone Size	Pack of	Price / Piece
341.470.02	14/20	1	324
341.470.03	19/22	1	338
341.470.05A	24/40	1	366
341.470.05	29/42	1	407
341.470.04	35/20	1	442

GLASS
BORO
3.3



ONE
CONE

Adapter, Vacuum or Gas 90°

- 2 Sides Hose connection and a male joint



Buy Now!

Item Code	Cone Size	Pack of	Price / Piece
046.202.04	24/40	1	442

GLASS
BORO
3.3



ONE
CONE

Adapter, Drying Tube

- A drying tube or guard tube is a tube-like piece of apparatus used to house a disposable solid desiccant, where in at one end the tube-like structure terminates in a ground glass joint for use in connecting the drying tube to a reaction vessel, for the purpose of keeping the vessel free of moisture.

Item Code	Cone Size	Pack of	Price / Piece
041.202.01	14/23	10	268
041.202.02	19/26	10	324
041.202.03	24/29	10	368
041.202.04	29/32	10	443



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

ASTM Sizes

Item Code	Cone Size	Pack of	Price / Piece
041.471.01	14/20	1	283
041.471.03	24/40	1	393



Buy Now!

Adapter, Drying Tube Straight

- Drying tube is a tube-like piece of apparatus used to keeping the vessel free of moisture, of ten used in organic syntheses
- There is usually a standard joint for use in connecting the drying tube to a reaction flask
- In use, the drying tube is filled with a rechargeable desiccant such as calcium chloride, and the open end of drying tube is partially blocked

Item Code	Socket Size	Cone Size	Pack of	Price / Piece
041.470.02	19/22	19/22	1	518



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
SOCKET

ONE
CONE

Adapter, for Pocket Thermometer

- For incorporating thermometers into jointed-ware assemblies
- Pocket fits most still heads



Buy Now!

Item Code	Cone Size	Approx Stem Length (mm)	Pack of	Price / Piece
042.202.01	14/23	45	10	458
042.202.02	19/26	45	10	541
042.202.03	24/29	45	10	614

GLASS
BORO
3.3



Chemical
Resistant



ONE
CONE

Adapter, Air Leak Tube/ Gas Inlet Tube

- These tubes are known for their accurate dimensions
- Compact size, light weight and easy maintenance
- Ensure their quality and durability
- We test these tubes on various well-defined parameters



Buy Now!

Item Code	Cone	Pack of	Price / Piece
044.202.01	14/23	10	253
044.202.02	19/26	10	283
044.202.03	24/29	10	315
044.202.04	29/32	10	454

GLASS
BORO
3.3



Chemical
Resistant



ONE
CONE



LIGHT
WEIGHT



Durable

Adapter, Cone Screw Thread

- Ideal for securing of thermometer or gas inner tube
- With a compression cap & O-ring

Item Code	Cone Size	Acceptable Dia through Screw Thread mm	Pack of	Price / Piece
056.202.01	14/23	6	10	331
056.202.02	19/26	6	10	331
056.202.03	24/29	6	10	384
056.202.04	29/32	6	10	503



Buy Now!

ASTM Sizes

Item Code	Cone Size	Pack of	Price / Piece
056.470.01A	14/20	1	359
056.470.02A	19/22	1	359
056.470.03A	24/40	1	414



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

Screw

Adapter, Thermometer with Hose Connection

- With a compression cap & O-ring to form a vacuum tight seal

Item Code	Cone Size	Pack of	Price / Piece
056.468.01	14/10	1	469



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

ONE
CONE

Screw

Adapter, Inlet/Thermometer

- With a compression cap



Buy Now!

Item Code	Cone Size	Pack of	Price /Piece
056.467.01	14/10	1	359

GLASS
BORO
3.3



Adapter, Inlet

- Permits insertion of plain stem thermometers or bleed tubes supplied with one holed rubber adapter



Buy Now!

Item Code	Cone Size	Pack of	Price /Piece
036.472.01	14/20	1	352
036.472.02	19/22	1	386
036.472.03	24/40	1	414

GLASS
BORO
3.3



For Socket: Non-Serrated in Natural Rubber

Item Code	Size	Pack of	Price / Pack
410.700.01	B - 14	10	470
410.700.02	B - 19	10	660
410.700.03	B - 24	10	780
410.700.04	B - 29	10	880



Buy Now!



For Socket: Serrated in Natural Rubber

Item Code	Size	Pack of	Price / Pack
410.700.05	B - 14	10	470
410.700.06	B - 19	10	660
410.700.07	B - 24	10	820
410.700.08	B - 29	10	990



Buy Now!

For Socket: Non-Serrated in Silicon Rubber

Item Code	Size	Pack of	Price / Pack
405.700.01	B - 14	10	840
405.700.02	B - 19	10	1170
405.700.03	B - 24	10	1360
405.700.04	B - 29	10	2140



Buy Now!



For Socket: Serrated in Silicon Rubber

Item Code	Size	Pack of	Price / Pack
405.700.05	B - 14	10	840
405.700.06	B - 19	10	1170
405.700.07	B - 24	10	1360
405.700.08	B - 29	10	2140



Buy Now!

Turnover Flange Septa

- Ideal for moisture or air sensitive applications.
- Excellent re-sealing capability.

For Test Tube: Non - Serrated in Natural Rubber



Buy Now!

Item Code	Size	Pack of	Price / Pack
410.600.01	12	10	340
410.600.02	15	10	410
410.600.03	18	10	530
410.600.04	25	10	680

For Test Tube: Serrated in Natural Rubber



Buy Now!

Item Code	Size	Pack of	Price / Pack
410.600.05	12	10	340
410.600.06	15	10	410
410.600.07	18	10	530
410.600.08	25	10	680

For Test Tube: Non - Serrated in Natural Rubber



Buy Now!

Item Code	Size	Pack of	Price / Pack
405.600.01	12	10	500
405.600.02	15	10	630
405.600.03	18	10	880
405.600.04	25	10	1010

For Test Tube: Serrated in Natural Rubber



Buy Now!

Item Code	Size	Pack of	Price / Pack
405.600.05	12	10	500
405.600.06	15	10	630
405.600.07	18	10	880
405.600.08	25	10	1010



Plastic Hose Connection



Buy Now!

Item Code	Thread GL	Type	Pack of	Price / Piece
056.474.01	14	Straight	1	34

Screw Thread

- Polyethylene



Buy Now!

Item Code	Thread GL	Pack of	Price / Piece
056.470.01	14	100	34



Manufactured from **ASTM E 438 TYPE 1 CLASS A BORO 3.3 GLASS**. These beakers comply to **ISO 3819, DIN 12331 ASTM E - 960 and USP** standards. These beakers come with white graduation and marking area for use with an ordinary pencil. The beakers has a uniform wall thickness which make it ideal for heating application. These Beakers have excellent thermal performance and are highly resistant to chemical attack.

These beakers can be provided in Blue color printing. For ordering just mention the colour you need.

Beaker, Low form with spout

- Complies with DIN 12331 & ISO 3819
- Large labeling field for easy marking
- Uniform wall thickness & Ideal for heating liquids
- Clear metric Graduation for convenience
- Highly resistant to chemical attack

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Piece
229.202.01	5	22	30	10	148
229.202.02	10	26	35	10	148
229.202.03	25	34	51	10	148
229.202.04	50	42	58	10	104
229.202.05	100	50	70	10	104
229.202.06	150	60	88	10	104
229.202.07	250	70	95	10	113
229.202.08	400	80	110	10	184
229.202.08A*	500	83	118	8	178
229.202.09	600	90	125	8	246
229.202.10	1000	105	157	6	360
229.202.11	2000	132	185	4	734
229.202.13	3000	152	210	1	1981
229.202.14	5000	170	270	1	2910
229.202.15*	10000	220	350	1	9309

*Non DIN



Beaker, Low Form, with Double Capacity Scale

- Complies with ASTM E-960, TYPE 1
- Printed in white colour enamel
- Large labeling field for easy marking
- Uniform wall thickness
- Ideal for heating liquids
- Printed in double scale
- Highly resistant to chemical attack

Item Code	Capacity (ml)	Graduation Interval (ml)	Graduation Range (ml)	Pack of	Price / Piece
229.402.02	10	-	-	12	149
229.402.03	20	5	5-15	12	149
229.402.03A	30	5	5-25	12	99
229.402.04	50	5	10-45	12	99
229.402.05	100	10	20-80	12	99
229.402.06	150	10	20-140	12	116
229.402.07	250	25	25-200	12	182
229.402.08	400	25	25-325	12	176
229.402.09	600	50	50-500	6	224
229.402.10	1000	50	50-1000	6	351
229.402.11	2000	100	200-1800	4	703
229.402.14	4000	250	250-3500	1	2173



Beakers



Buy Now!

Beaker, Low Form, Heavy Wall, with Double Capacity Scale

- Complies with ASTM E-960, TYPE-2, BORO 3.3 GLASS
- Printed in matt finish white colour enamel.
- Printed in double scale
- Uniform wall thickness with re-inforced Rim & Spout
- Not recommended for use on hot plates

Item Code	Capacity (ml)	Graduation Interval (ml)	Graduation Range (ml)	Pack of	Price / Piece
229.235.07	250	25	25-200	12	248
229.235.08	400	25	25-325	12	319
229.235.09	600	50	50-500	6	374
229.235.10	1000	50	50-1000	6	721
229.235.11 *	2000	100	200-1800	4	1216
229.235.14	4000	250	250-3500	1	4928

*Non ASTM Standards



Buy Now!

Beaker, Tall form with spout

- Complies with DIN 12331 & ISO 3819
- Large labeling field for easy marking
- Clear Graduation for easy reading convenience
- Uniform wall thickness
- Ideal for heating liquids
- Clear metric Graduation for convenience
- Highly resistant to chemical attack

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Piece
230.202.02	50	38	70	10	181
230.202.03	100	48	80	10	185
230.202.04	150	54	95	10	196
230.202.05	250	60	120	10	188
230.202.06	400	70	130	10	249
230.202.07A *	500	75	142	8	254
230.202.07	600	80	150	8	399
230.202.08	1000	90	192	6	502

*Non DIN

Beaker, Tall form, Without Spout

- Complies with DIN 12331 & ISO 3819
- Large labeling field for easy marking
- Clear Graduation for easy reading convenience
- Uniform wall thickness
- Ideal for heating liquids
- Clear metric Graduation for convenience
- Highly resistant to chemical attack

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Piece
230.205.02	50	38	70	10	153
230.205.03	100	48	80	10	157
230.205.04	150	54	95	10	165
230.205.05	250	60	120	10	172
230.205.06	400	70	130	10	241
230.205.06AB*	500	75	142	8	245
230.205.07	600	80	150	8	321
230.205.08	1000	90	192	6	476

*Non DIN



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

TALL FORM

Beaker, Tablet Disintegration

- Specially designed for Tablet disintegration machine
- Large labeling field that enables easy marking
- Highly resistant to chemical attack

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Piece
230.209.08	1000	105	145	10	453



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Beakers

Beaker, Euro Design

- Made from Polypropylene
- These jugs are clear & autoclavable
- Graduation for easy reading



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Pack
101.303.01	25	12	268
101.303.02	50	12	326
101.303.03	100	12	367
101.303.04	250	12	652
101.303.05	500	12	1008
101.303.06	1000	6	928
101.303.07	2000	6	1825
101.303.08	5000	2	1491



Beaker, Measuring Jugs, Euro Design (PP)

- Made from Polypropylene
- These jugs are clear, autoclavable
- Provided with a handle for easy & convenient lifting
- Raised graduation for easy reading



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Pack
179.303.01	250	12	923
179.303.05	500	12	1510
179.303.06	1000	6	1496
179.303.07	2000	6	2243
179.303.08	3000	6	1657
179.303.09	5000	4	2658



Beaker, Tong, SS

- Made of stainless steel
- Silicon sleeve for temp upto 280° C
- Fibre glass yarn to resist direct flame
- To hold beakers upto 2 Litres (155mm OD)

Item Code	Type	Length (mm)	Material	Max Temp	Pack of	Price / Pack
396.303.01	Beaker	250	Glass Fibre	500°C	4	1956
396.303.02	Beaker	300	Glass Fibre	500°C	4	2080
396.303.03	Beaker	250	Silicon	280°C	4	1640
396.303.04	Beaker	300	Silicon	280°C	4	1652



Buy Now!



SS

Si
Sleeved
280°C

Glass
Sleeved
500°C

Beaker, Brush

- Brush with wirewound polyester bristles
- An extra-large brush ideal for cleaning beakers

Item Code	Type	Material	Pack of	Price / Pack
593.303.06	Beaker Brush	Nylon	50	5250



Buy Now!



Nylon

Bottles



Bottle, Reagent Clear Narrow Mouth

- Complies with **DIN/ISO 4796**
- Autoclavable PP screw cap and pouring ring
- Printed with retrace code.
- Specially designed PP Pouring rings for drip-free operations
- Clear scale Graduation & large marking area
- These complete bottles are autoclavable & can be sterilized
- These bottles are highly mechanically durable and chemical resistance

Item Code	Capacity (ml)	O.D. x Height (mm)	Screw Thread	Pack of	Price / Piece
274.205.00*	10**	36x50	GL-25	10	557
274.202.00B	25**	36x70	GL-25	10	372
274.202.00	50**	46x87	GL-32	10	454
274.202.00C	50	46x87	GL-45	10	470
274.202.01	100	56x100	GL-45	10	408
274.202.01B	150	60x120	GL-45	10	479
274.202.02	250	70x138	GL-45	10	409
274.202.03	500	86x176	GL-45	10	460
274.202.04	1000	101x225	GL-45	10	709
274.202.05	2000	136x260	GL-45	10	1256
274.202.06*	3000	158x295	GL-45	2	6391
274.202.07	5000	181x330	GL-45	1	7193
274.202.08	10000	227x410	GL-45	1	12116
274.202.09	20000	288x505	GL-45	1	22566

*Non DIN

** 10, 25 & 50ml without pouring rings



Bottle, Reagent Amber Screw Cap

- Complies with **DIN/ISO 4796**
- Autoclavable PP screw cap and pouring ring
- Printed with a retrace code.
- Specially designed PP Pouring rings for drip-free operations
- Clear scale Graduation & large marking area
- These complete bottles are autoclavable & can be sterilize
- These bottles are highly mechanically durable and chemical resistance
- The uniform Amber colour is highly durable and chemical resistance
- These bottles are ideal for long term storage of light sensitive media & substance

Item Code	Capacity (ml)	O.D. x Height (mm)	Screw Thread	Pack of	Price / Piece
275.205.00*	10*	36x50	GL-32	10	684
275.202.00B	25*	36x70	GL-32	10	581
275.202.00	50*	46x87	GL-32	10	690
275.202.00C	50	46x87	GL-45	10	690
275.202.01	100	56x100	GL-45	10	704
275.202.02	250	70x138	GL-45	10	737
275.202.03	500	86x176	GL-45	10	882
275.202.04	1000	101x225	GL-45	10	1151
275.202.05	2000	136x260	GL-45	10	2165
275.202.06	3000	158x295	GL-45	1	11554
275.202.07	5000	183x330	GL-45	1	11906
275.202.08	10000	227x410	GL-45	1	17205
275.202.09	20000	288 x 505	GL-45	1	31100

*Non DIN

** 10, 25 & 50ml without pouring rings

Bottle, Reagent, Clear, Square Type, Wide Mouth, Graduated

- With DIN Thread
- With PP Screw cap (GL-80)

Item Code	Capacity (ml)	Approx B x W x H (mm)	Thread Specification Approx O.D. (mm)	Pack of	Price / Piece
274.209.03	500	94 x 94 x 141	GL-80	10	1185
274.209.04	1000	105 x 105 x 187	GL-80	10	1310
274.209.05	2000	115 x 115 x 260	GL-80	10	2055
274.209.07	5000	160 x 160 x 357	GL-80	10	12700

*Height including Cap.



Buy Now!



Bottle, Reagent, Amber, Square Type, Wide Mouth, Graduated


- With DIN Thread
- With PP Screw cap (GL-80)

Item Code	Capacity (ml)	Approx B x W x H (mm)	Thread Specification Approx O.D. (mm)	Pack of	Price / Piece
275.210.03	500	94 x 94 x 141	GL-80	10	1600
275.210.04	1000	105 x 105 x 187	GL-80	10	1770
275.210.05	2000	115 x 115 x 260	GL-80	10	2785
275.210.07	5000	160 x 160 x 357	GL-80	10	17140

*Height including Cap.



Buy Now!

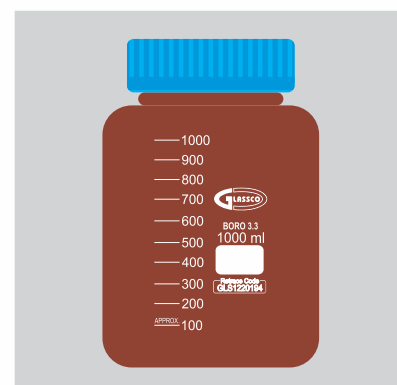


Bottle, HPLC Mobile Phase

- Complies with **USP TYPE 1 BORO 3.3 Glass**
- Conical bottom delivers all of solvent without reservoir tilting
- Prevents leaching of any extractable into the mobile phase solvents
- With PP Screw cap (GL-45)

Item Code	Capacity (ml)	Screw Thread	Approx O.D. x Height* (mm)	Pack of	Price / Piece
274.213.04	1000	GL-45	101 x 225	10	2605
274.213.05	2000	GL-45	136 x 260	10	4166



Buy Now!

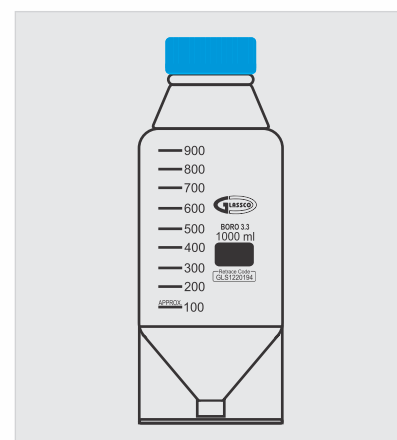

PP Safety Caps (HPLC)

- With filter valve
- Autoclavable upto 140°C


Item Code	Screw Thread	No of Port	Fitting & Plug	Pack of	Price / Piece
275.205.04	GL-45	1	Fitting 4 x Plug 4 x 1 Filter	4	3350
275.205.05	GL-45	2	Fitting 8 x Plug 8 x 1 Filter	4	3650
275.205.08	GL-45	3	Fitting 12 x Plug 12 x 1 Filter	4	3745
275.205.09	GL-45	4	Fitting 16 x Plug 16 x 1 Filter	4	3800
275.205.10	GL-45	5	Fitting 20 x Plug 20 x 1 Filter	4	3850
275.506.01	Filter Valve	-	Fitting 4 x Plug 4 x 1 Filter	4	3650



Bottles



Buy Now!

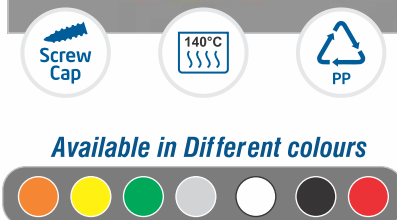

Available in Different colours



Buy Now!

Bottle, Screw Cap

- Made from Polypropylene
- Autoclavable upto 140° C

Item Code	Colour Description	Thread Specification	Pack of	Price / Piece
275.205.01	Blue	GL 45	10	98
275.205.01O	Orange	GL 45	10	104
275.205.01Y	Yellow	GL 45	10	104
275.205.01G	Green	GL 45	10	104
275.205.01E	Grey	GL 45	10	104
275.205.01W	White	GL 45	10	104
275.205.01B	Black	GL 45	10	104
275.205.01R	Red	GL 45	10	104
275.205.01AB	Blue	GL 80	10	180

Item Code	Colour Description	Thread Specification	Pack of	Price / Piece
275.205.03	Blue	GL 25	10	52
275.205.03O	Orange	GL 25	10	52
275.205.03Y	Yellow	GL 25	10	52
275.205.03G	Green	GL 25	10	52
275.205.03E	Grey	GL 25	10	52
275.205.03W	White	GL 25	10	52
275.205.03B	Black	GL 25	10	52
275.205.03R	Red	GL 25	10	52



Buy Now!



Bottle, Pouring Ring, Blue Colour

- Made from Polypropylene
- Autoclavable upto 140° C

Item Code	Colour Description	Thread Specification	Pack of	Price / Piece
275.205.02	Blue	GL 45	10	40
275.205.02B	Black	GL 45	10	31
275.205.02E	Grey	GL 45	10	31
275.205.02G	Green	GL 45	10	31
275.205.02O	Orange	GL 45	10	31
275.205.02R	Red	GL 45	10	31
275.205.02W	White	GL 45	10	31
275.205.02Y	Yellow	GL 45	10	31
275.205.02AB	Blue	GL 80	10	75



Buy Now!



Teflon Pouring Ring for Bottle, White Colour

- Made from PTFE (Teflon)
- Autoclavable upto 140° C

Item Code	Colour Description	Thread Specification	Pack of	Price / Piece
275.207.01	White	GL 45	10	127

Screw Cap, for Reagent Bottle

- Made from PTFE (Teflon)
- Autoclavable

Item Code	Colour Description	Thread Specification	Pack of	Price / Piece
275.204.01	White	GL 45	10	966

Bottle, Reagent Narrow Mouth, Clear

- Complies with **DIN/ISO 4796-2**
- Made from **ASTM 438** TYPE 1 BORO 3.3 GLASS
- These bottles comes with ground joint & Umbrella Stopper
- Printed in matt finish white colour enamel
- Clear scale Graduation for easy reading
- These bottles are mechanically strong and chemical resistant

Item Code	Capacity (ml)	O.D. x Height (mm)	N/S	Pack of	Price / Piece
272.276.01	30	36x78	14/23	10	414
272.276.02	60	45x90	14/23	10	442
272.276.02A	100*	54x98	14/23	10	489
272.276.03	125	56x115	19/26	10	434
272.276.04	250	70x142	19/26	10	483
272.276.05	500	86x180	24/29	10	490
272.276.06	1000	101x230	29/32	10	851
272.276.07	2000	136x260	29/32	10	1449

* DIN/ISO



Buy Now!



Bottle, Reagent Narrow Mouth, Amber

- Complies with **DIN/ISO 4796-2**
- Made from **ASTM 438** TYPE 1 BORO 3.3 GLASS
- These bottles comes with ground joint & Umbrella Stopper
- Printed in matt finish white colour enamel.
- Clear scale Graduation for easy reading
- These bottles are mechanically strong and chemical resistant
- The uniform Amber colour is highly durable and has high chemical resistance

Item Code	Capacity (ml)	O.D. x Height (mm)	N/S	Pack of	Price / Piece
273.276.01	30	36x78	14/23	10	576
273.276.02	60	44x90	14/23	10	623
273.276.02A	100*	54x98	14/23	10	685
273.276.03	125	56x115	19/26	10	667
273.276.04	250	70x142	19/26	10	840
273.276.05	500	86x180	24/29	10	980
273.276.06	1000	101x230	29/32	10	1208
273.276.07	2000	136x260	29/32	10	2279

* DIN/ISO



Buy Now!





Buy Now!

Bottle, Reagent, Narrow mouth

- Made from ASTM E-438, TYPE-1, CLASS-A, BORO 3.3 GLASS
- These bottles come with pressed flat stopper

Item Code	Capacity ml	Stopper No.	Pack of	Price / Piece
272.207.03A	125	19	1	427
272.207.04	250	19	1	475
272.207.05	500	24	1	500
272.207.06	1000	29	1	783
272.207.07	2000	29	1	1474



Buy Now!

Bottle, Tooled Neck, Plain

- Mechanically strong and chemical resistant
- Large volume capacity bottles designed for handling and storing culture media
- Large durable white colour enamelled area for marking

Item Code	Capacity ml	Dia (mm)	Height (mm)	Pack of	Price / Piece
282.202.02	250	70	140	10	472
282.202.06	500	86	180	10	510
282.202.07	1000	101	230	10	804
282.202.08	2000	136	285	10	1357
282.202.09	3000	158	295	1	6460
282.202.10	5000	183	330	1	8314
282.202.11	10000	235	430	1	14181
282.202.12	20000	299	530	1	23461

Bottle, Tooled Neck, Amber

- Recommended use with light-sensitive media and for long-term storage of substances
- Mechanically strong and chemical resistant
- Large durable white colour enamelled area for marking
- The uniform Amber colour is highly durable and has high chemical resistance
- Protects media from light radiation with a wave-length between 300 nm and 500nm

Item Code	Capacity ml	Dia (mm)	Height (mm)	Pack of	Price / Piece
282.279.04	250	70	140	10	860
282.279.06	500	86	180	10	908
282.279.07	1000	101	230	10	1318
282.279.08	2000	136	285	10	2285
282.279.09	3000	158	295	1	9800
282.279.10	5000	183	330	1	10950
282.279.11	10000	235	430	1	19350
282.279.12	20000	299	530	1	31080



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

WHITE
PRINTING

Durable

Bottle, Aspirator, with GL 45 Cap with tubulation

- Complies with DIN/ISO 4796-3
- Made From Heat Resistant Boro 3.3 Glass
- These bottles comes with autoclavable PP Screw caps & pouring rings
- These bottles have durable large white colour enamel marking area

Item Code	Capacity ml	Approx. O.D. x Height* (mm)	Thread Specification	Pack of	Price / Piece
280.205.05	250**	70 x 140	GL 45	1	500
280.205.06	500**	86 x 176	GL 45	1	580
280.205.07	1000	101 x 225	GL 45	1	1029
280.205.08	2000	136 x 260	GL 45	1	1634
280.205.10	5000	181 x 330	GL 45	1	9340
280.205.11	10000	235 x 410	GL 45	1	15908
280.205.12	20000	296 x 505	GL 45	1	28842

**Not covered in ISO / DIN standards.

*Height indicated is of Bottle only



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

121°C
SSSS

WHITE
PRINTING

Screw
Cap

Durable

Bottles

Bottle, Aspirator, with GL 45 Cap with socket


- Complies with **DIN/ISO 4796-3**
- Made From Heat Resistant
- These bottles comes with autoclavable PP Screw caps & pouring rings
- These bottles have duarable large white colour enamel marking area
- These bottles are suitable for storage of large media for long duration



Buy Now!

Item Code	Capacity ml	Approx. O.D. x Height* (mm)	Thread Specification	Outlet Ground Joint Size	Pack of	Price / Piece
280.202.07	1000	101 x 225	GL 45	24 / 29	1	1272
280.202.08	2000	136 x 260	GL 45	29 / 32	1	1818
280.202.11	5000	181 x 323	GL 45	29 / 32	1	10560
280.202.12	10000	235 x 405	GL 45	29 / 32	1	14940
280.202.13	20000	296 x 500	GL 45	29 / 32	1	25799

*Height indicated of Bottle only

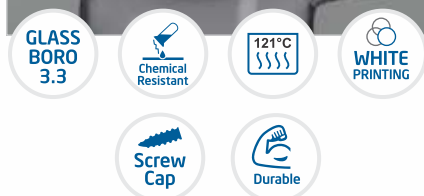

Bottle, Aspirator, with GL 45 Cap and Interchangeable Stopcock

- Complies with **DIN/ISO 4796-3**
- Made From Heat Resistant Boro 3.3 Glass
- Low Expansion



Buy Now!

Item Code	Capacity ml	Approx. O.D. x Height* (mm)	Thread Specification	Outlet Ground Joint Size	Pack of	Price / Piece
281.202.07	1000	101 x 225	GL 45	24 / 29	1	3531
281.202.08	2000	136 x 260	GL 45	29 / 32	1	4133
281.202.11	5000	181 X 330	GL 45	29 / 32	1	13896
281.202.12	10000	227 X 410	GL 45	29 / 32	1	19337
281.202.13	20000	288 X 505	GL 45	29 / 32	1	28505

*Height indicated of Bottle only



Bottle, Dropping

- Made From chemical Resistant glass & Heat Resistance Boro 3.3 Glass
- These bottles comes with interchangeable ground joint with dropper and rubber teat.

Item Code	Neck Size	Capacity ml	ODxHeight (mm)	Pack of	Price / Piece
279.202.01	270	30	36x78	10	384
279.202.02	360	60	45x90	10	516
279.202.03	380	120	56x116	10	546
279.202.04	510	250	70x128	10	732



Buy Now!



GLASS
BORO
3.3



WHITE
PRINTING

Bottle, Amber, Dropping

- Made From chemical Resistant amber glass & Heat Resistance Boro 3.3 Glass
- These bottles comes with interchangeable ground joint with dropper and rubber teat.

Item Code	Neck Size	Capacity ml	ODxHeight (mm)	Pack of	Price / Piece
279.229.01	270	30	36x78	10	612
279.229.02	360	60	45x90	10	844
279.229.03	380	120	56x116	10	894
279.229.04	510	250	70x128	10	1176



Buy Now!



GLASS
BORO
3.3



WHITE
PRINTING

Mac-Cartney Bottles

- Complete with Aluminium Cap Manufactured from Soda Glass

Item Code	Capacity ml	Pack of	Price / Piece
283.202.01	15	100	58
283.202.02	30	100	63



Buy Now!



Iron
Soda
Glass

Bottles



Bottle, Gas Washing

- Complies with DIN 12463
- Complete Interchangeable joints
- Made from Heat & Chemical resistance Boro 3.3 Glass



Buy Now!

Item Code	Capacity ml	Joint Size	Pack of	Price / Piece
286.202.04	100	29/32	2	1302
286.202.01B*	125	29/32	2	1291
286.202.05	250	29/32	2	1415
286.202.06	500	29/32	2	1730

*Non DIN



Head for Gas Bottles

- Made from ISO/DIN 3585, Class A, TYPE 1 , Boro 3.3 glass
- Complies DIN 12596 standard
- Made from Heat & Chemical resistance Boro 3.3 Glass



Buy Now!

Item Code	Capacity ml	Joint Size	Pack of	Price / Piece
285.202.04	100	29/32	1	788
285.202.01B*	125	29/32	1	788
285.202.05	250	29/32	1	834
285.202.06	500	29/32	1	956

*Non DIN



Complete Gas Washing bottle with head

- Complies with DIN 12596, 12463
- Complete Interchangeable joints



Buy Now!

Item Code	Capacity ml	Joint Size	Pack of	Price / Piece
285.406.01*	125	29/32	1	1488
285.406.02	250	29/32	1	1574
285.406.03	500	29/32	1	1824

*Non standards

Bottle, Head, Sintered wash

- Complies DIN 12596

Item Code	Capacity ml	Joint Size	Pack of	Price / Piece
287.202.06	100	29/32	1	773
287.202.06A*	125	29/32	1	773
287.202.07	250	29/32	1	803
287.202.08	500	29/32	1	918

* Non DIN



Buy Now!



Bottle, Weighing

- made from ASTM-438, TYPE-1, Boro 3.3 glass
- These bottles are chemically resistant & mechanically strong

Item Code	O.D. x Ht. (mm)	Form	Capacity ml	Pack of	Price / Piece
264.202.01	40x30	Squat Form	15	10	575
264.202.02	50x25	Squat Form	20	10	600
264.202.03	50x35	Squat Form	35	10	600
264.202.04	50x50	Squat Form	50	10	827
264.202.05	60x30	Squat Form	30	10	959
264.202.05A	60x40	Squat Form	40	10	975
264.202.06	20x40	Tall Form	5	10	327
264.202.07	25x50	Tall Form	15	10	347
264.202.08	30x60	Tall Form	25	10	405
264.202.09	40x80	Tall Form	60	10	592



Buy Now!

Item Code	I.D. x Ht. (ml)	Neck Size	Form	Capacity ml	Pack of	Price / Piece
264.402.03	50x30	50/12	Squat Form	35	10	751
264.402.05	60x30	60/12	Squat Form	50	10	1113
264.402.07	70x33	71/15	Squat Form	82	10	1725
264.407.01	15x50	14/10	Tall Form	7	10	250
264.407.02	25x40	24/12	Tall Form	12	10	334
264.407.02A	25x50	24/12	Tall Form	16	10	382
264.407.03	30x60	29/12	Tall Form	30	10	473
264.407.05	40x50	40/12	Tall Form	45	10	590
264.407.05A	40x80	40/12	Tall Form	70	10	723
264.407.07	50x60	50/12	Tall Form	85	10	863



Buy Now!



Bottles



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Bottle, Wash

- Complete With Interchangeable Head
- These bottle are highly Heat Resistant

Item Code	Capacity ml	Approx Total Height mm	Size of I/C Stopper	Pack Size	Price / Piece
285.502.02	250	225	24/29	1	936
285.502.03	500	280	24/29	1	1182
285.502.04	1000	315	29/32	1	1450



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Head for Wash Bottles

Item Code	Capacity ml	Size of I/C Stopper	Pack Size	Price / Piece
287.502.02	250	24/29	1	620
287.502.03	500	24/29	1	660
287.502.04	1000	29/32	1	690



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Bottle, Only For Wash Bottle

- Complies with ISO 3585
- Made From Heat Resistant, Boro 3.3 Glass

Item Code	Capacity ml	Approx Total Height mm	Size of I/C Stopper	Pack Size	Price / Piece
289.202.02	250	135	24/29	1	575
289.202.03	500	175	24/29	1	910
289.202.04	1000	205	29/32	1	1220

Pycnometers to Gay - Lussac, Calibrated at 27°C, Class-A

- Complies with DIN/ISO 3507
- With Individual Work Certificate
- With Teflon stopper

Item Code Class A	Capacity (ml)	Tolerance (± ml)	Pack of	Price / Piece
268.523.01	10	0.3	1	1242
268.523.02	25	0.8	1	1447
268.523.03	50	1	1	1543
268.523.04	100	3	1	1708



Buy Now!



Pycnometers to Gay - Lussac, Calibrated at 27°C, with Teflon stopper, Class B

- Manufactured from ASTM 438 TYPE 1 Boro 3.3 GLASS, DIN ISO 3507, without Certificate

Item Code Class B	Capacity (ml)	Tolerance (± ml)	Pack of	Price / Piece
269.502.01	10	0.3	2	578
269.502.02	25	0.8	2	634
269.502.03	50	1	2	689
269.502.04	100	3	2	772



Buy Now!



Bottles

BOD Bottles for incubating diluted samples of clean water, waster water, effluent water and polluted water during the 5 day biochemical oxygen demand (BOD) test. These BOD bottles feature a flared mouth to form a water seal to prevent the ingress of air during incubation. The interchangeable stoppers have a tapered bottom that also prevents air entrapment.

The stopper joint on BOD bottles is compatible with the probes of leading BOD and DO meters. Bottles have large, permanent marking squares.

Featuring the best quality of glass on the market, BOD bottles are manufactured from high-quality Borosilicate tubing; this type of glass makes them much less susceptible to etching when compared to traditional BOD bottles.

Bottles meet ASTM E-438 Type 1, Class A Borosilicate Glass specifications. These bottles come in numbered and un numbered version and also in penny head or robotic stopper.



Buy Now!

Item Code	Capacity (ml)	Number Sequence	Stopper (Glass Type)	Pack of	Price / Piece
284.456.01	60	Unnumbered	Pennyhead	1	552
284.451.01A	60	1-36	Pennyhead	36	552
284.451.01B	60	37-72	Pennyhead	36	552
284.451.01C	60	73-108	Pennyhead	36	552
284.456.03	125	Unnumbered	Pennyhead	1	684
284.456.02	300	Unnumbered	Pennyhead	1	786
284.456.02R	Bar-Coded, 300	1-24	Pennyhead	24	667
284.456.02A	Bar-Coded, 300	25-48	Pennyhead	24	828
284.456.02B	Bar-Coded, 300	49-72	Pennyhead	24	828
284.456.02C	Bar-Coded, 300	73-96	Pennyhead	24	828
284.456.02D	Bar-Coded, 300	97-120	Pennyhead	24	828
284.456.02E	Bar-Coded, 300	121-144	Pennyhead	24	828
284.456.02F	Bar-Coded, 300	145-168	Pennyhead	24	828
284.456.02G	Bar-Coded, 300	169-192	Pennyhead	24	828
284.456.02H	Bar-Coded, 300	193-216	Pennyhead	24	828
284.456.02I	Bar-Coded, 300	217-240	Pennyhead	24	828
284.456.02J	Bar-Coded, 300	241-264	Pennyhead	24	828
284.456.02K	Bar-Coded, 300	265-288	Pennyhead	24	828
284.456.02L	Bar-Coded, 300	289-312	Pennyhead	24	828
284.456.02M	Bar-Coded, 300	313-336	Pennyhead	24	828
284.456.02N	Bar-Coded, 300	337-360	Pennyhead	24	828
284.456.02O	Bar-Coded, 300	361-384	Pennyhead	24	828
284.456.02P	Bar-Coded, 300	385-408	Pennyhead	24	828
284.456.02Q	Bar-Coded, 300	409-432	Pennyhead	24	828



Buy Now!

Item Code	Capacity (ml)	Number Sequence	Stopper (Glass Type)	Pack of	Price / Piece
284.453.01	60	Unnumbered	Robotic	1	437
284.453.01A	60	1-36	Robotic	36	552
284.453.01B	60	37-72	Robotic	36	552
284.453.01C	60	73-108	Robotic	36	552
284.455.02	300	Unnumbered	Robotic	1	667
284.455.02A	Bar-Coded, 300	1-24	Robotic	24	828
284.455.02B	Bar-Coded, 300	25-48	Robotic	24	828
284.455.02C	Bar-Coded, 300	49-72	Robotic	24	828
284.455.02D	Bar-Coded, 300	73-96	Robotic	24	828
284.455.02E	Bar-Coded, 300	97-120	Robotic	24	828
284.455.02F	Bar-Coded, 300	121-144	Robotic	24	828
284.455.02G	Bar-Coded, 300	145-168	Robotic	24	828
284.455.02H	Bar-Coded, 300	169-192	Robotic	24	828
284.455.02I	Bar-Coded, 300	193-216	Robotic	24	828
284.455.02J	Bar-Coded, 300	217-240	Robotic	24	828
284.455.02K	Bar-Coded, 300	241-264	Robotic	24	828
284.455.02L	Bar-Coded, 300	265-288	Robotic	24	828
284.455.02M	Bar-Coded, 300	289-312	Robotic	24	828
284.455.02N	Bar-Coded, 300	313-336	Robotic	24	828
284.455.02O	Bar-Coded, 300	337-360	Robotic	24	828
284.455.02P	Bar-Coded, 300	361-384	Robotic	24	828
284.455.02Q	Bar-Coded, 300	385-408	Robotic	24	828
284.455.02R	Bar-Coded, 300	409-432	Robotic	24	828

Bottle, Culture, (Roux) Off-Set Neck

- These bottles are ideal for growing various type of cultures
- These bottles withstand multiple autoclave & sterilization
- The neck of these bottles is tool finished for greater strength

Item Code	Capacity (ml)	Approx. BxWxH (mm)	Approx. Neck I.D.(mm)	Pack of	Price / Piece
288.202.07	1000	126 x 56 x 265	26	2	2239



Buy Now!



GLASS
BORO
3.3

Chemical
Resistant

WHITE
PRINTING

Bottle, Brush

Item Code	Type	Material	Pack of	Price /Pack
593.303.01	Bottles Brush	Nylon	50	4650



Buy Now!



Nylon

Bottles



Buy Now!

Bottle, Wash Bottles (New Type)

- Made from Low Density Polyethylene and are therefore translucent & unbreakable
- The distinguishing feature that these bottles contain is the built in delivery tube making it a one piece Wash Bottle
- These Bottles are graduated on the outer surface to give an approximate idea about the volume of solution filled or dispensed

Item Code	Capacity (ml)	Pack of	Price /Pack
110.303.03	125	12	635
110.303.01	250	12	979
110.303.02	500	12	1141



“SAFE - HANDLE”

Safety Jar for Glass Bottles

Glass bottles are clean, dependable containers for liquid but they can present a serious safety hazard when broken. By containing liquid spills and broken glass, the “Safe-Handle” protects people and property from glass shards and exposure to flammable or hazardous liquid

Designed For Safety:

- Minimizes spills and prevents breakage
- Meets secondary containment requirement
- Easy mechanism
- Environmentally friendly
- No effect on product quality
- Suitable for 2.5 ltr. glass bottle
- Prevent breakage and minimizes spills
- Meets secondary containment requirements
- Easy-to-use mechanism
- Is Environmentally responsible
- Does not contaminate liquids



6 Easy steps to greater lab safety.



Step 1.
Disengage Bottom & top of Safe-Handle.



Step 4.
When the bottle is empty, place the safe-handle. While holding the bottom handle with one hand, turn the top handle with the other hand in a clock wise direction until the lugs click into place.



Step 2.
Carefully place the bottle in the bottom portion of the Safe-Handle.



Step 5.
Lock the top of the container to the bottom by pressing the handle lock mechanism until it snaps together. Ensure that the locking mechanism is engaged before carrying or dispensing liquid.



Step 3.
Lower the Safe-Handle top over the neck of the bottle. Line up the indicator arrows to ensure assembly.




Step 6.
When the bottle is empty, place the safe-handle on a flat surface to disengage. Hold the bottom handle with one hand. Using the other hand rotate the top in a counter clockwise direction until the lugs are disengaged. Remove the top from the bottom.

Item Code	Description	Pack of	Price /Piece
215.202.01	Safety Jar for European 2.5 Ltr Glass Bottle	1	2707



Buy Now!

Burette

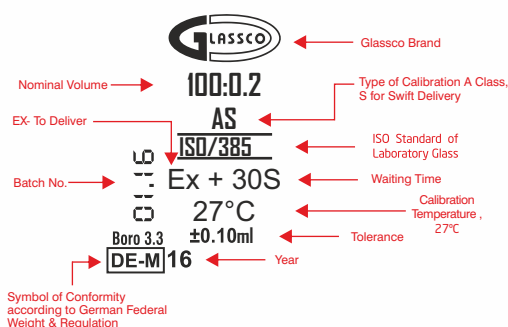

Glassco Burettes are manufactured from **ASTM E-438 TYPE 1 CLASS A BORO 3.3** heat resistant glass which meet **DIN ISO 385** and **USP standards**. Each and every piece is calibrated to deliver **(TD, EX) 27°C**.

All 'A' CLASS burettes are manufactured from precision bore tubing for accuracy.

The Burettes are calibrated on computer controlled machines to give the most accurate results and then are rechecked on the quality control centre.

The Burettes made in 'A' class come with individual work certificate.

All 'A' Class burettes are printed in blue colour.

The individual work certificate are packed with each piece, however it can also be downloaded through our website www.glasscolabs.com

The Burettes come with 3 different kind of stopcocks **Glass Stopcock, PTFE Needle Valve Stopcock & PTFE Key Stopcock**.

Burette, with glass stopcock Class A

- Complies with **DIN ISO 385/IS 1997: 2008**
- Comes with individual works certificate in clear glass
- Printed in blue colour

Item Code Class A	Cap. (ml)	Division	Tolerance (±ml)	Pack of	Price /Piece
111.523.01	10	0.05	0.03	1	2514
111.523.02	25	0.1	0.05	1	2547
111.523.03	50	0.1	0.05	1	2892
111.523.04	100	0.2	0.1	1	4140

Burette, with glass stopcock, Class A

- Complies with **DIN ISO 385/IS 1997: 2008**
- NABL** certified
- Comes with individual works certificate in Clear glass
- Printed in blue colour



Item Code Class A NABL	Cap. (ml)	Division	Tolerance (±ml)	Pack of	Price /Piece
111.505.01	10	0.05	0.03	1	4629
111.505.02	25	0.1	0.05	1	4738
111.505.03	50	0.1	0.05	1	5422
111.505.04	100	0.2	0.1	1	7722

Burette, with glass stopcock, Class B

- Complies with **DIN ISO 385/IS 1997: 2008**
- In clear glass
- Printed in blue colour

Item Code Class B	Cap. (ml)	Division	Tolerance (±ml)	Pack of	Price /Piece
110.522.01	10	0.05	0.05	1	845
110.522.02	25	0.1	0.1	1	828
110.522.03	50	0.1	0.1	1	891
110.522.04	100	0.2	0.20	1	1242



Burette, with Boroflow stopcock, Class A

- Complies with **DIN ISO 385/IS 1997 :2008**
- Comes with Individual Work Certificate in clear Glass
- Printed in blue colour

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
113.523.01	10	0.05	0.03	1	2271
113.523.02	25	0.1	0.05	1	2340
113.523.03	50	0.1	0.05	1	2680
113.523.04	100	0.2	0.1	1	3755



Buy Now!

Burette, with Boroflow stopcock, Class A

- Complies with **DIN ISO 385**
- **NABL** Certified
- Comes with individual works Certificate
- Printed in blue colour



Item Code Class NABL	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
113.505.01	10	0.05	0.03	1	4474
113.505.02	25	0.1	0.05	1	4652
113.505.03	50	0.1	0.05	1	5284
113.505.04	100	0.2	0.1	1	7308



Buy Now!

Burette, with Boroflow stopcock, Class B

- Complies with **DIN ISO 385**
- Printed in blue colour

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
112.522.01	10	0.05	0.05	1	742
112.522.02	25	0.1	0.1	1	696
112.522.03	50	0.1	0.1	1	782
112.522.04	100	0.2	0.2	1	1167



Buy Now!

Burette, Amber with Boroflow stopcock, Class A

- Complies with **DIN ISO 385/IS 1997 :2008**
- Comes with Individual Work Certificate in Amber Glass

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
113.524.02A	25	0.1	0.05	1	3830
113.524.03A	50	0.1	0.05	1	4324



Buy Now!


Burette, Amber with Boroflow stopcock, Class B

- Complies with **DIN ISO 385** and **USP** standards

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
112.522.02A	25	0.1	0.1	1	1121
112.522.03A	50	0.1	0.1	1	1233



Buy Now!

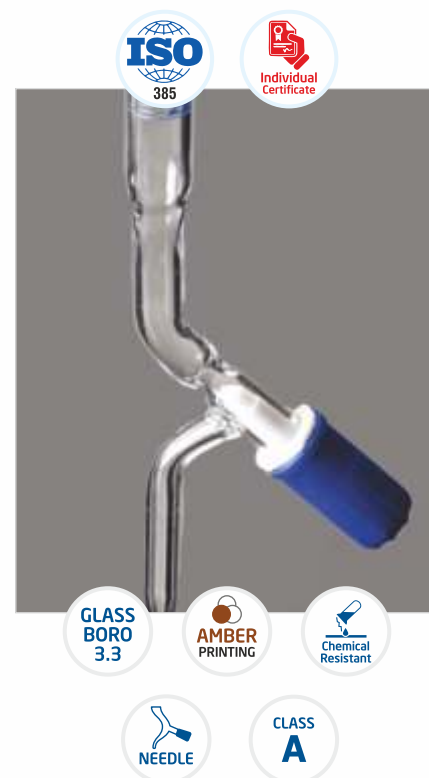



Buy Now!

Burette, With PTFE key stopcock, Class A

- Complies with DIN ISO 385/IS 1997 : 2008
- Comes with Individual Work Certificate clear Glass
- Printed in blue colour

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
115.523.01	10	0.05	0.03	1	2513
115.523.02	25	0.1	0.05	1	2570
115.523.03	50	0.1	0.05	1	2783
115.523.04	100	0.2	0.1	1	3812

Burette, With PTFE key stopcock Class A

- Complies with DIN ISO 385/IS 1997 : 2008
- NABL Certified
- Comes with Individual Work Certificate in clear Glass
- Printed in blue colour



Buy Now!

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
115.505.01	10	0.05	0.03	1	4617
115.505.02	25	0.1	0.05	1	4928
115.505.03	50	0.1	0.05	1	5514
115.505.04	100	0.2	0.1	1	7107

Burette, With PTFE key stopcock Class B

- Complies with DIN ISO 385/IS 1997 : 2008
- Comes with Individual Work Certificate clear Glass
- Printed in blue colour



Buy Now!

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
114.522.01	10	0.05	0.05	1	1041
114.522.02	25	0.1	0.10	1	1047
114.522.03	50	0.1	0.10	1	1087



Buy Now!

ASTM-Burettes

Burette, with PTFE Key Stopcock, Class A

- Calibrated at 20°C
- Complies with ASTM E 287 Specifications.
- Individual work certificate

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Pack of	Price / Piece
115.451.01	10	0.05	0.02	1	2555
115.451.02	25	0.1	0.03	1	2657
115.451.03	50	0.1	0.05	1	2921
115.451.04	100	0.2	0.1	1	3910

Burette, Fisher Clamp

- Moulded in Polypropylene making it completely corrosion proof
- The spring loaded jack in the middle provides a vice like grip to the Burette and prevents it from slipping
- Two tapered wedges are provided to ensure firm grip on rods having dia 1/2" or 3/8"
- Made from Polypropylene

Item Code	Type	Pack of	Price / Pack
112.303.01	Fisher Clamp - Single	12	1954
112.303.02	Fisher Clamp - Double	6	1386



Buy Now!



Burette, Clamp

- Made of Aluminium, die casted, blue painted, black rubber sleeves for firm gripping of burettes.
- With adjustable clamps to hold upto 30 mm, spring type, thumb screw key for retort rods upto 16 mm dia.

Item Code	Type	Pack of	Price / Pack
394.303.01	Single	12	9240
394.303.02	Double	6	4092



Buy Now!





MS



Buy Now!

Burette, Clamp, Mild Steel

- Mild Steel
- Chrome Coated,
- Fisher Type with Boss Head, Single

Item Code	Type	Max. Temp.	Pack of	Price / Pack
318.303.01	PVC Sleeve	80°C	12	4128
318.303.02	Silicon Sleeve	280°C	12	4080



MS



Buy Now!

Burette, Clamp, Mild Steel

- Mild Steel
- Black Powder Coated
- Fisher Type with Boss Head, Single

Item Code	Type	Max. Temp.	Pack of	Price / Pack
319.303.01	PVC Sleeve	80°C	12	3768
319.303.02	Silicon Sleeve	280°C	12	3684

Burette, Clamp, Mild Steel

- Mild Steel
- Chrome Coated,
- Fisher Type with Boss Head, Double

Item Code	Type	Max. Temp.	Pack of	Price / Pack
320.303.01	PVC Sleeve	80°C	6	3054
320.303.02	Silicon Sleeve	280°C	6	3030



Buy Now!



MS

**Burette, Clamp, Mild Steel**

- Mild Steel
- Black Powder Coated,
- Fisher Type with Boss Head, Double

Item Code	Type	Max. Temp.	Pack of	Price / Pack
321.303.01	PVC Sleeve	80°C	6	2940
321.303.02	Silicon Sleeve	280°C	6	2922



Buy Now!



MS



Burette



Burette, Automatic Zero with Boroflow Stopcock,

- Complies with **DIN ISO 385 standard Class-A**
- Comes with Individual Works Certificate
- With **detachable stopcock** prevents breakage during usage

Item Code Class A	Cap. (ml)	Division	Tolerance ($\pm$ ml)	Bottle Cap. (ml)	Pack of	Price / Piece
120.523.01	10	0.05	0.03	500	1	9384
120.523.02	25	0.1	0.05	2000	1	9060
120.523.03	50	0.1	0.05	2000	1	10056
120.523.04	100	0.2	0.10	2000	1	11436

Burette, Automatic Zero with Boroflow Stopcock,

- Complies with **DIN ISO 385 standard Class-B**

Item Code Class B	Cap. (ml)	Division	Tolerance ($\pm$ ml)	Bottle Cap. (ml)	Pack of	Price / Piece
118.522.01	10	0.05	0.05	500	1	6132
118.522.02	25	0.1	0.1	2000	1	5976
118.522.03	50	0.1	0.1	2000	1	6546
118.522.04	100	0.2	0.2	2000	1	7512



Burette, Automatic Zero, Amber, With Boroflow Stopcock,

- Complies with **DIN ISO 385 standard Class-A**
- Comes with Individual Works Certificate
- With detachable stopcock stopper

Item Code Class A	Cap. (ml)	Division	Tolerance ($\pm$ ml)	Bottle Cap. (ml)	Pack of	Price / Piece
120.523.01A	10	0.05	0.03	500	1	20082
120.523.02A	25	0.1	0.05	2000	1	21152
120.523.03A	50	0.1	0.05	2000	1	23175
120.523.04A	100	0.2	0.10	2000	1	24013

Burette, Automatic Zero, Amber, With Boroflow Stopcock,

- Complies with **DIN ISO 385 standard Class-B**.

Item Code Class B	Cap. (ml)	Division	Tolerance ($\pm$ ml)	Bottle Cap. (ml)	Pack of	Price / Piece
118.522.01A	10	0.05	0.05	500	1	13806
118.522.02A	25	0.1	0.1	2000	1	14088
118.522.03A	50	0.1	0.1	2000	1	14460
118.522.04A	100	0.2	0.2	2000	1	14832

Burette, Automatic, Zero with Glass stopcock

- Complies with **DIN ISO 385 standard Class-A**
- Comes with Individual Works Certificate
- With Detachable stopcock to prevents breakage during usage

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
121.523.01	10	0.05	0.03	500	1	9716
121.523.02	25	0.1	0.05	2000	1	9490
121.523.03	50	0.1	0.05	2000	1	10621
121.523.04	100	0.2	0.1	2000	1	12079



Buy Now!



DETACHABLE STOPCOCK



Buy Now!

Burette, Automatic Zero with Glass stopcock

- Complies with **DIN ISO 385 standard Class-B**
- With Detachable stopcock to prevents breakage during usage

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
121.522.01	10	0.05	0.05	500	1	6399
121.522.02	25	0.1	0.1	2000	1	6301
121.522.03	50	0.1	0.1	2000	1	6881
121.522.04	100	0.2	0.2	2000	1	7839



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

GLASS

CLASS
A

Burette, Automatic, Amber, Zero with Glass stopcock

- Complies with **DIN ISO 385 standard Class-A**
- Comes with Individual Works Certificate
- With Detachable stopcock to prevents breakage during usage

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
121.523.01A	10	0.05	0.03	500	1	20159
121.523.02A	25	0.1	0.05	2000	1	21361
121.523.03A	50	0.1	0.05	2000	1	23735
121.523.04A	100	0.2	0.10	2000	1	24288



Buy Now!



DETACHABLE STOPCOCK



Buy Now!

Burette, Automatic, Amber, Zero with Glass Stopcock

- Complies with **DIN ISO 385 standard Class-B**
- With Detachable stopcock to prevents breakage during usage

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
121.522.01A	10	0.05	0.05	500	1	14066
121.522.02A	25	0.1	0.1	2000	1	14268
121.522.03A	50	0.1	0.1	2000	1	14566
121.522.04A	100	0.2	0.2	2000	1	15262



Buy Now!



GLASS
BORO
3.3


WHITE
PRINTING

Chemical
Resistant

GLASS

CLASS
A

Burette

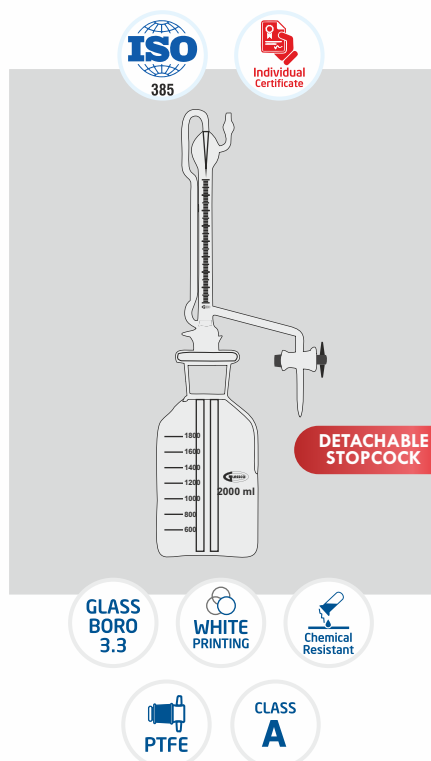

Buy Now!

Burette, Automatic, Zero with PTFE stopcock

- Complies with **DIN ISO 385 standard Class-A**
- With Detachable stopcock to prevents breakage during usage

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
122.523.01	10	0.05	0.03	500	1	10341
122.523.02	25	0.1	0.05	2000	1	10026
122.523.03	50	0.1	0.05	2000	1	11127
122.523.04	100	0.2	0.1	2000	1	12828


Burette, Automatic, Zero with PTFE stopcock

- Complies with **DIN ISO 385 standard Class-B**
- With Detachable stopcock to prevents breakage during usage

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
122.523.01B	10	0.05	0.05	500	1	6777
122.523.02B	25	0.1	0.1	2000	1	6628
122.523.03B	50	0.1	0.1	2000	1	7051
122.523.04B	100	0.2	0.2	2000	1	8199



Buy Now!

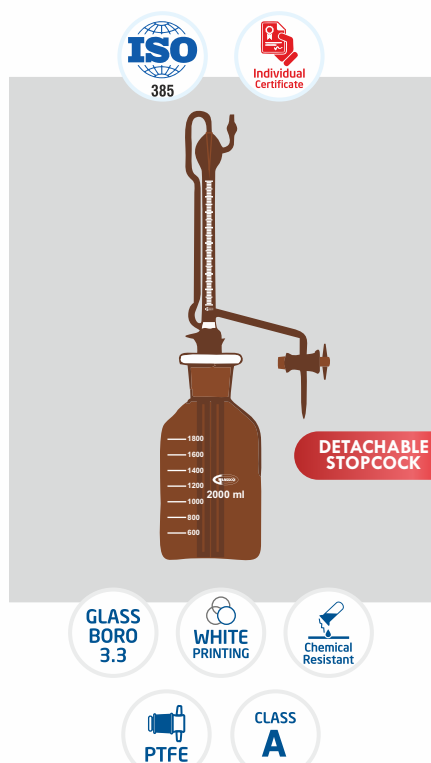

Buy Now!

Burette, Automatic, Amber, Zero with PTFE stopcock

- Complies with **DIN ISO 385 standard Class-A**
- With Detachable stopcock to prevents breakage during usage

Item Code Class A	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
122.523.01A	10	0.05	0.03	500	1	21111
122.523.02A	25	0.1	0.05	2000	1	22539
122.523.03A	50	0.1	0.05	2000	1	24681
122.523.04A	100	0.2	0.1	2000	1	25823

Burette, Automatic, Amber, Zero with PTFE Stopcock,

- Complies with **DIN ISO 385 standard Class-B**
- With Detachable stopcock to prevents breakage during usage

Item Code Class B	Cap. (ml)	Division	Tolerance (± ml)	Bottle Cap. (ml)	Pack of	Price / Piece
122.523.01AB	10	0.05	0.05	500	1	14488
122.523.02AB	25	0.1	0.1	2000	1	13745
122.523.03AB	50	0.1	0.1	2000	1	13965
122.523.04AB	100	0.2	0.2	2000	1	14530



Buy Now!

Burette, Chloroform Bellow with Cotton Net :

For use with automatic burettes

Item Code	Pack of	Price / Pack
412.303.01	4	1276



Buy Now!

**Burette, Atomizer Bulb :**

Typically, an atomizer is used to dispense something in small, controlled amounts

Item Code	Pack of	Price / Pack
413.303.01	4	468



Buy Now!

**Burette, Brush**

Item Code	Type	Material	Pack of	Price / Pack
593.303.07	Burette Brush	Nylon	50	7500



Buy Now!



Nylon



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Column, Chromatography, Plain

- Simple and economical column - ideal for educational use
- With chemically resistant glass sintered disc - porosity 1
- Made from Boro 3.3 Glass as per ISO 3585

Item Code	Cap. (ml)	Body O.D. (mm)	Length excluding stem (mm)	Stem O.D. (mm)	Pack of	Price / Piece
218.212.03	30	14	355	8	5	450



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

NEEDLE

ONE
SOCKET



Buy Now!

Column, Chromatography with PTFE Needle Valve stopcock

- With PTFE Rotaflow stopcock for fine control of eluent flow
- Chemically resistant glass sintered disc - porosity 0
- Ground glass socket accepts reservoirs
- Manufactured from Boro 3.3 Glass

Item Code	I.D. (mm)	Effective Length (mm)	Socket Size	Pack of	Price / Piece
220.202.01	10	100	14/23	1	959
220.202.02	10	200	14/23	1	959
220.202.03	10	300	14/23	1	959
220.202.04	10	400	14/23	1	1005
220.202.05	20	200	19/26	1	1091
220.202.06	20	300	19/26	1	1091
220.202.07	20	400	19/26	1	1137
220.202.08	20	500	19/26	1	1190
220.202.09	26	400	24/29	1	1203
220.202.10	26	500	24/29	1	1256
220.202.11	30	400	29/32	1	1336
220.202.12	30	500	29/32	1	1389
220.202.13	30	400	34/35	1	1613
220.202.14	30	500	34/35	1	1666
220.202.15	40	400	40/38	1	1719
220.202.16	40	500	40/38	1	1812


Column, Chromatographic columns with frit and socket

- Made of Boro 3.3 glass
- Chromatographic columns
- With sintered/ frit/ disc (porosity: 0),
- With PTFE stopcock 2 mm bore

Item Code	Effective Length(mm)	I.D. (mm)	Cap. (ml)	Stopcock Description	N/S	Pack of	Price / Piece
221.212.01	100	10	8	PTFE	14/23	1	1799
221.212.02	200	10	15	PTFE	14/23	1	1799
221.212.03	200	15	35	PTFE	14/23	1	1812
221.212.04	300	10	23	PTFE	14/23	1	1799
221.212.05	400	20	125	PTFE	29/32	1	2195
221.212.07	600	30	430	PTFE	29/32	1	2169



Buy Now!

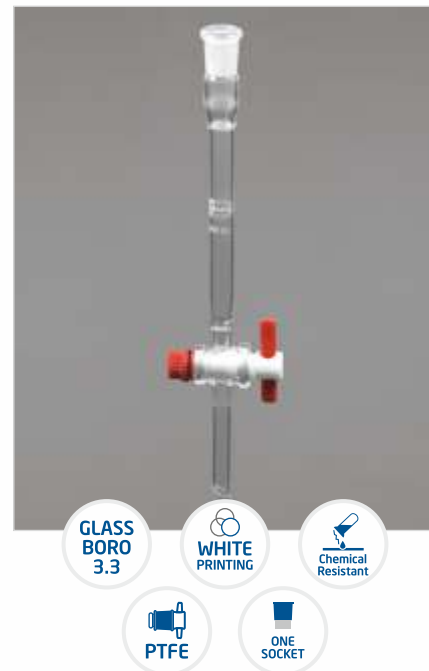


Column, Chromatographic columns with frit,

- With socket and cone
- With PTFE stopcock
- With sintered frit (porosity: 0), with suction tube (thread GL 14)
- Made of Boro 3.3 Glass

Item Code	Effective Length(mm)	I.D. (mm)	Capacity (ml)	Socket & Cone (NS)	Pack of	Price / Piece
212.202.02	200	15	35	14/23	1	1997
212.202.04	400	20	120	14/23	1	2076
212.202.04D	400	30	280	29/32	1	2500
212.202.06D	600	30	430	29/32	1	2632



Buy Now!

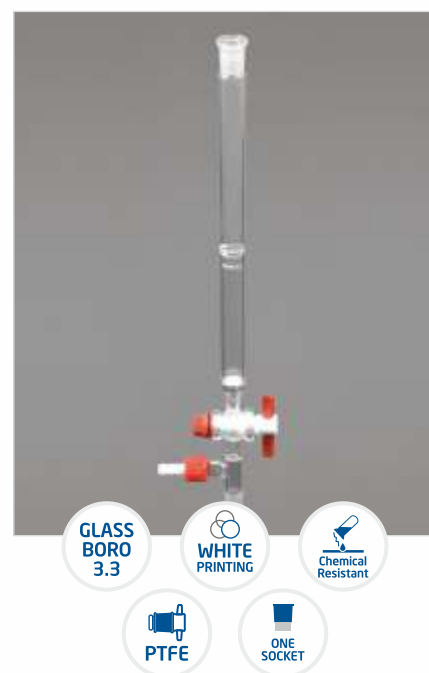



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

NEEDLE

ONE
SOCKET



Buy Now!

Column, Chromatographic columns with frit

- Made of Boro 3.3 Glass
- with socket and cone
- with needle-valve stopcock, Boro (0-3mm)
- with sintered frit (porosity: 0), with suction tube (thread GL 14)

Item Code	Effective Length(mm)	I.D. (mm)	Capacity (ml)	Socket & Cone (NS)	Pack of	Price / Piece
213.202.02	200	15	35	14/23	1	1164
213.202.04	400	20	120	14/23	1	1223
213.202.04D	400	30	280	29/32	1	1607
213.202.06D	600	30	430	29/32	1	1799



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

PTFE

ONE
SOCKET



Buy Now!

Column, Chromatography

- Heavy wall Design
- General purpose column has a PTFE stopcock and a top outer joint for flash chromatography

Item Code	Socket	Size (mm) OD x Effective Length	Bore (mm)	Pack of	Price / Piece
221.475.01	24/40	17x305	2	1	1931
221.475.02	24/40	32x457	2	1	2182

Column, Chromatography Column with Joint Fritted Disc and PTFE Stopcock

- General purpose column has a PTFE stopcock, a top outer joint and with a coarse porosity fritted disc to support column packing

Item Code	Socket	Size (mm) OD x Effective Length	Bore (mm)	Pack of	Price / Piece
221.477.03	24/40	40x457	2	1	3835



Buy Now!



Column, Chromatography with PTFE Stopcock and Fritted Disc

- With reinforced beaded top, coarse porosity fritted disc to support column packing.
- All columns are heavy wall designed to increase safety.

Item Code	Size (mm) OD x Effective Length	Bore (mm)	Pack of	Price / Piece
221.204.06	40x457	2	1	2341



Buy Now!



Columns



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

ONE
SOCKET

ONE
CONE



Buy Now!

Column, Chromatography with ground cone

- With glass sintered disc - porosity 0
- Upper socket can be connected to a stopcock adapter to control eluent flow
- Manufactured from borosilicate glass

Item Code	I.D. (mm)	Effective Length(mm)	Overall Length (mm)	Socket Size	Cone Size	Pack of	Price / Piece
223.202.01	18	200	310	24/29	19/26	1	1091
223.202.02	18	300	415	24/29	19/26	1	1091
223.202.03	18	400	515	24/29	19/26	1	1137



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

ONE
SOCKET

ONE
CONE



Buy Now!

Column, acc. to Vigreux With socket and cone

- Made of Boro 3.3 glass
- Without glass jacket, horizontal and lateral indentations

Item Code	Effective Length(mm)	Cone and Socket (NS)	Pack of	Price / Piece
197.204.01	100	10/19	1	476
197.204.02	200	10/19	1	555
197.204.05A	300	14/23	1	741
197.204.05C	300	24/29	1	1018
197.204.05D	300	29/32	1	1164
197.204.03	360	29/32	1	1243
197.204.06	600	24/29	1	1415
197.204.06A	600	29/32	1	1527

ASTM Sizes



Buy Now!

Item Code	Effective Length(mm)	Socket and Cone (NS)	Pack of	Price / Piece
197.470.00	120	14/20	1	516
197.470.09	300	24/40	1	1164



Condenser, Air

- Manufactured from ASTM E-438, Type-1, Class, A Boro 3.3 Glass
- These are used for the condensation of material with boiling point above 150°C

Item Code	Socket Size	Cone Size	Effective Length(mm)	Pack of	Price / Piece
181.202.01	14/23	14/23	200	1	414
181.202.02	19/26	19/26	200	1	512
181.202.03	24/29	24/29	250	1	742
181.202.04	19/26	19/26	400	1	863
181.202.05	24/29	24/29	500	1	1052
181.202.06	34/35	34/35	500	1	2099
181.202.07	19/26	19/26	600	1	920
181.202.08	24/29	24/29	750	1	1432
181.202.09	-	19/26	750	1	989
181.202.10	-	24/29	750	1	1012
181.202.11	-	19/26	1000	1	1616
181.202.12	-	24/29	1000	1	1662



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

PS : All Condensers can be ordered with ASTM Joint Sizes on request.

Condensers



Buy Now!

Condenser, Leibig

- Compliance with DIN 12576
- Drip Tip
- Interchangeable Inner & Outer Joints.
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass.

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
182.181.01	14/23	160	14/23	Screw Thread	1	667
182.181.01A	19/26	160	19/26	Screw Thread	1	667
182.181.02	19/26	250	19/26	Screw Thread	1	713
182.181.03*	24/29	250	24/29	Screw Thread	1	713
182.181.03A	29/32	250	29/32	Screw Thread	1	713
182.181.04*	19/26	300	19/26	Screw Thread	1	811
182.181.05*	24/29	300	24/29	Screw Thread	1	811
182.181.06*	29/32	300	29/32	Screw Thread	1	955
182.181.10*	24/29	400	24/29	Screw Thread	1	1052
182.181.11	29/32	400	29/32	Screw Thread	1	1052

* Non DIN

ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
182.481.01	14/20	120	14/20	Screw Thread	1	684
182.481.02	19/22	180	19/22	Screw Thread	1	696
182.481.03	24/40	200	24/40	Screw Thread	1	725
182.481.05	24/40	300	24/40	Screw Thread	1	834



Buy Now!



Buy Now!

Condenser, Leibig

- Compliance with DIN 12576
- Drip Tip
- Interchangeable Inner & Outer Joints.
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass.

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
182.202.01	14/23	160	14/23	Glass	1	604
182.202.01A	19/26	160	19/26	Glass	1	604
182.202.02	19/26	200	19/26	Glass	1	669
182.202.02	19/26	250	19/26	Glass	1	650
182.202.03*	24/29	250	24/29	Glass	1	650
182.202.03A	29/32	250	29/32	Glass	1	650
182.202.04*	19/26	300	19/26	Glass	1	753
182.202.05*	24/29	300	24/29	Glass	1	719
182.202.06*	29/32	300	29/32	Glass	1	897
182.202.10*	24/29	400	24/29	Glass	1	799
182.202.11	29/32	400	29/32	Glass	1	1001

* Non DIN

ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
182.402.01	14/20	120	14/20	Glass	1	633
182.402.02	19/22	180	19/22	Glass	1	644
182.402.04	24/40	200	24/40	Glass	1	684
182.402.05	24/40	300	24/40	Glass	1	684



Buy Now!

Condenser, Liebig

- Available with Sealed Inner Tube
- Made From Heat Resistant
- Low Expansion 3.3 Borosilicate Glass
- Made from **ASTM E-438**, Type-1, Class-A Boro 3.3 Glass
- Comes with Glass & Plastic screw thread connector
- Highly efficient with large cooling surface
- Suitable for Distillation & Reflux applications.

Item Code	Approx.Jacket Length (mm)	Approx. Overall Height (mm)	Connector	Pack of	Price / Piece
182.407.02	200	345	Glass	1	660
182.407.03	300	445	Glass	1	558
182.407.04	400	545	Glass	1	588
182.407.05	500	645	Glass	1	708



Buy Now!



Condenser Coil

- Complies with ASTM E-438, Type-1, Boro 3.3 Glass
- Comes with plastic screw thread connector
- Highly efficient with a large cooling surface
- Suitable for Distillation & Reflux applications

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
183.181.01	14/23	160	14/23	Screw Thread	1	983
183.181.01A	19/26	160	19/26	Screw Thread	1	983
183.181.02A	14/23	250	14/23	Screw Thread	1	1179
183.181.03	19/26	250	19/26	Screw Thread	1	1179
183.181.04	24/29	250	24/29	Screw Thread	1	1179
183.181.04A	29/32	250	29/32	Screw Thread	1	1179
183.181.05	24/29	300	24/29	Screw Thread	1	1512
183.181.06	29/32	300	29/32	Screw Thread	1	1512
183.181.07	29/32	400	29/32	Screw Thread	1	1535



Buy Now!



ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
183.481.03	24/40	200	24/40	Screw Thread	1	1208
183.481.05	24/40	300	24/40	Screw Thread	1	1570
183.481.07	24/40	400	24/40	Screw Thread	1	1587



Buy Now!

Condensers

Condenser Coil

- Complies with ASTM E 438 type 1, Boro 3.3 Glass
- Comes with glass connectors
- Highly efficient with a large cooling surface
- Suitable for Distillation & Reflux applications



Buy Now!


Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
183.202.01	14/23	160	14/23	Glass	1	932
183.202.01A	19/26	160	19/26	Glass	1	932
183.202.02A	14/23	250	14/23	Glass	1	1133
183.202.03	19/26	250	19/26	Glass	1	1133
183.202.04	24/29	250	24/29	Glass	1	1133
183.202.04A	29/32	250	29/32	Glass	1	1133
183.202.05	24/29	300	24/29	Glass	1	1009
183.202.06	29/32	300	29/32	Glass	1	1484
183.202.08	24/29	400	24/29	Glass	1	1461
183.202.07	29/32	400	29/32	Glass	1	1056
183.202.09	29/32	500	29/32	Glass	1	1329

ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
183.402.04	24/40	200	24/40	Glass	1	1162
183.402.05	24/40	300	24/40	Glass	1	1173
183.402.07	24/40	400	24/40	Glass	1	1489

Condenser Allihin

- Complies with ASTM E-438, Type-1, Boro 3.3 Glass
- Complies with DIN 12581
- Ideal for reflux and comes with glass and plastic screw thread connector
- Inner bulb section provides increased cooling surface and is ideal for Reflux Applications

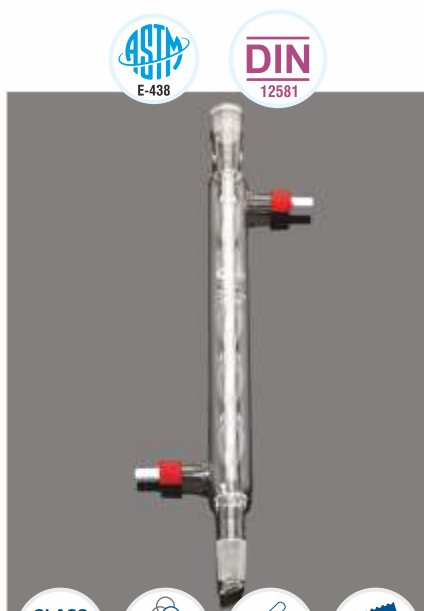

Buy Now!

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.181.05*	14/23	160	14/23	Screw Thread	1	983
190.181.06	19/26	160	19/26	Screw Thread	1	983
190.181.07*	14/23	250	14/23	Screw Thread	1	1058
190.181.08*	19/26	250	19/26	Screw Thread	1	1058
190.181.09*	24/29	250	24/29	Screw Thread	1	1058
190.181.09A	29/32	250	29/32	Screw Thread	1	1144
190.181.10*	24/29	300	24/29	Screw Thread	1	1248
190.181.11*	29/32	300	29/32	Screw Thread	1	1248
190.181.12*	24/29	400	24/29	Screw Thread	1	1420
190.181.13*	29/32	400	29/32	Screw Thread	1	1420

* Non Din

ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.482.09	24/40	200	24/40	Screw Thread	1	1156
190.482.11	24/40	300	24/40	Screw Thread	1	1173
190.482.13	24/40	400	24/40	Screw Thread	1	1489

Condenser Allihin

- Complies with ASTM E-438, Type-1, Class A, Boro 3.3 Glass
- Complies with DIN 12581
- Ideal for reflux and comes with glass and plastic screw thread connector
- Inner bulb section provides increased cooling surface and is ideal for Reflux Applications

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.202.05*	14/23	160	14/23	Glass	1	932
190.202.06	19/26	160	19/26	Glass	1	932
190.204.06A*	19/26	200	19/26	Glass	1	844
190.202.07*	14/23	250	14/23	Glass	1	1006
190.202.08*	19/26	250	19/26	Glass	1	1006
190.202.09*	24/29	250	24/29	Glass	1	1006
190.202.09A	29/32	250	29/32	Glass	1	1075
190.202.10*	24/29	300	24/29	Glass	1	846
190.202.11*	29/32	300	29/32	Glass	1	1208
190.202.12*	24/29	400	24/29	Glass	1	1032
190.202.13*	29/32	400	29/32	Glass	1	1386
190.202.14*	29/32	600	29/32	Glass	1	1447

* Non Din



Buy Now!

ASTM Sizes

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.402.08	24/40	200	24/40	Glass	1	1052
190.402.10	24/40	300	24/40	Glass	1	1052
190.402.12	24/40	400	24/40	Glass	1	1093




Buy Now!

Condenser, Dimroth

- Compliance with DIN 12591
- Manufactured from ASTM E-438, Type-1, Class-A, Boro 3.3 Glass
- The condenser comes with plastic screw thread connector

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.181.01A*	14/23	160	14/23	Screw Thread	1	1196
190.181.02A*	19/26	160	19/26	Screw Thread	1	1196
190.181.03A*	19/26	250	19/26	Screw Thread	1	1351
190.181.04A*	24/29	250	24/29	Screw Thread	1	1351
190.181.05A*	29/32	250	29/32	Screw Thread	1	1351
190.181.06A*	24/29	300	24/29	Screw Thread	1	1466
190.181.07A*	29/32	300	29/32	Screw Thread	1	1466
190.181.08A	29/32	400	29/32	Screw Thread	1	1662

* Non Din

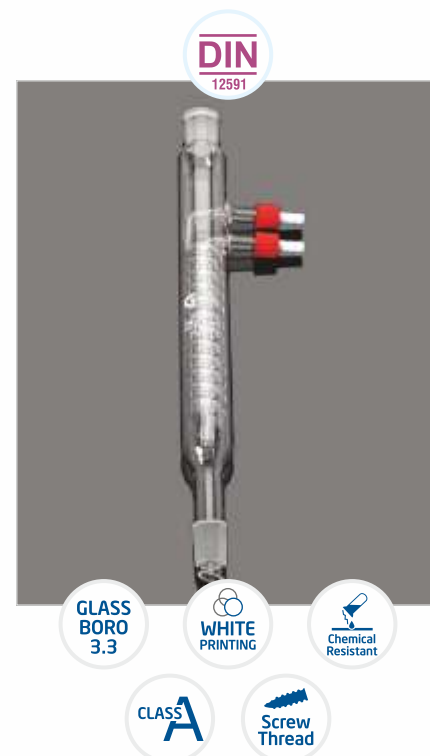

Buy Now!

Condensers



Buy Now!

Condenser, Dimroth

- Compliance with DIN 12591
- Manufactured from ASTM E-438, Type-1, Class-A, Boro 3.3 Glass
- The condenser comes with glass screw thread connector

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
190.204.01*	14/23	160	14/23	Glass	1	1110
190.204.02*	19/26	160	19/26	Glass	1	1110
190.204.03*	19/26	250	19/26	Glass	1	1271
190.204.04*	24/29	250	24/29	Glass	1	1271
190.204.05	29/32	250	29/32	Glass	1	1271
190.204.06*	24/29	300	24/29	Glass	1	1386
190.204.07*	29/32	300	29/32	Glass	1	1386
190.204.08	29/232	400	29/232	Glass	1	1587

* Non Din



Buy Now!

Condenser, Double Surface

- Made From Heat Resistant Low Expansion 3.3 Borosilicate Glass

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
187.202.03	19/26	200	19/26	Glass	1	2700
187.202.04	24/29	200	24/29	Glass	1	3559
187.202.12	19/26	300	19/26	Glass	1	2870
187.202.13	24/29	300	24/29	Glass	1	3886

ASTM Sizes



Buy Now!

Item Code	Socket	Effective Length(mm)	Cone	Connector	Pack of	Price / Piece
187.402.01	14/20	110	14/20	Glass	1	2588
187.402.02	19/22	110	19/22	Glass	1	2588
187.402.03A	24/40	200	24/40	Glass	1	3715
187.402.03	19/22	200	19/22	Glass	1	3444

Condenser, Friedrichs

- Drip Tip
- Interchangeable Inner and Outer Joint
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass.

Item Code	Socket	Overall Height (mm)	Cone	Connector	Pack of	Price / Piece
180.202.10	24/29	350	24/29	Glass	1	4198



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

ASTM Sizes

Item Code	Socket	Overall Height (mm)	Cone	Connector	Pack of	Price / Piece
340.470.01	24/29	330	24/40	Glass	1	4080



Buy Now!

Condenser, Reflux, Glass Connector

- Coil style reflux condenser with tightly warped coil providing maximum cooling
- Drip Tip

Item Code	Overall Height (mm)	Socket Size	Cone Size	Pack of	Price / Piece
347.470.01	205 MM	14/20	14/20	1	1482
347.470.04	365 MM	24/40	24/40	1	1830



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Ceramic



Upto
700°C



Buy Now!

Crucible, Porcelain (Euro Design), Squat Form

- Made of Ceramic
- With Lid
- Upto 700°C

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Pack
522.303.13	2	18	12	6	798
522.303.14	8	32	20	6	936
522.303.15	17	41	26	4	740
522.303.16	30	50	31	4	820
522.303.17	50	61	37	4	984
522.303.18	100	76	46	2	738
522.303.19	150	84	52	2	838



Ceramic



Upto
700°C



Buy Now!

Crucible, Porcelain (Euro Design)

- Made of Ceramic
- With Lid
- Upto 700°C

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Type	Pack of	Price / Pack
523.303.11	1.3	15	15	Tall Form	6	792
523.303.12	5	24	20	Tall Form	6	876
523.303.13	10	31	26	Medium Form	4	612
523.303.14	15	35	29	Medium Form	4	708
523.303.15	30	45	36	Medium Form	4	820
523.303.16	45	50	40	Medium Form	2	456
523.303.17	50	53	43	Medium Form	2	536
523.303.18	100	65	54	Medium Form	2	724

Crucible, Quartz

- Made of Quartz Gel & Powder,
- Tolerance upto 1000°C

Item Code	Size (ml)	Type	Pack of	Price / Pack
521.303.01	15	Without Lid	4	3744
521.303.02	25	Without Lid	4	3860
521.303.03	50	Without Lid	2	3102
521.303.04	100	Without Lid	2	5398
521.303.05	15	With Lid	4	5216
521.303.06	25	With Lid	4	7440
521.303.07	50	With Lid	2	5932
521.303.08	100	With Lid	2	9128



Buy Now!



Quartz Gel



Upto 1000°C



TALL FORM

Crucible, Silica

- With Lid
- Goes upto 700°C

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Pack
518.303.01	15	41	25	6	5022
518.303.02	25	47	28	6	5514
518.303.03	50	57	37	6	9678
518.303.04	80	67	45	4	10608
518.303.05	100	71	50	4	13240
518.303.06	150	82	51	4	15340



Buy Now!



SiO2



Upto 700°C



LOW FORM

Crucibles



SiO₂

Upto
700°C

LOW FORM



Buy Now!

Crucible, Silica

- Without Lid
- Goes upto 700°C

Item Code	Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price / Pack
519.303.01	15	41	25	6	2514
519.303.02	25	47	28	6	2844
519.303.03	50	57	37	6	5268
519.303.04	80	67	45	4	5912
519.303.05	100	71	50	4	7568
519.303.06	150	82	51	4	9228



SS

Grade
202




Buy Now!

Crucible, Tong

- Made of SS, Grade 202

Item Code	Size (mm)	Pack of	Price / Pack
355.303.01	150	4	788
355.303.02	200	4	1008
355.303.03	250	4	1456
355.303.04	300	4	1840
355.303.05	375	4	2456
355.303.06	450	4	2920
355.303.07	600	4	6212

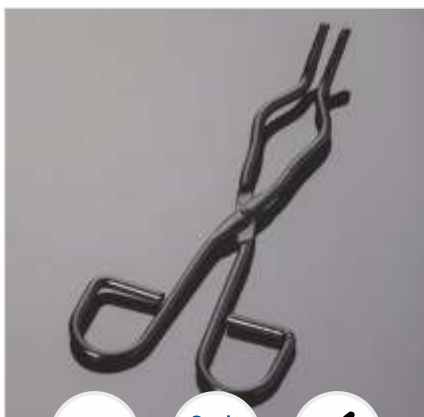

SS

Grade
202

Black Paint



Buy Now!

Crucible, Tong

- Made of mild steel
- Black painted/chrome plated

Item Code	Size (mm)	Type	Pack of	Price / Pack
367.303.01	150	Black Painted	4	672
367.303.02	200	Black Painted	4	768
367.303.03	300	Black Painted	4	1452
367.303.04	150	Chrome Painted	4	692
367.303.05	200	Chrome Painted	4	768
367.303.06	300	Chrome Painted	4	1348

Crucible, Holders

- Available set of 7

Item Code	Type	Pack of	Price / Pack
416.303.01	Set of 7, made of Natural Rubber	1	523
416.303.02	Set of 7, made of Silicon	1	1594


[Buy Now!](#)


Silicone

Crucible, Filter, With Sintered Disc

- Made from ASTM E-438 type-1 Class A Boro 3.3 glass

Item Code	Porosity	Capacity (ml)	Pack of	Price / Piece
255.G00.01	0	15	10	463
255.G01.01	1	15	10	463
255.G02.01	2	15	10	452
255.G03.01	3	15	10	463
255.G04.01	4	15	10	463
255.G05.01	5	15	10	575
255.G00.02	0	30	10	621
255.G01.02	1	30	10	621
255.G02.02	2	30	10	615
255.G03.02	3	30	10	621
255.G04.02	4	30	10	610
255.G05.04	5	30	10	764
255.G00.03	0	50	10	723
255.G01.03	1	50	10	723
255.G02.03	2	50	10	716
255.G03.03	3	50	10	716
255.G04.03	4	50	10	730
255.G05.03	5	50	10	905


[Buy Now!](#)
GLASS
BORO
3.3WHITE
PRINTINGChemical
Resistant

LOW FORM

Cylinders



Buy Now!

Cylinder, Measuring, Class A

- Complies as per DIN EN ISO 4788
- With hexagonal base
- With individual work certificate

Item Code	Capacity (ml)	Sub Division (ml)	Tolerance ($\pm$ ml)	Pack of	Price / Piece
139.523.00A	5	0.1	0.05	1	554
139.523.01A	10	0.2	0.10	1	627
139.523.02A	25	0.5	0.25	1	736
139.523.03A	50	1.0	0.50	1	891
139.523.04A	100	1.0	0.50	1	1012
139.523.04B*	150	1.0	1.00	1	1310
139.523.05A	250	2.0	1.00	1	1487
139.523.06A	500	5.0	2.50	1	2076
139.523.07A	1000	10.0	5.00	1	2531
139.523.08A	2000	20.0	10.00	1	4791

* Non DIN



Buy Now!

Cylinder, Measuring, Class A NABL

- Complies as per DIN EN ISO 4788
- With hexagonal base
- With individual work certificate

Item Code	Capacity (ml)	Sub Division (ml)	Tolerance ($\pm$ ml)	Pack of	Price / Piece
139.505.01A	10	0.2	0.10	1	1458
139.505.02A	25	0.5	0.25	1	1728
139.505.03A	50	1.0	0.50	1	2028
139.505.04A	100	1.0	0.50	1	2313
139.505.05A	250	2.0	1.00	1	3511
139.505.06A	500	5.0	2.50	1	4779
139.505.07A	1000	10.0	5.00	1	5894
139.505.08A	2000	20.0	10.00	1	7174

Cylinder, Measuring, Graduated Class B, Hex Base

- Complies with **DIN EN ISO 4788**
- Printed in Blue colour

Item Code	Capacity (ml)	Sub Division (ml)	Pack of	Price / Piece
138.522.00A	5	0.1	2	297
138.522.01A	10	0.2	2	347
138.522.02A	25	0.5	2	413
138.522.03A	50	1.0	2	451
138.522.04A	100	1.0	2	512
138.522.04B*	150	1.0	2	745
138.522.05A	250	2.0	2	930
138.522.06A	500	5.0	2	1216
138.522.07A	1000	10.0	1	1837
138.522.08A	2000	20.0	1	3531

* Non DIN



Buy Now!



Cylinder, Measuring, Class A, Hexa Base, Serialized

- Complies as per USP Standards
- With individual work certificate
- Printed in Amber colour

Item Code	Capacity (ml)	Sub Division (ml)	Tolerance (± ml)	Pack of	Price / Piece
139.221.00A	5	0.1	0.05	1	633
139.221.01A	10	0.2	0.10	1	732
139.221.02A	25	0.5	0.15	1	831
139.221.03A	50	1.0	0.25	1	1007
139.221.04A	100	1.0	0.50	1	1133
139.221.05A	250	2.0	1.00	1	1612
139.221.06A	500	5.0	1.50	1	2140
139.221.07A	1000	10.0	3.00	1	2618
139.221.08A	2000	20.0	6.00	1	4956



Buy Now!



Cylinders



Cylinder, Measuring, Class A

- Complies as per **USP Standards**
- With Detachable PP base
- Protection collar individual works
- Calibrated at 20°C



Buy Now!

Item Code	Capacity (ml)	Tolerance (±ml)	Pack of	Price / Piece
137.221.02	10	0.10	1	778
137.221.03	25	0.15	1	831
137.221.04	50	0.25	1	948
137.221.05	100	0.50	1	1117
137.221.06	250	1.00	1	1556
137.221.07	500	1.50	1	2264
137.221.08	1000	3.00	1	2867



Cylinder, Measuring, Class B

- With detachable PP base
- With protection collar
- Printed in Blue colour.



Buy Now!

Item Code	Capacity (ml)	Tolerance (±ml)	Pack of	Price / Piece
137.502.02	10	0.200	10	310
137.502.03	25	0.500	10	380
137.502.04	50	1.000	10	468
137.502.05	100	1.000	10	532
137.502.06	250	2.000	10	673
137.502.07	500	5.000	1	825
137.502.08	1000	10.00	1	1375

Cylinder, Mixing, Class A

- Complies as per DIN EN ISO 4788 standards
- With Penny Head & PP stopper
- With hexagonal base
- With individual work certificate.

Item Code	Capacity (ml)	Tolerance (±ml)	Sub Division	Stopper Size	Pack of	Price / Piece
142.576.01	10	0.10	0.2	10/19	1	1029
142.576.02	25	0.25	0.5	14/23	1	1173
142.576.03	50	0.50	1.0	19/26	1	1323
142.576.04	100	0.50	1.0	24/29	1	1581
142.576.05	250	1.00	2.0	29/32	1	2467
142.576.06	500	2.50	5.0	34/35	1	3191
142.576.07	1000	5.00	10.0	45/40	1	3893
142.576.08	2000	10.00	20.0	45/40	1	6147



Buy Now!



Cylinder, Mixing, Class A

- Complies as per DIN EN ISO 4788 standards
- NABL Certified
- With Penny Head & PP stopper
- With hexagonal base
- With individual work certificate.



Item Code	Capacity (ml)	Tolerance (±ml)	Sub Division	Stopper Size	Pack of	Price / Piece
142.508.01	10	0.10	0.2	10/19	1	1691
142.508.02	25	0.25	0.5	14/23	1	2110
142.508.03	50	0.50	1.0	19/26	1	2352
142.508.04	100	0.50	1.0	24/29	1	2547
142.508.05	250	1.00	2.0	29/32	1	3421
142.508.06	500	2.50	5.0	34/35	1	4238
142.508.07	1000	5.00	10.0	45/40	1	6245
142.508.08	2000	10.00	20.0	45/40	1	8332



Buy Now!



Cylinders



Cylinder, Mixing, Class B

- Complies as per DIN EN ISO 4788 standards
- With hexagonal base Penny Head & PP stopper



Buy Now!

Item Code	Capacity (ml)	Tolerance (± ml)	Sub Division	Stopper Size	Pack of	Price / Piece
142.509.01	10	0.20	0.2	10/19	1	529
142.509.02	25	0.50	0.5	14/23	1	598
142.509.03	50	1.00	1.0	19/26	1	667
142.509.04	100	1.00	1.0	24/29	1	822
142.509.05	250	2.00	2.0	29/32	1	1369
142.509.06	500	5.00	5.0	34/35	1	1909
142.509.07	1000	10.00	10.0	45/40	1	2754
142.509.08	2000	20.00	20.0	45/40	1	4750



Cylinder, Tapped Density Cylinder as per USP

- Complies as per USP 616
- Used in tapped density apparatus to measure bulk density of powders



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Piece
139.520.01A	100 & 250	1 Each	3153

Cylinder, Tapped Density Cylinder as per USP 616



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Piece
139.521.04A	100	2	1645

Cylinder, Tapped Density Cylinder as per USP 616



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Piece
139.521.05A	250	2	1898

Cylinder, Nessler

- For colour comparison CLASS B Graduated

Item Code	Capacity (ml)	Sub Division	Pack of	Price / Piece
143.502.01B	50	25 & 50	10	220
143.502.02B	100	50 & 100	10	328



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

CLASS
B

Cylinder, Rain Measure, Metric Scale, Graduated, With Round Base

- Complies with IS 4849
- Manufactures with chemically resistance 3.3 borosilicate glass
- Graduation in white enamel
- The cylinders are graduated to indicate rainfall in mm when used with appropriate rain collector

Item Code	Size mm	Used for Collector Area cm ²	Graduation Interval mm	Tolerance $\pm$ mm	Pack of	Price / Piece
139.500.01	20	200	0.2	0.05	5	1430
139.500.02	20	100	0.2	0.10	10	1667



Buy Now!



IS
4849

GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Riders/Bumpers for cylinders

Item Code	Bumper for Cylinders (ml)	Pack of	Price / Piece
136.202.01	5	100	55
136.202.02	10	100	55
136.202.03	25	100	55
136.202.04	50	100	55
136.202.05	100	100	68
136.202.06	250	50	86
136.202.07	500	50	99
136.202.08	1000	25	105
136.202.09	2000	10	117



Buy Now!



Cylinders



Cylinder, Measuring, Hexagonal

- Made from Polypropylene
- These are now available with hexagonal base also
- The hexagonal base provides excellent stability to the cylinder where as the tapered spout works really while pouring any reagent

Item Code	Capacity (ml)	Least Count (ml)	Pack of	Price /Pack
177.303.01	10	0.2	24	942
177.303.02	25	0.5	12	714
177.303.03	50	1	12	788
177.303.04	100	1	12	861
177.303.05	250	2	6	874
177.303.06	500	5	4	892
177.303.07	1000	10	2	849



Nylon

Cylinder, Brush

Item Code	Type	Material	Pack of	Price /Pack
593.303.05	Cylinder Brush	Nylon	50	5950

Desiccator, With Lid, Plain

- Complies with DIN 12491
- Die pressed
- Neutral Glass with Porcelain perforated plate

Item Code	I.D (mm)	Pack of	Price /Piece
249.202.01	150	1	4308
249.202.02*	210	1	7236
249.202.03	250	1	10116
249.202.04	300	1	20410

* Non DIN



Desiccator, With Lid, Vacuum

- Complies with DIN 12491
- Die Pressed
- Neutral Glass with Porcelain Perforated Plate and Glass Sleeve

Item Code	I.D (mm)	Pack of	Price /Piece
250.202.01	150	1	7956
250.202.02*	210	1	12215
250.202.03	250	1	19638
250.202.04	300	1	26209

* Non DIN



Dishes

Manufactured from ASTM E 438 TYPE 1 Class A BORO 3.3 GLASS. These dishes are as per DIN and USP standards. The dishes are printed in white colour and have marking area to use with ordinary pencil.



Dish, Crystallizing, without Spout

- Complies with DIN 12337
- Made of Boro 3.3 Glass, Heat & Chemical resistance Glass

Item Code	Diameter x Height (mm)	Pack of	Price /Piece
246.202.01	40x 25	10	164
246.202.02	50x30	10	174
246.202.03	60x35	10	206
246.202.04	70x40	10	283
246.202.05	80x45	10	309
246.202.06	95x55	10	576
246.202.07	115x65	10	706
246.202.08	140x75	10	1032
246.202.09	190x90	10	1692



Dish, Crystallizing, with Spout

- Complies with DIN 12338
- Made of Boro 3.3 Glass, Heat & Chemical resistance Glass

Item Code	O.D x Height (mm)	Pack of	Price /Piece
246.202.01S	40x 25	10	176
246.202.02S	50x30	10	196
246.202.03S	60x35	10	228
246.202.04S	70x40	10	303
246.202.05S	80x45	10	325
246.202.06S	95x55	10	524
246.202.07S	115x65	10	759
246.202.08S	140x75	10	934
246.202.09S	190x90	10	1525

Dish, Evaporating

- Complies with DIN 12336
- Manufactured from Boro 3.3 glass
- High resistance to chemical attack and thermal shock
- Flat base
- Curved sides with spout

Item Code	Approx Capacity (ml)	Dia (mm)	Height (mm)	Pack of	Price /Piece
247.202.00	15	50	25	10	336
247.202.00B	45	60	30	10	450
247.202.01	90	80	45	10	510
247.202.02	170	95	55	10	544
247.202.02C*	290	105	55	10	704
247.202.02A	320	115	65	10	669
247.202.03D	600	140	80	10	1210
247.202.03A*	1500	150	80	10	1344
247.202.04*	2500	200	100	10	2435

* Non DIN

**Dish, Evaporating, Euro Design**

- Made of Porcelain
- Goes upto 700°C

Item Code	Capacity (ml)	OD x Height (mm)	Pack of	Price /Pack
528.303.07	35	60 x 24	6	906
528.303.08	70	75 x 30	6	984
528.303.09	80	80 x 30	6	1074
528.303.10	120	94 x 42	6	1110
528.303.11	150	100 x 42	6	1194
528.303.12	250	115 x 45	4	844
528.303.13	385	145 x 48	4	1928
528.303.14	525	162 x 51	2	1430
528.303.15	765	185 x 54	2	2946





GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Dish, Petri, Manufactured from BORO 3.3 Glass

- Withstand repeated Autoclaving

Item Code	O.D. x Height (mm)	Pack of	Price /Piece
248.202.01	50 x 17	10	231
248.202.02	80 x 17	10	297
248.202.03	100 x 17	10	348
248.202.04	150 x 20	10	854
248.202.05	200 x 20	10	1848

Dish, Petri, SG Line

Item Code	O.D. x Height (mm)	Pack of	Price /Piece
248.203.03	90 x 15	36	123
248.203.04	100 x 15	36	123



121°C
SSSS

Unbreakable

Dish, Petri (Disposable)

- These transparent, ready to use, disposable Petri Dishes
- Made of optically clear, non-toxic, Polystyrene

Item Code	Size (mm)	Pack of	Price /Pack
159.303.01	90	36	554

Dish, Rack For Petri Dish

- Made from Polymethyl Methacrylate / Polycarbonate
- Clear acrylic construction with white Polycarbonate Posts
- Capacity to hold 60 petri dishes of 90 mm size
- Useful during inoculation, incubation & Storage
- Visibility from all sides enables the culture to be seen & checked during incubation

Item Code	Size (mm)	Pack of	Price /Pack
160.303.01	90	2	3918
160.303.02	60	2	3647



Dish, Pestle & Mortar, Euro Design

- Made of Porcelain
- Goes upto 700°C

Item Code	I.D. x Height (mm)	Pack of	Price /Pack
529.303.08	60 x 44	6	1356
529.303.09	75 x 48	4	1064
529.303.10	85 x 55	4	1248
529.303.11	100 x 70	4	1732
529.303.12	117 x 75	4	2288
529.303.13	125 x 88	2	1318
529.303.15	150 x 100	1	832
529.303.16	175 x 115	1	1692
529.303.17	200 x 140	1	1768



Distillation



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Distilling Apparatus, Ammonia, With Graham condenser

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- Interchangeable Joints
- With Splash Head 24/29, 19/26
- With Kjeldahl flask 500ml 24/29
- With Coil condenser 200mm 19/26

Item Code	Capacity (ml)	Pack of	Price /Piece
340.202.03	500	1	4250



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Distilling Apparatus, With Graham Condenser

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- Interchangeable Joints & Stopper
- Flat bottom distillation flask 500 ml 24/29, 19/26
- With Coil condenser 200mm 19/26

Item Code	Cap. (ml)	Coil Condenser (mm)	Interchangeable Joint	Pack of	Price / Piece
341.202.03	500	200	19/26	1	4207

Distilling Apparatus, with Friedrichs Condenser

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- Interchangeable Joint and Stopper

Item Code	Capacity (ml)	Interchangeable Joint	Pack of	Price /Piece
342.202.03	2000	24/29	1	5383



Distilling Apparatus, Compact with Friedrichs Condenser

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- Interchangeable Joint

Item Code	Capacity (ml)	Interchangeable Joint	Pack of	Price /Piece
343.202.04	1000	34/35	1	5093



Distillation



GLASS
BORO
3.3



Alcohol Distillation Unit

- Ideal for Alcohol Distillation

Item Code	Capacity (ml)	Pack of	Price /Piece
347.202.01	1000	1	12230

RM Value Apparatus

- To be Used in Dairy Industries for the Analysis of Oil & Waxes

Item Code	Capacity (ml)	Pack of	Price /Piece
348.202.01	300	1	2600



GLASS
BORO
3.3



Essential Oil Determination Apparatus (Clevenger Apparatus)

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- For Oil Heavier Than Water
- Round bottom Flask 1000ml-24/29
- Liebig condenser 300mm-24/29, without socket

Item Code	Capacity (ml)	Pack of	Price /Piece
226.202.01	1000	1	9769

Essential Oil Determination Apparatus (Clevenger Apparatus)

- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- For Oil Lighter Than Water
- Round bottom flask 1000ml-24/29
- Liebig condenser 300mm-24/29, without sockets
- Dean Stark 10 ml

Item Code	Capacity (ml)	Pack of	Price /Piece
227.202.01	1000	1	9769



Distilling Apparatus, Dean and Stark

- Moisture Test
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass
- Round bottom Flask 1000ml-24/29
- Liebig condenser 300mm-19/26
- Dean Stark 10 ml

Item Code	Capacity (ml)	Pack of	Price /Piece
227.202.01A	10	1 Set	3505



Distillation

Short Path Distillation Kit *New*

- Boiling Flask 2 & 10 Ltr
- With Compression Cap
- Used for distillation of large volumes.
- Made from borosilicate 3.3 glass.
- White printing

Item Code	Capacity (Ltr.)	Pack of	Price /Piece
351.202.00	2	1	50160
351.202.02	10	1	54670



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Sr. No.	Capacity (2 Ltr.)	Capacity (10 Ltr.)	Qty (Pcs)
1.	Round bottom flask 2000ml three neck, parallel, centre socket 24/40, side sockets 34/45	Round bottom flask 10000ml three neck, parallel, centre socket 24/40, side sockets 34/45	1
2.	Recovery flask, 500ml, socket 24/40	Recovery flask, 2000ml, socket 24/40	6
3.	Distillation still head with double surface coil condenser effective length 85mm. cone 24/40, with GL 14 cap for thermometer inlet & cone to fit flask 34/45	Distillation still head with double surface coil condenser effective length 85mm. cone 24/40, with GL 14 cap for thermometer inlet & cone to fit flask 34/45	2
4.	Adapter distilling receiver 100ml without hose connection cow type design socket 24/40 cone 24/40	Adapter distilling receiver 250ml without hose connection cow type design socket 24/40 cone 24/40	2
5.	Adapter inlet/thermometer joint 24/40 with compression cap and O'ring.	Adapter inlet/thermometer joint 24/40 with compression cap and O'ring.	1
6.	Conical joint clips keck pom 24/40 (green)	Conical joint clips keck pom 24/40 (green)	8
7.	Conical joint clips keck pom 34/45 (orange)	Conical joint clips keck pom 34/45 (orange)	2
8.	Glass caps 24/40 with flat bottom for distillation receiver	Glass caps 24/40 with flat bottom for distillation receiver	4
9.	Screw thread cap GL-14 with liner	Screw thread cap GL-14 with liner	6

Analog

Digital

Compatible Heating Mantle options



For more information
Please visit **Page No. 209 & 210**

Short Path Distillation Head *New*

- Glass Connector to connect rubber tube of ID 8.0 mm
- PP Screw Cap GL-14 to carry Thermometer

Item Code	Pack of	Price /Piece
345.402.01	1	18139



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Kjeldhal Distillation Unit *New*

- Kjeldhal Flask 500ml, Socket 24/29
- Conical Flask 250ml
- With Plastic hose connection, straight
- Adapter Multiple Socket 19/26, Cone 24/29
- Dropping Funnel with cone 19/26 & Leibig condenser 350mm
- Adapter slash head 19/26 & Receiver adapter straight steam

Item Code	Keck Joint	Screw Thread	Pack of	Price /Piece
1194.000.05	19/26 & 24/29	GL-14	1	7380



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Moisture Determination Unit *New*

- Dean Stark Graduated 2ml, Socket 19/26, Cone 24/29
- Liebig Condenser 200mm, Cone 19/26 without socket
- Round Bottom Flask 250ml 24/29

Item Code	Keck Joint	Pack of	Price /Piece
465.000.01	19/26 & 24/29	1	5736



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Inhaler Testing Kit *New*

- Gas Wash Bottle 500ml, Socket 29/32
- PP Screw Cap GL-28 & Keck clamp 14/23, 24/29, 29/32
- With 50ml Round Bottom Flask with cone 24/29 & socket 29/32
- Conical Flask 250ml, with socket 24/29
- Round Bottom angular Flask 100ml

Item Code	Pack of	Price /Piece
345.525.03	1	54720

Mancozeb Assembly Set

- Round Bottom Flask 100ml 24/29
- Liebig condenser 150mm 24/29
- Dip Tube, Trap & Absorber 10/19'

Item Code	Pack of	Price /Piece
228.202.01A	1	22560



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Fractional Distillation Equipment

- Round Bottom Flask 250ml, Socket 29/32
- Vigreux 320mm with NS 29/32,29/32
- Adapter, Still head plain socket 29/32, Cone 29/32,29/32
- Condenser Liebig 250mm 29/32 with Glass hose connector
- Adapter Receiver 29/32, short stem
- Adaptor Thermometer with compression cap 29/32
- Thermometer 10° to 110° C

Item Code	Keck Joint	Pack of	Price /Piece
328.202.02	29/32	1	21300




Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

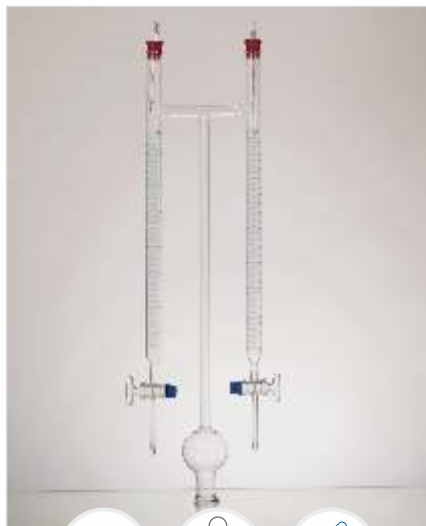

GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Hoffman Voltameter



Buy Now!

Item Code	Pack of	Price /Piece
325.202.01	1	9000



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Simple Distillation Equipment Set

- Round Bottom Flask 250ml, NS 29/32
- Adapter, Still head plain socket 29/32, Cone 29/32, 29/32
- Condenser Liebig 250mm 29/32 with Glass hose connector
- Adapter Receiver 29/32, short stem
- Adaptor Thermometer with compression cap 29/32
- Thermometer 10° to 110° C



Buy Now!

Item Code	Pack of	Price /Piece
328.202.01A	1	9000

Extractor Apparatus

- Complete with condenser & flasks

Item Code	Extractor cap.(ml)	Extractor Socket	Extractor Cone	Flask Cap.	Condenser Type	Connector	Pack of	Price / Piece
210.502.03	60	34/35	24/29	150	Allihin	Glass	1	1978
210.502.04B	100	40/38	24/29	250	Allihin	Glass	1	2340
210.502.04	100	45/40	29/32	250	Allihin	Glass	1	2151
210.502.06A	200	50/42	24/29	500	Allihin	Glass	1	4035
210.502.06	250	45/40	29/32	500	Allihin	Glass	1	3720
210.502.08	500	60/46	29/32	1000	Allihin	Glass	1	12960
210.502.09	1000	71/51	29/32	2000	Allihin	Glass	1	20858
210.202.12	100	45/40	29/32	250	Dimroth	Screw Thread	1	3456
210.202.13	150	45/40	29/32	250	Dimroth	Screw Thread	1	3847
210.202.14	250	45/40	29/32	500	Dimroth	Screw Thread	1	4111
210.202.15	500	60/46	29/32	1000	Dimroth	Screw Thread	1	8349
210.202.16	1000	71/51	29/32	2000	Dimroth	Screw Thread	1	13639

PS : For ordering of instruments used with glass see page no 192,193 & 203

Available with

Single Soxhlet Extraction Unit

Extraction unit metal stand with heating mantle

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension	No. of Position of regulator	Price / Piece
1101.DNEU.02	100	150	280x210x520	1/1	16390
1101.DNEU.03	250	150	280x210x520	1/1	16610
1101.DNEU.04	500	200	280x210x520	1/1	16830



1101.EU

Single Soxhlet Extraction Unit with Stirrer

Extraction unit metal stand with heating mantle stirrer

Model No. (230V, 50Hz)	Capacity (ml)	Watts	No. of Position of regulator	Price / Piece
1600.DNEU.01*	100	170	1/1	22220
1600.DNEU.02*	250	170	1/1	22550
1600.DNEU.03*	500	220	1/1	24090

*Also Available with 3 Position & 6 Position Heating Mantle

Please refer to page no 221-222



1601.EU

Extractor

Item Code	Capacity (ml)	Socket	Cone	Pack of	Price / Piece
211.202.03*	60	34/35	24/29	1	966
211.202.04B*	100	40/38	24/29	1	1392
211.202.04	100	45/40	29/32	1	1472
211.202.06A*	200	50/42	24/29	1	1748
211.202.06	250	45/40	29/32	1	1662
211.202.08	500	60/46	29/32	1	3720
211.202.09	1000	71/51	29/32	1	4721

* Non DIN



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



DIN
12602

GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Extraction Apparatus

Condensers Allihin for Soxhlet Apparatus

- Manufactured from ASTM E-438, Type-1, Class-A boro 3.3 Glass
- This condenser come with glass screw thread connector

Item Code	Cone	Effective Length (mm)	Extractor (ml)	Connector	Pack of	Price / Piece
191.202.01	45/40	300	100	Glass	1	1104
191.202.01A	45/40	400	250	Glass	1	1139
191.202.02	60/46	400	500	Glass	1	1944
191.202.03	71/51	400	1000	Glass	1	2306



Condensers Allihin for Soxhlet Apparatus

- Manufactured from ASTM E-438, Type-1, Class-A boro 3.3 Glass.
- This condenser come with plastic screw thread connector

Item Code	Cone	Effective Length (mm)	Extractor (ml)	Connector	Pack of	Price / Piece
191.181.01	45/40	300	100	Screw Thread	1	1225
191.181.01A	45/40	400	250	Screw Thread	1	1225
191.181.02	60/46	400	500	Screw Thread	1	1961
191.181.03	71/51	400	1000	Screw Thread	1	2306





GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Condenser, Dimroth for Soxhlet Apparatus

- Manufactured from ASTM E-438, Type-1, Class-A
- Made from Boro 3.3 Glass
- This condenser come with glass screw thread connector

Item Code	Cone	Effective Length (mm)	Extractor (ml)	Connector	Pack of	Price / Piece
192.202.01	45/40	300	100	Glass	1	1696
192.202.01A	45/40	400	250	Glass	1	1696
192.202.02	60/46	400	500	Glass	1	2053
192.202.03	71/51	400	1000	Glass	1	2559



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Screw
Thread

Condenser, Dimroth for Soxhlet Apparatus

- Manufactured from ASTM E-438, Type-1, Class-A
- Made from Boro 3.3 Glass
- This condenser come with screw thread connector

Item Code	Cone	Effective Length (mm)	Extractor (ml)	Connector	Pack of	Price / Piece
192.181.01	45/40	300	100	Screw Thread	1	1714
192.181.01A	45/40	400	250	Screw Thread	1	1714
192.181.02	60/46	400	500	Screw Thread	1	2059
192.181.03	71/51	400	1000	Screw Thread	1	2553

Glassco Brand sintered glassware is used for the filtration of liquids and gases in the laboratory. It incorporates a porous glass disc as a filter media, which is non corrosive and reusable. It is also used for gas washing, dispersion and adsorption.

Sintered disc is manufactured by crushing Borosilicate glass, powdering, cleaning, separating into various mesh size and then fusing together in the form of a disc. The sintered disc is graded into 5 grades-G1, G2, G3, G4, and G5. The grades are classified by maximum pore size, which is obtained by measuring pressure at which the first air bubble breaks away from filter under certain conditions. The pressure differential is then used to calculate the equivalent capillary diameters in microns. The desired pore size is obtained by suitable controlling the grain size, firing time, temperature and the thickness of the disc. Each disc is tested and graded individually.

The pore diameters are reasonably uniform, which ensures required flow rate through the filter.

The flow rate further depends on pressure differential between the two sides of the disc, free area of the discs, viscosity of the fluid being filtered etc. Between different discs of same size and grade, there is a fair amount of uniformity in pore size and hence the results from two or more discs of the same size and grade will be uniform. This ensures reproducible analytical results.

The discs have maximum surface hardness and hence glass powder does not get scraped off during cleaning or with chemicals. Filters do not shed particles during usage.

The discs are sealed to tubing without blocking the pores. They are annealed properly in automatically controlled lehrs.

POROSITY GRADES AND THEIR GENERAL USE

Porosity Grade	Pore Size (Microns)	General use
1	90-150	Filtration of coarse materials/precipitates, gas Dispersion, gas washing, extractor bed, support for other filter materials.
2.	40-90	Filtration of medium precipitates gas dispersion, gas washing.
3.	15-40	Filtration of fine grain precipitates. Analytical work With medium precipitates mercury filtration.
4.	5-15	Analytical work with fine and very fine precipitates. Non return mercury valves.
5.	1-2	Bacteriological filtration.

Chemical Durability

Glassco Sintered ware is produced from the same high quality material from which all Glassco Brand borosilicate laboratory glassware are manufactured and thus, have excellent resistance to chemical attack.

Operating Pressure

The sintered discs and the glassco are incorporated; they are mainly designed for the application of vacuum or for passage of gases at a relatively low pressure. In all cases the differential pressure must not exceed 100 KN/m² (15psi).

Thermal Characteristics

The resistance to thermal shock of sintered ware is comparatively less as compared to standard Lab glassware. Therefore, articles of sintered ware should not be subjected to excessive temperature changes nor to direct flames.

Glassco Sintered crucibles are particularly suited for drying to constant weight. Dry sintered crucibles at room temperature can be placed directly into a drying oven at 150° C, although customary practice is to dry at 110° C. Sintered ware may safely be heated in furnace to 500° C without ill effect, provided that the cycle of heating and cooling is gradual, strains caused by excessive temperature of apparatus.

Sintered ware of porosity grades 4 and 5 when cold and damp should never be subjected to a sudden temperature change since the evolution of steam may set up sufficient pressure within the filter, to crack it.

Filtration apparatus should be kept on its rim (stem upwards) in oven or sterilizer. A perforated support base is advantageous for air convection in case pipeline filters. Care should be taken by use of heat insulating material such as asbestos to avoid premature near filter seal. Apparatus should remain in the oven or sterilizer during cooling to avoid too fast cooling rate.

Cleaning of Sintered Ware

New sintered filters should be washed carefully with hot hydrochloric acid and then rinsed with distilled water before they are used. This treatment will ensure that all loose particles are removed from the filter.

It is recommended that all sintered filters are thoroughly cleaned "immediately" after use. This is the most favorable time for ease of cleaning and will ensure less risk of contamination in subsequent use.

Many precipitates can be removed from the filter by backflushing with water. However, great care must be taken with large diameters and fine filter, as positive pressures on the reverse side may break the filter.

Under no circumstances, should sintered apparatus be subjected to mains water pressure when back flushing as in most instances a vacuum pump is also effective.

Filters clogged by dust and dirt during gas filtration can be restored by treatment with a warm detergent solution followed by blowing clean air from the clean side of the filter. Dirt particles are brought to the surface by the foam and removed by rinsing with water.

Some precipitates may clog filter which may be removed by chemical cleaning as given below.

Clean the porous glass part of the filter support by back flushing with warm water & then soaking overnight in a chromic acid cleaning solution.

Follow the soaking with another back flushing. After cleaning thoroughly, rinse the components with clean water & air dry. Do not wipe with paper or cloth, which may leave traces of fibers & lint.

All Glass Filter Holder

For 47 mm Disc Filters

Specifications:

Materials of Construction	Borosilicate glass funnel and base; anodized aluminum spring clamp; silicone stopper
260.202.01	Coarse-frit glass filter support
261.202.01	PTFE-faced funnel and base
262.202.01	Stainless steel screen filter support
Filter Diameter, mm	47
Filtration Area, cm ²	9.6
Funnel Capacity, mL	300; accessory 1 L is available
Prefilter Diameter, mm	35 (thick depth prefilter) or 47 (membrane prefilter)
Outlet Fitting	No. 8 perforated silicone stopper mounts in standard 1 L and 4 L filtering flasks
Dimensions	
Height, cm	22.9
Diameter, cm	7.6
Sterilization Method	
260.202.01 and 261.202.01	30 UV sterilize or autoclave without filter in-place
262.202.01	Autoclave with filter in-place



Applications :

Use 260.202.01 for

- Bacteriological analysis of water (using 47 mm sterile membrane filters) Analysis of suspended solids in water (using 47 mm depth filters)

Use 261.202.01 for

- Bacteriological analysis applications where autoclaving filter holder with membrane in place needed

Use 262.202.01 for

- Particulate contamination analysis of oils and hydraulic fluids by gravimetric or particulate counting methods Exfoliative cytology applications


Use 258.202.01 for

- Used in vacuum filter aqueous, organic or corrosive liquids for particulate contamination analysis
Recommended for HPLC solvent filtration



Glass Filter Holders


For 47 mm Disc Filters



Replacement Parts:

1. Funnel 300 ml
2. Base 47 mm Frit
3. Clamp 47 mm
5. Stopper 8 No.


Filter holder with glass filter support,
260.202.01



Replacement Parts:

1. Funnel 300 ml Teflon Coated
2. Clamp 47 mm
3. Base 47 mm Frit Teflon Coated
4. Stopper 8 No.

Filter holder with PTFE-faced filter
support, 261.202.01



Replacement Parts:

1. Funnel 300 ml
2. Clamp 47 mm
3. Base 47 mm
4. Screen 47 mm
5. PTFE Gasket
6. Stopper No. 8

Filter holder with stainless steel screen filter
support, 262.202.01



VACUUM FILTERING FLASK

Ordering Information:

Cat No.	Description	Price /Piece
260.202.01	Glass filter holder assembly with funnel, fritted base, stopper, clamp, 47 mm	10245

Replacement Parts:

258.245.01	Glass funnel, 300 ml, borosilicate	4764
260.245.02	Base for 47 mm glass/filter holder	4732
258.245.02	Spring clamp, 47 mm, aluminum	3948
260.245.05	No. 8 perforated stopper, silicone	433

Cat No.	Description	Price /Piece
261.202.01	Glass filter holder assembly, PTFE-coated, with PTFE coated funnel and PTFE coated base, stopper no. 8 clamp 47 mm, Frit	13999

Replacement Parts: PTFE-faced Glass Filter Holder

261.245.01	Funnel, PTFE-faced, 300 ml	4004
258.245.02	Spring clamp, 47 mm, aluminum	3948
261.245.03	Glass base, PTFE-faced, 47 mm	6716
260.245.05	No. 8 perforated stopper, silicone	433

Cat No.	Description	Price /Piece
262.202.01	Glass filter holder with stainless steel screen, 47 mm	10025

Replacement Parts: Stainless Screen Glass Filter Holder

258.245.01	Glass funnel, 300 ml, borosilicate	4764
258.245.02	Spring clamp, 47 mm, aluminum	3948
262.245.03	Glass base, 47 mm	5656
262.245.04	Support screen, 47 mm, stainless steel	1005
262.245.05	Gasket, PTFE	121
260.245.05	No. 8 perforated stopper, silicone	433

Optional Accessories

074.202.04	Vacuum filtering flask, 1 Ltr	1093
074.202.05	Vacuum filtering flask, 2 Ltr	2179
260.245.08	Vacuum filtering flask, 4 Ltr	5347

VACUUM FILTERING FLASK HAS TO BE ORDER SEPARATELY

All-Glass Filter Holder

For 47 mm Disc Filters

Specifications:

Materials

258.202.01

Filter Diameter, mm

Filtration Area, cm²

Funnel Capacity, ml

Outlet Fitting


Borosilicate glass funnel, base and tubulated cap; anodized aluminum spring clamp; fritted glass filter support

47

9.6

Funnel: 300 ml; flask: 1 Lt

6 mm (1/4 in.) O.D. tubulated cap sidearm to vacuum

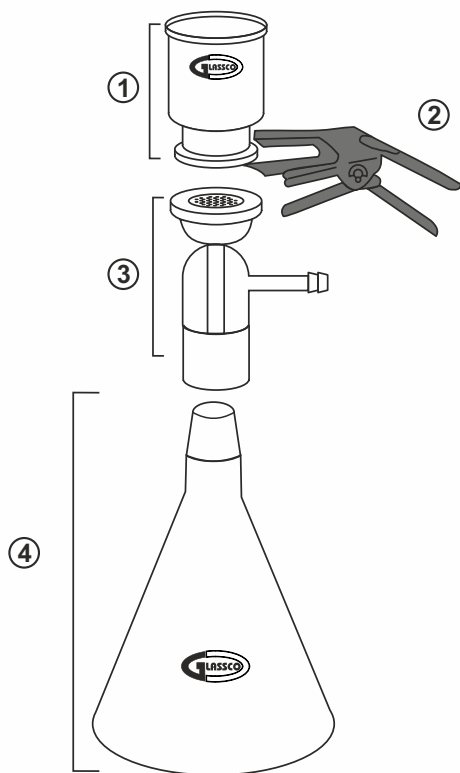

Ordering Information:

Cat No.	Description	Price /Piece
258.202.01	All-Glass Filter Holder Assembly with funnel, fritted-base & cap, clamp 47 mm, ground joint flask 1 Ltr.	18924

Cat No.	Description	Price /Piece
258.284.01	All-Glass Filter Holder Assembly with funnel, fritted-base & cap, clamp 47 mm, ground joint flask 2 Ltr.	24088

Replacement Parts

Cat No.	Description	Price /Piece
258.245.01	Glass funnel, 300 ml, Borosilicate	4764
258.245.02	Spring clamp, 47 mm, aluminum	3948
258.245.03	Glass Base & Cap, 47 mm	6475
258.245.04	Flask, 1000ml for Filter Holder	5322
258.245.04A	Flask, 2000ml for Filter Holder	11046

Optional Accessories:

Cat No.	Description	Price /Piece
263.245.06	Bottles Vacuum 2L	17226
263.245.07	Bottles Vacuum 5L	34624



263.245.07



263.245.06

Replacement Parts:

- 1 Funnel 300 ml
- 2 Clamp 47 mm
- 3 Vacuum Base 47 mm with Sintered Disc
- 4 Ground Joint Flask 1000 ml

Glass Microanalysis Filter Holders

For 25 mm Disc Filters

Applications :

- Used to filter under vacuum/small volumes for particulate or biological contamination analysis
- Available in fritted glass or stainless steel
- Thick prefilters or laminated filters will not seal in this holder
- Use Durapore (PVDF) membrane or unlaminated PTFE for solvent applications with this apparatus.

Specifications:

Materials

259.202.01	Borosilicate glass funnel and base; fritted glass filter support; anodized aluminum spring clamp; silicone stopper
259.202.03	Borosilicate glass funnel and base; removable stainless steel screen filter support; anodized aluminum spring clamp; silicone stopper
Filter Diameter, mm	25
Filtration Area, cm ²	2.5
Funnel Capacity, ml	15
Outlet Fitting flask	No. 5 perforated silicone stopper mounts in standard 125 ml filtering flask
Dimensions	
Height, cm	15.2
Diameter, cm	2.5

Ordering Information:

Cat No.	Description	Price /Piece
259.202.01	Microanalysis Filter Holder, 25 mm, fritted glass support with Flask	8982

Replacement Parts

259.245.01	Funnel, 15 ml, borosilicate glass	2214
259.245.02	Fritted Glass Base with stopper, 25 mm	4908
259.245.03	Spring Clamp, 25 mm, aluminum	2724
259.245.06	No. 5 perforated stopper, silicone	348

Cat No.	Description	Price /Piece
259.202.03	Microanalysis Filter Holder, 25 mm, stainless steel support with Flask	8280



Replacement Parts

259.245.01	Funnel, 15 ml, borosilicate glass	2214
259.245.03	Spring Clamp, 25 mm, aluminum	2724
259.245.05	Base stopper & stainless steel screen	2666
259.245.06	No. 5 perforated stopper, silicone	348
259.245.07	Gaskets, Teflon	122
259.245.08	Support Screen, 25 mm, stainless steel	891

Optional Accessories

259.245.04	Vacuum filtering flask, 125 ml	3588
------------	--------------------------------	------

VACUUM FILTERING FLASK HAS TO BE ORDER SEPARATELY

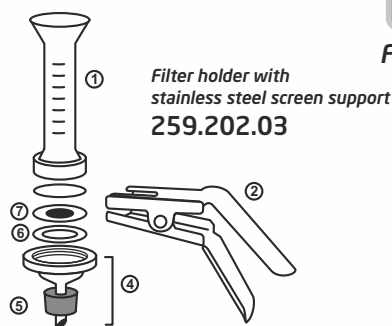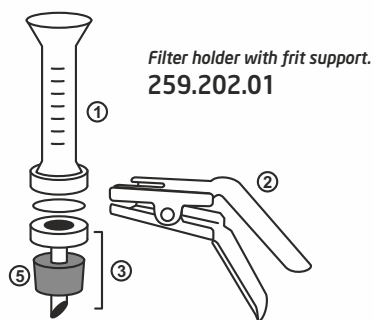

All-Glass Filter Holder

(90 mm)

Applications :

- Used in vacuum filter aqueous, organic or corrosive liquids for particulate contamination analysis
- Recommended for HPLC solvent filtration.

Specifications:

Materials	Borosilicate glass funnel, base and tubulated cap; PTFE-coated stainless steel screen; anodized aluminum spring clamp
Filter Diameter, mm	90
Funnel Capacity, L	1
Outlet Fitting	6 mm (1/4 in.) O.D. tubulated cap sidearm to vacuum



Ordering Information:

Cat. No.	Description	Price /Piece
263.202.01	Glass Filter Holder with stainless steel screen, 90 mm	31746

Replacement Parts

Cat. No.	Description	Price /Piece
263.245.01	Funnel, 1L, 90 mm, ground glass seal	14986
263.245.02	Vacuum Base and Cap, 90 mm	11748
263.245.03	Stainless Steel Screen, PTFE coated, 90 mm	6336
263.245.04	Gasket, PTFE 90 mm	198
263.245.05	Spring Clamp, 90 mm anodized aluminum	5411

Optional Accessories

Cat. No.	Description	Price /Piece
258.245.04	Ground Joint Flask, 1 L	5322
263.245.06	Bottle Vacuum 2 L	17226
263.245.07	Bottle Vacuum 5 L	34624
258.245.09	Ground Joint Flask 5 L	10028



258.245.04



263.245.07

Vacuum Pump



Salient Features:

- Valves made of SS 316 material Built-in micro suction filter
- All parts made from special graded Aluminum die cast material for light weight and good strength
- Totally oil-free construction
- No lubricant required
- Diaphragms are made of special 2-ply nylon reinforced neoprene rubber.
- Noiseless performance
- Extra large bearings for trouble-free and smooth running.
- Absolutely portable
- Practically maintenance –free



Buy Now!

Item Code	Volt	Hz	Price /Piece
970.DNEU.01	230	50	31500

Technical Specification :

Material	Aluminum Die Cast
Vacuum	22" Hg
Flow	15 (Ltrs/Min)
Pressure	25 Psig
Connection	10 mm Hose
Weight	2.5 Kg
Motor	1/20 hp
Dimension	150x110x140

Vacuum Filtration Manifold



Vacuum Filtration Manifold is an integrated filtration system having a prime application in filtering multiple samples off one vacuum source. It is without filter holders. It is perfectly supported on stainless steel manifold with rugged side supports which keeps the system rigid and firm even while fully loaded. Holder equipped with a funnel SS lid, which can be vented using accessory filter unit. Can be autoclaved or flame-sterilised.

Item Code	Volt	Hz	Price /Piece
252.202.01	230	50	52800

Vacuum Filter Holders and Filtration Accessories for use in :

- Use For filtration of chromatography mobile phases and particulate contamination analysis.
- For vacuum filtration of aqueous, organic or corrosive liquids.
- Useful for Bacteriological or Particulate Contamination Analysis

Technical Specification :

Material	Stainless Steel SS316
Valve Type	PTFE
Line Type	2 Way
Out Let	8x13 Hose
Available Range	3 Branch
Polish	Mirror
Connector	1/2" Hose (12mm)
Filter Type	47mm
Autoclave	121°C (15 Min)
Seal	Silicone
Cork Size	Cork No. 8
Capacity	300 ml
Effective Filtration Area	13.5 Cm ²

Also available in :

**6 Station Vacuum
Filtration Manifold**

Flasks



Buy Now!

Flask, Clear, Conical, Graduated, (Erlenmeyer) Narrow Mouth

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ISO 1773
- Has Reinforced thick Rim to reduce chipping & breakage

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
231.202.01	25	42	22	75	10	112
231.202.02	50	51	22	90	10	112
231.202.03	100	64	22	105	10	117
231.202.03A*	150	74	28	118	10	143
231.202.04	250	85	34	145	10	176
231.202.05	500	105	34	180	10	252
231.202.06	1000	131	42	220	10	427
231.202.07	2000	166	50	280	6	743
231.202.08	3000	187	50	310	1	2124
231.202.09	5000	220	50	365	1	3288

*Non DIN



Buy Now!

Flask, Amber, Conical, Graduated, (Erlenmeyer) Narrow Mouth

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ISO 1773
- Has Reinforced thick Rim to reduce chipping & breakage

Item Code	Capacity (ml)	Body dia (mm)	Tube dia (mm)	Height (mm)	Pack of	Price /Piece
231.519.03	100	64	22	105	10	222
231.519.03A*	150	74	28	118	10	260
231.519.04	250	85	34	145	10	351
231.519.05	500	105	34	180	10	557
231.519.06	1000	131	42	220	10	940

*Non DIN



Buy Now!

Flask, Graduated, Erlenmeyer, Narrow Mouth

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- These flasks are made from thick wall and have reinforced thick beaded rim
- The flasks are produced to meet ASTM E-1404, TYPE-1 specifications
- All the flasks are printed in white enamel

Item Code	Capacity (ml)	Sub Division (ml)	Graduation Range	Rubber Stopper Size	Pack of	Price / Piece
231.402.01	25	5	10-25	0	12	116
231.402.02	50	10	20-50	1	12	116
231.402.03A	125	25	50-125	5	12	138
231.402.04	250	25	50-225	6	12	165
231.402.04A	300	25	100-300	6	12	182
231.402.05	500	50	100-500	7	6	242
231.402.06	1000	50	250-1000	9	6	396
231.402.07	2000	100	600-2000	10	4	677
231.402.08A	4000	250	1000-4000	10	1	1892
231.402.09	6000	500	1500-6000	10	1	3003

Flask, Heavy, Conical (Erlenmeyer) Narrow Mouth

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ISO 1773
- All the flasks are printed in white enamel
- Has Reinforced thick Rim to reduce chipping & breakage

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
231.237.01	25	42	22	75	10	160
231.237.02	50	51	22	90	10	171
231.237.03	100	64	22	105	10	209
231.237.03A*	150	74	28	118	10	220
231.237.05	250	85	34	145	10	292
231.237.07	500	105	34	180	10	440
231.237.08	1000	131	42	220	10	880
231.237.09	2000	166	50	280	6	1271
231.237.10	3000	187	50	310	1	2123
231.237.12	5000	220	50	365	1	3278

* Non DIN



Buy Now!



Flask, Conical (Erlenmeyer) Wide Mouth

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Compliance with ISO 24450
- All the flasks are printed in white enamel
- Has Reinforced thick Rim to reduce chipping & breakage

Item Code	Capacity (ml)	Body dia (mm)	Tube dia (mm)	Height (mm)	Pack of	Price /Piece
232.202.01*	25	42	31	70	10	113
232.202.02	50	51	34	85	10	116
232.202.03	100	64	34	105	10	138
232.202.05	250	85	50	140	10	186
232.202.07	500	105	50	175	10	290
232.202.08	1000	131	50	220	10	509
232.202.09*	2000	166	72	276	6	809

* Non DIN



Buy Now!






Buy Now!

Flask, Filter

- With Glass Connector
- Made from heavy wall which can withstand high vacuum
- Printed in white colour enamel without Graduation

Item Code	Capacity (ml)	Pack of	Price /Piece
074.202.00	50	2	270
074.202.01	100	2	403
074.202.02	250	2	592
074.202.03	500	2	707
074.202.04	1000	2	1093
074.202.05	2000	1	2179
074.202.08	5000	1	7924

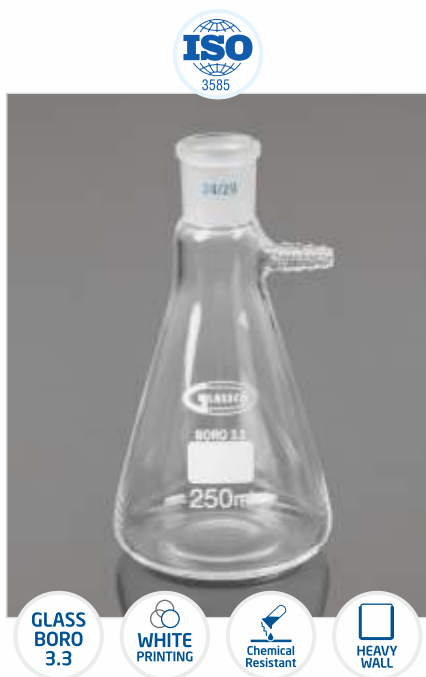

Buy Now!

Flask, Buchner, plain side arm and ground socket

- Complies with DIN ISO 3585
- Buchner filter flasks with precision-ground quick fit socket
- With traditional plain glass side-arm to accept 9mm bore vacuum tubing
- Heavy wall and base construction for vacuum work

Item Code	Capacity (ml)	Socket Size	Height (mm)	Approx Dia (mm)	Pack of	Price / Piece
074.205.01B	100	19/26	107	70	2	449
074.205.01C	100	24/29	107	70	2	449
074.205.02	250	24/29	158	85	2	627
074.205.02A	250	29/32	158	85	2	627
074.205.03	500	24/29	188	105	2	719
074.205.03A	500	29/32	188	105	2	719
074.205.04	1000	24/29	238	138	2	2099
074.205.04A	1000	29/32	238	138	2	2099

Flask, Conical, With Joint

- Complies with ISO 4797
- Ideal for mixing liquids

Item Code	Capacity (ml)	Socket Size	Overall Height	Overall Dia (mm)	Pack of	Price /Piece
071.202.06	25	14/23	70	42	10	210
071.202.07	25	19/26	70	42	10	234
071.202.08	50	14/23	85	51	10	216
071.202.09	50	19/26	85	51	10	216
071.202.10*	50	24/29	85	51	10	216
071.202.10A*	50	29/32	85	51	10	264
071.202.11	100	14/23	100	64	10	246
071.202.12	100	19/26	100	64	10	246
071.202.13	100	24/29	100	64	10	246
071.202.14	100	29/32	100	64	10	312
071.202.15*	150	19/26	118	72	10	276
071.202.16*	150	24/29	118	72	10	276
071.202.17*	150	29/32	118	72	10	276
071.202.17A*	200	29/32	131	79	10	276
071.202.18	250	19/26	140	85	10	276
071.202.19	250	24/29	140	85	10	276
071.202.20	250	29/32	140	85	10	342
071.202.21A*	300	29/32	156	87	10	342
071.202.22	500	19/26	175	105	10	390
071.202.22A	500	24/29	175	105	10	390
071.202.23	500	29/32	175	105	10	390
071.202.25	1000	24/29	220	131	10	726
071.202.26	1000	29/32	220	131	10	726
071.202.27	1000	34/35	220	131	10	780
071.202.28	2000	29/32	270	166	6	1056
071.202.29	2000	34/35	270	166	6	1056
071.202.30	3000	45/40	310	187	1	2580
071.202.31	5000	45/40	365	220	1	2580

* Non Din



Flask, Iodine

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Determination of Iodine with ground joint and stopper

Item Code	Capacity (ml)	Joint Size	Pack of	Price / Piece
072.202.01	250	24/29	2	388
072.202.02	250	29/32	2	394
072.202.03	500	24/29	2	481
072.202.04	500	29/32	2	463





Buy Now!

Flask, Erlenmeyer with Joint

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- These Flasks comes with Ground Joint & manufactured as per ASTM E-1404, Type 2, Class-1 requirement
- The Flasks are printed in white colour enamel

Item Code	Capacity (ml)	Joint Size	Pack of	Price / Piece
071.470.04*	10	14/20	2	222
071.470.06*	25	14/20	2	222
071.470.09*	50	14/20	2	234
071.202.50	50	19/38	2	234
071.470.10A*	50	24/40	2	246
071.470.51A*	125	19/22	2	264
071.202.51	125	24/40	2	264
071.202.52	250	24/40	2	288
071.202.52A*	300	24/40	2	318
071.202.53	500	24/40	2	408
071.202.54	1000	24/40	1	774
071.202.55	2000	24/40	1	1104

* Non ASTM Standard



Buy Now!

Flask, Conical

- Made from DIN ISO 3585, Boro 3.3 heat resistance glass
- Compliance with ISO 4797
- With Ground Joint
- Supplied with Penny Head Glass stopper

Item Code	Capacity (ml)	Neck Size	Dia (mm)	Height (mm)	Pack of	Price / Piece
076.276.01	25	14/23	42	70	2	259
076.276.02	50	19/26	51	85	2	308
076.276.01A	100	24/29	64	100	2	350
076.276.03	100	29/32	64	100	2	350
076.276.04B	250	29/32	85	140	2	390
076.276.05	500	24/29	105	175	2	549
076.276.05B	500	29/32	105	175	2	544
076.276.06	1000	29/32	131	220	2	823
076.276.07	2000	29/32	166	270	1	1102

Flask, Erlenmeyer, with Screw Cap

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- The screw cap is made from Polyethylene which is Autoclavable
- Comes with PTFE Liner.

Item Code	Capacity (ml)	Thread Size	Dia (mm)	Pack of	Price / Piece
075.202.01	50	GL 25	51	2	305
075.202.02	100	GL 25	64	2	328
075.202.03	150	GL 25	72	2	374
075.207.04	250	GL 45	85	2	431
075.207.05	500	GL 45	105	2	552
075.207.06	1000	GL 45	131	2	1050
075.207.07	2000	GL 45	166	2	1505
075.207.10	5000	GL 45	220	2	7068



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Flask, Erlenmeyer, Conical, Narrow Mouth

- Compliance with ISO 4797
- Made From Heat Resistant
- With Interchangeable Stopper
- Suitable for mixing of liquids
- The Amber colour is applied only to the external surface to prevent contamination with the testing material
- These flasks can be closed with a glass stopper
- Coloured in Amber to protect light-sensitive material

Item Code	Capacity (ml)	Interchangeable Joint	Pack of	Price / Piece
076.502.00	25	14/23	2	412
076.502.01	50	19/26	2	423
076.502.02	100	24/29	2	516
076.502.03	250	24/29	2	640
076.502.04	500	24/29	2	1051



Buy Now!



ISO
4797



Flask, Culture, Baffled, Heavy Wall, with Membrane Cap

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Ideal for Use of in preparation of culture
- The four equidistant baffles provide consistent agitation when used with compatible orbital shakers
- Suitable for repeated autoclave cycles at 121°C



Buy Now!

Item Code	Capacity (ml)	Bulb Dia. (mm)	Height (mm)	Thread GL Size (mm)	Pack of	Price / Piece
075.212.04	250	85	145	45	2	2481
075.212.05	500	105	180	45	2	2760
075.212.06	1000	131	220	45	2	3900
075.212.07	2000	166	280	45	1	4860



Flask, Culture, Haffkine

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Used for Preparation of Culture in Nutrient Media
- Suitable for use in Polenske Apparatus
- Complies with IS 7183 Standard



Buy Now!

Item Code	Capacity (ml)	Approx O.D x Height	Pack of	Price /Piece
235.207.07	3000*	245 x 280	1	3900
235.207.08	4000	246 x 310	1	4336

*3000 ml not covered in standards

Flask, Distillation

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ASTM E-133, ASTM D-86, D-233, D-801, D 802 & E 1405

Item Code	Capacity (ml)	Dia. (mm)	Height (mm)	Side Dia. (mm)	Arm Length	Pack of	Price / Piece
073.202.03*	100	65	215	7	100	2	356
073.205.01	125	68	215	7	100	2	356
073.202.04	250	85	226	9	130	2	575
073.202.05*	500	105	240	9	130	2	688

* Non ASTM



Buy Now!



Flask, Distillation

- Complies with **ASTM D-86** Standard
- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- With 19/26 Joint

Item Code	Capacity (ml)	Dia. (mm)	Height (mm)	Side Dia. (mm)	Arm Length	Pack of	Price / Piece
073.206.01	125	68	215	8	100	2	558



Buy Now!



Flask, Evaporating

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Used in Rotary Evaporator



Buy Now!

Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Pack of	Price /Piece
069.502.01	50	29/32	95	2	1299
069.502.02	100	24/29	110	2	1911
069.502.03	100	29/32	110	2	2033
069.502.04	250	24/29	135	2	2848
069.502.05	250	29/32	135	2	3023
069.502.06	500	24/29	160	2	3291
069.502.07	500	29/32	160	2	3425
069.502.08	1000	24/29	190	2	5749
069.502.09	1000	29/32	190	2	5953
069.502.10	2000	29/32	235	1	7753

GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Flask, Conical

- Made of Polypropylene
- Are Rigid, Translucent & Autoclavable
- Screw cap keeps the contents of flask contamination Free and leakproof



Buy Now!

Item Code	Capacity (ml)	Pack of	Price /Pack
111.303.01	100	12	945
111.303.02	250	12	1141
111.303.03	500	12	1873

Threads should be disengaged before autoclaving.



Threads should be disengaged before autoclaving.

Screw
Cap

5
PP

121°C
SSSS

Leakproof

Flask, Flat Bottom, Narrow Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- With beaded rim
- Complies with DIN/ISO 1773

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
235.202.01	50	51	26	90	10	137
235.202.02	100	64	26	105	10	147
235.204.02*	150	74	28	115	10	165
235.202.03	250	85	34	138	10	176
235.204.03*	300	93	34	143	10	254
235.202.04	500	105	34	163	10	290
235.202.05	1000	131	42	190	10	446
235.202.06	2000	166	50	230	6	853
235.202.07*	3000	185	50	250	1	2429
235.202.08*	5000	233	50	290	1	3527
235.202.09	10000	280	65	360	1	8297
235.202.10*	20000	350	75	495	1	13813

* Non DIN



Buy Now!



Flask, Flat Bottom, Wide Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- With beaded rim
- Complies with DIN/ISO 24450

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
236.202.01	50	51	34	90	10	138
236.202.02	100	64	34	105	10	150
236.202.03	250	85	50	138	10	167
236.202.04	500	105	50	163	10	282
236.202.05	1000	131	50	190	10	385
236.202.06	2000	166	76	230	6	794



Buy Now!



Flask, Boiling, Flat Bottom, with Joint

- Complies with DIN / ISO 4797 and USP standard



Buy Now!

Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Dia (mm)	Pack of	Price / Piece
058.202.00*	50	14/23	85	51	10	228
058.202.01	50	19/26	85	51	10	228
058.202.02*	50	24/29	85	51	10	228
058.202.02A	50	29/32	85	51	10	228
058.202.03B*	100	14/23	103	64	10	228
058.202.03	100	19/26	103	64	10	228
058.202.04*	100	24/29	103	64	10	228
058.202.05	100	29/32	103	64	10	228
058.202.07*	150	19/26	115	74	10	228
058.202.08*	150	24/29	115	74	10	270
058.202.09*	150	29/32	115	74	10	270
058.202.11A*	250	14/23	130	85	10	270
058.202.11	250	19/26	130	85	10	270
058.202.12*	250	24/29	130	85	10	270
058.202.13	250	29/32	130	85	10	270
058.202.14*	250	34/35	130	85	10	270
058.202.15*	500	19/26	160	105	10	414
058.202.16*	500	24/29	160	105	10	414
058.202.17	500	29/32	160	105	10	414
058.202.18*	500	34/35	160	105	10	414
058.202.19A*	1000	19/26	187	131	10	414
058.202.19*	1000	24/29	187	131	10	558
058.202.20	1000	29/32	187	131	10	558
058.202.21*	1000	34/35	187	131	10	558
058.202.22*	2000	24/29	230	166	6	1002
058.202.23	2000	29/32	230	166	6	1002
058.202.24*	2000	34/35	230	166	6	1002
058.202.25*	3000	29/32	250	185	1	2708
058.202.25A*	3000	34/35	250	185	1	2708
058.202.25B*	3000	45/40	250	185	1	2826
058.202.26B*	5000	29/32	290	223	1	4306
058.202.26A*	5000	34/35	290	223	1	4306
058.202.26*	5000	45/40	290	223	1	4614

* Non DIN

PS : These flasks can also be provided in other joint sizes

Flask, Boiling, Flat Bottom with Joint

- These Flasks comes with Ground Joint manufactured as per
- ASTM E-1403 type 1 specifications.
- The Flasks are printed in white colour enamel



Buy Now!

Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Dia (mm)	Pack of	Price / Piece
058.202.56	50	24/40	95	51	2	234
058.202.58	100	24/40	110	64	2	234
058.202.58A	125	24/40	110	69	2	240
058.202.58C	200	24/40	123	75	2	294
058.202.59	250	24/40	130	85	2	294
058.202.59A	300	24/40	140	88	2	294
058.202.60	500	24/40	160	105	2	426
058.470.23	1000	29/42	178	131	1	564
058.202.61	1000	24/40	205	131	1	564
058.202.62	2000	24/40	178	166	1	1062

Flask, Boiling, Round Bottom, Narrow Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ISO 1773
- With beaded rim

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
233.202.01	50	51	26	95	10	133
233.202.02	100	64	26	110	10	147
233.203.02*	150	74	28	118	10	166
233.202.03	250	85	34	143	10	166
233.202.04	500	105	34	168	10	288
233.202.05	1000	131	42	200	10	391
233.202.06	2000	166	50	240	6	864
233.202.07*	3000	185	50	260	1	2344
233.202.08*	5000	223	50	305	1	3514
233.202.09	10000	279	65	380	1	7340
233.202.10*	20000	350	75	510	1	13755

* Non DIN



Buy Now!



Flask, Boiling, Round Bottom, Wide Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with ISO 24450
- With beaded rim

Item Code	Capacity (ml)	Body Dia (mm)	Neck Dia (mm)	Height (mm)	Pack of	Price /Piece
234.202.01	50	51	34	95	10	144
234.202.02	100	64	34	110	10	171
234.202.03	250	85	50	143	10	192
234.202.04	500	105	50	168	10	305
234.202.05	1000	131	50	200	10	414
234.202.07	2000	166	76	240	6	932



Buy Now!





Buy Now!

Flask, Boiling, Round Bottom, Single Neck with Joint

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with DIN / ISO 4797 & USP standard


Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Dia (mm)	Pack of	Price / Piece
057.202.05	25	14/23	85	41	10	224
057.202.06*	25	19/26	85	41	10	228
057.202.07*	25	24/29	85	41	10	228
057.202.08	50	14/23	90	51	10	228
057.202.09	50	19/26	90	51	10	228
057.202.10	50	24/29	90	51	10	228
057.202.10A	50	29/32	90	51	10	228
057.202.11	100	14/23	105	64	10	228
057.202.12	100	19/26	105	64	10	228
057.202.13	100	24/29	105	64	10	228
057.202.14	100	29/32	105	64	10	228
057.202.16*	150	19/26	137	75	10	293
057.202.17*	150	24/29	137	75	10	293
057.202.18*	150	29/32	137	75	10	293
057.202.20*	250	14/23	140	85	10	293
057.202.21	250	19/26	140	85	10	293
057.202.22	250	24/29	140	85	10	293
057.202.23	250	29/32	140	85	10	293
057.202.24*	250	34/35	140	85	10	293
057.202.25*	500	19/26	163	105	10	404
057.202.26	500	24/29	163	105	10	404
057.202.27	500	29/32	163	105	10	404
057.202.28*	500	34/35	163	105	10	404
057.202.29*	1000	19/26	200	131	10	550
057.202.30	1000	24/29	200	131	10	550
057.202.31	1000	29/32	200	131	10	550
057.202.32*	1000	34/35	200	131	10	550
057.202.33	2000	24/29	240	165	6	1065
057.202.34	2000	29/32	240	165	6	1065
057.202.35*	2000	34/35	240	165	6	1065
057.202.36A*	3000	24/29	260	185	1	3001
057.202.36*	3000	29/32	260	185	1	3001
057.202.37*	3000	45/40	260	185	1	3001
057.202.40A*	5000	24/29	305	223	1	4545
057.202.40*	5000	29/32	305	223	1	4545
057.202.40B*	5000	34/35	305	223	1	4545
057.202.41*	5000	45/40	305	223	1	4545
057.202.44*	10000	29/32	380	279	1	9413
057.202.45A*	10000	34/35	380	279	1	9155
057.202.45	10000	45/40	380	279	1	9155
057.202.45B*	10000	55/44	380	279	1	9155
057.202.47B*	20000	55/44	435	345	1	16041

* Non DIN

Flask, Round Bottom, Single Neck with Joint

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- These Flasks comes with Ground Joint manufactured as per ASTM E-1403 type 1 specifications
- The Flasks are printed in white colour enamel

Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Dia (mm)	Pack of	Price / Piece
057.202.57	50	24/40	100	51	2	222
057.202.58	100	24/40	118	64	2	234
057.202.58A	200	24/40	128	75	2	293
057.202.59	250	24/40	140	85	2	293
057.202.59A	300	24/40	148	88	2	304
057.202.60	500	24/40	158	105	2	410
057.202.61	1000	24/40	185	130	1	550
057.202.62	2000	24/40	215	165	1	1053
057.470.55B	25	24/40	90	41	2	222
057.470.09	50	19/22	80	51	2	222
057.470.11	100	14/20	100	64	2	228
057.470.12	100	19/22	100	64	2	228
057.470.20	250	14/20	120	85	2	293
057.470.21	250	19/22	120	85	2	293
057.470.25	500	19/22	140	105	2	410
057.470.25A	500	14/20	140	105	2	410
057.470.53	10	14/20	59	31	2	222
057.470.53A	10	19/22	59	31	2	222
057.470.55	25	14/20	75	41	2	222
057.470.55A	25	19/22	75	41	2	222
057.470.52	5	14/20	46	25	2	222

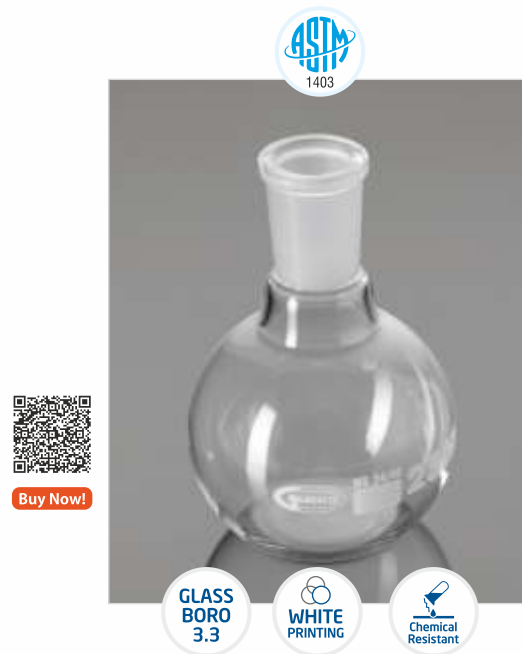

Flask, Round Bottom, 2 Neck Angular

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with DIN 12394 & USP standard
- Available with two neck angular

Item Code	Capacity (ml)	Socket Size	Side Socket	Approx. Overall Height (mm)	Pack of	Price / Piece
059.202.01*	50	24/29	14/23	92±2	1	312
059.202.02*	50	29/32	14/23	92±2	1	312
059.202.03*	100	24/29	14/23	107	1	336
059.202.04*	100	24/29	19/26	107	1	336
059.202.05*	100	29/32	14/23	107	1	336
059.202.06*	250	24/29	14/23	142	1	444
059.202.07*	250	24/29	19/26	142	1	444
059.202.08	250	29/32	14/23	142	1	444
059.202.09*	500	24/29	14/23	165±3	1	642
059.202.10*	500	24/29	19/26	165±3	1	642
059.202.11	500	29/32	14/23	165±3	1	642
059.202.12*	1000	24/29	14/23	203±	1	798
059.202.13*	1000	24/29	19/26	203±	1	798
059.202.14	1000	29/32	14/23	203±	1	798
059.202.15A*	2000	24/29	19/26	243	1	1428
059.202.15*	2000	34/35	19/26	243	1	1428
059.202.20*	3000	34/35	19/26	260±3	1	3800
059.202.20A*	3000	34/35	24/29	260±3	1	3703
059.202.24*	5000	34/35	19/26	305±4	1	5546
059.202.24A*	5000	34/35	24/29	305±4	1	5546
059.202.28*	10000	34/35	24/29	380±5	1	9977
059.202.29*	10000	55/44	24/29	380±5	1	9977
059.202.30*	20000	55/44	24/29	435±5	1	16780



PS : These flasks can also be provided in other joint sizes

* Non DIN



Buy Now!

Flask, Round Bottom, 2 Necks Angular

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Round bot tom flask with ASTM joint sizes
- Angular

Item Code	Capacity (ml)	Socket Size	Side Socket	Pack of	Price / Piece
059.470.00	50	14/20	14/20	1	319
059.470.00A	25	14/20	14/20	1	319
059.470.03	100	14/20	14/20	1	330
059.470.05A	100	24/40	24/40	1	330
059.470.08	250	24/40	24/40	1	425
059.470.10	500	24/40	24/40	1	608
059.470.15	1000	24/40	24/40	1	761



Buy Now!

Flask, Round Bottom, 2 Neck Parallel

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Complies with DIN 12394
- Has Two Neck Parallel

Item Code	Capacity (ml)	Socket Size	Side Socket	Approx. Overall Height (mm)	Pack of	Price / Piece
059.212.00	50	24/29	14/23	90	1	330
059.212.00A	50	29/32	14/23	90	1	330
059.212.01*	100	24/29	14/23	105	1	330
059.212.01A*	100	24/29	19/26	105	1	330
059.212.01B*	100	29/32	14/23	105	1	330
059.212.02*	250	24/29	14/23	140	1	443
059.212.02A*	250	24/29	19/26	140	1	443
059.212.02B	250	29/32	14/23	140	1	443
059.212.03*	500	24/29	14/23	163	1	640
059.212.03A*	500	24/29	19/26	163	1	640
059.212.03B	500	29.32	14/23	163	1	640
059.212.04*	1000	24/29	14/23	200	1	785
059.212.04A*	1000	24/29	19/26	200	1	799
059.212.04B	1000	29/32	14/23	200	1	799
059.212.05*	2000	24/29	19/26	240	1	1412
059.212.05A*	2000	34/35	19/26	240	1	1412
059.212.06*	3000	34/35	19/26	260	1	3797
059.212.06A*	3000	34/35	24/29	260	1	3797
059.212.07*	5000	34/35	19/26	305	1	5597
059.212.07A*	5000	34/35	24/29	305	1	5597
059.212.08*	10000	34/35	24/29	380	1	10065
059.212.08A*	10000	55/44	24/29	380	1	10065
059.212.09*	20000	55/44	24/29	435	1	16776

* Non DIN

Flask, Round Bottom, 3 Necks Angular

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Available with three neck angular
- Complies with DIN 12394

Item Code	Capacity (ml)	Centre Size	Side Socket	Approx. Overall Height (mm)	Pack of	Price / Piece
060.202.01*	100	19/26	14/23	105	1	468
060.202.02*	100	24/29	14/23	105	1	468
060.202.03*	100	24/29	19/26	105	1	468
060.202.02A*	100	14/23	14/23	105	1	468
060.202.03A*	100	29/32	14/23	105	1	468
060.202.04*	250	19/26	19/26	140	1	594
060.202.04A*	250	19/26	14/23	140	1	594
060.202.05*	250	24/29	14/23	140	1	594
060.202.06*	250	24/29	19/26	140	1	594
060.202.07	250	29/32	14/23	140	1	594
060.202.08	250	29/32	19/26	140	1	594
060.202.08A*	250	29/32	29/32	140	1	594
060.202.09*	500	24/29	14/23	163	1	894
060.202.10*	500	24/29	19/26	163	1	894
060.202.11	500	29/32	14/23	163	1	894
060.202.12	500	29/32	19/26	163	1	894
060.202.12A*	500	29/32	29/32	163	1	894
060.202.13*	1000	24/29	14/23	200	1	1104
060.202.14*	1000	24/29	19/26	200	1	1104
060.202.15	1000	29/32	14/23	200	1	1104
060.202.16	1000	29/32	19/26	200	1	1104
060.202.17*	1000	29/32	29/32	200	1	1104
060.202.18*	2000	24/29	19/26	240	1	1986
060.202.19*	2000	29/32	24/29	240	1	1986
060.202.20*	2000	29/32	29/32	240	1	1986
060.202.26*	3000	34/35	19/26	260	1	4837
060.202.26A*	3000	34/35	24/29	260	1	4837
060.202.29B*	5000	34/35	19/26	305	1	6664
060.202.29*	5000	34/35	24/29	305	1	6664
060.202.32*	10000	34/35	24/29	380	1	13195
060.202.33*	10000	45/40	24/29	380	1	13195
060.202.34*	20000	55/44	24/29	435	1	19668

* Non DIN

ASTM Sizes

Item Code	Capacity (ml)	Socket Size	Side Socket	Pack of	Price /Piece
060.470.00	25	14/20	14/20	1	365
060.470.00A	50	14/20	14/20	1	377
060.470.01	100	14/20	14/20	1	441
060.470.01A	100	19/22	19/22	1	441
060.470.03	100	24/40	19/22	1	441
060.470.03A	100	24/40	24/40	1	441
060.470.04	250	14/20	14/20	1	568
060.470.04A	250	19/22	19/22	1	568
060.470.08A	250	24/40	24/40	1	568
060.470.09	500	24/40	24/40	1	824
060.470.10	500	19/22	19/22	1	824
060.470.19	1000	24/40	24/40	1	1021



Buy Now!



Buy Now!

Flask, Round Bottom, 3 Neck Parallel

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Available Three Neck Parallel

Item Code	Capacity (ml)	Centre Size	Side Socket	Approx. Overall Height (mm)	Pack of	Price / Piece
061.202.00A*	100	19/26	14/23	105	1	474
061.202.00*	100	14/23	14/23	105	1	454
061.202.00B*	100	24/29	14/23	105	1	474
061.202.00C*	100	24/29	19/26	105	1	474
061.202.01*	250	24/29	19/26	140	1	594
061.202.01A*	250	19/26	19/26	140	1	594
061.202.02*	250	29/32	14/23	140	1	594
061.202.02A*	250	29/32	29/32	140	1	594
061.202.03*	500	24/29	19/26	163	1	894
061.202.03A*	500	19/26	19/26	163	1	894
061.202.04*	500	29/32	14/23	163	1	894
061.202.05	500	29/32	19/26	163	1	894
061.202.05A	500	29/32	29/32	163	1	894
061.202.06*	1000	24/29	19/26	200	1	1098
061.202.07*	1000	29/32	14/23	200	1	1098
061.202.08*	1000	29/32	19/26	200	1	1098
061.202.09*	1000	29/32	24/29	200	1	1098
061.202.10	1000	29/32	29/32	200	1	1098
061.202.11*	2000	24/29	19/26	240	1	1998
061.202.12*	2000	29/32	19/26	240	1	1998
061.202.13	2000	29/32	29/32	240	1	1998
061.202.14*	2000	34/35	19/26	240	1	1998
061.202.15*	2000	34/35	24/29	240	1	1998
061.202.17*	3000	34/35	24/29	260	1	4873
061.202.18*	3000	34/35	19/26	260	1	4873
061.202.19A*	5000	34/35	19/26	305	1	6722
061.202.19*	5000	34/35	24/29	305	1	6722
061.202.26*	10000	34/35	24/29	380	1	13309
061.202.26A*	10000	45/40	24/29	380	1	13309
061.202.27*	20000	55/44	24/29	435	1	19820

PS : All 2 Neck and 3 Neck Flasks can be provided in ASTM joint sizes on request

* Non DIN

ASTM Sizes

Item Code	Capacity (ml)	Socket Size	Side Socket	Pack of	Price /Piece
061.470.00	100	14/20	14/20	1	445
061.470.00A	100	24/40	24/40	1	445
061.402.06	250	24/40	24/40	1	567
061.402.09	500	24/40	24/40	1	831
061.470.05A	500	29/42	29/42	1	831
061.402.12	1000	24/40	24/40	1	1030
061.470.10	1000	29/42	29/42	1	1030
061.402.15	2000	24/40	24/40	1	1849



Buy Now!

These flasks can also be provided in other joint sizes

Flask, Round Bottom, Four Necks Angular

- Complies with DIN 12392
- Centre Neck & Three Angled Side Necks
- With Interchangeable Joints
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass.

Item Code	Capacity (ml)	Interchangeable		Pack of	Price / Piece
		Centre Neck	Side Neck		
060.240.00*	50	24/29	24/29	1	672
060.240.01*	100	19/26	14/23	1	750
060.240.02*	100	24/29	14/23	1	750
060.240.02A*	100	14/23	14/23	1	750
060.240.03*	100	24/29	19/26	1	750
060.240.03A*	100	29/32	14/23	1	750
060.240.04*	250	19/26	19/26	1	924
060.240.04A*	250	19/26	14/23	1	924
060.240.05*	250	24/29	14/23	1	924
060.240.06*	250	24/29	19/26	1	924
060.240.07*	250	29/32	14/23	1	924
060.240.08	250	29/32	19/26	1	924
060.240.08A*	250	29/32	29/32	1	924
060.240.09*	500	24/29	14/23	1	1308
060.240.10*	500	24/29	19/26	1	1308
060.240.10A*	500	24/29	24/29	1	1308
060.240.11*	500	29/32	14/23	1	1308
060.240.12	500	29/32	19/26	1	1308
060.240.12A	500	29/32	29/32	1	1308
060.240.12B*	500	34/35	24/29	1	1308
060.240.13*	1000	24/29	14/23	1	1572
060.240.14*	1000	24/29	19/26	1	1626
060.240.14A*	1000	24/29	24/29	1	1626
060.240.15*	1000	29/32	14/23	1	1626
060.240.16*	1000	29/32	19/26	1	1626
060.240.17	1000	29/32	29/32	1	1626
060.240.17A*	1000	34/35	24/29	1	1626
060.240.18*	2000	24/29	19/26	1	2700
060.240.18A*	2000	24/29	14/23	1	2700
060.240.19*	2000	29/32	24/29	1	2700
060.240.20	2000	29/32	29/32	1	2700
060.240.20A*	2000	34/35	19/26	1	2700
060.240.20B*	2000	34/35	24/29	1	2700
060.240.26*	3000	34/35	19/26	1	6119
060.240.26A*	3000	34/35	24/29	1	6119
060.240.29*	5000	34/35	24/29	1	8412
060.240.29B*	5000	34/35	19/26	1	8412
060.240.32*	10000	34/35	24/29	1	15005
060.240.33*	10000	45/40	24/29	1	15005
060.240.33A*	10000	55/44	24/29	1	15005
060.240.34*	20000	55/44	24/29	1	22142



Buy Now!

PS : All 4 Neck Flasks can be provided in ASTM joint sizes on request

These flasks can also be provided in other joint sizes

* Non DIN

Flask, Round Bottom, Four Necks Parallel

- Complies with DIN 12392
- Centre Neck and Three Parallel Side Neck
- With Interchangeable Joints
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass



Buy Now!

Item Code	Capacity (ml)	Interchangeable		Pack of	Price / Piece
		Centre Neck	Side Neck		
061.240.00*	50	24/29	24/29	1	654
061.240.00B*	100	24/29	14/23	1	737
061.240.00BA*	100	24/29	19/26	1	737
061.240.01*	250	24/29	19/26	1	895
061.240.01A*	250	19/26	19/26	1	895
061.240.01B*	250	24/29	14/23	1	895
061.240.02*	250	29/32	14/23	1	895
061.240.02A*	250	29/32	29/32	1	895
061.240.03*	500	24/29	19/26	1	1275
061.240.03A*	500	19/26	19/26	1	1275
061.240.03B*	500	24/29	24/29	1	1275
061.240.03C*	500	24/29	14/23	1	1275
061.240.04*	500	29/32	14/23	1	1275
061.240.05	500	29/32	19/26	1	1275
061.240.05A	500	29/32	29/32	1	1275
061.240.05B*	500	34/35	24/29	1	1275
061.240.06*	1000	24/29	19/26	1	1556
061.240.06A*	1000	24/29	14/23	1	1556
061.240.06B*	1000	24/29	24/29	1	1556
061.240.07*	1000	29/32	14/23	1	1556
061.240.08*	1000	29/32	19/26	1	1556
061.240.09*	1000	29/32	24/29	1	1556
061.240.10	1000	29/32	29/32	1	1556
061.240.10A*	1000	34/35	24/29	1	1556
061.240.10B*	1000	45/40	29/32	1	1556
061.240.11*	2000	24/29	19/26	1	2638
061.240.11A*	2000	24/29	14/23	1	2638
061.240.12*	2000	29/32	19/26	1	2638
061.240.13	2000	29/32	29/32	1	2638
061.240.14*	2000	34/35	19/26	1	2638
061.240.15*	2000	34/35	24/29	1	2638
061.240.15B*	2000	45/40	29/32	1	2638
061.240.16B*	3000	29/32	29/32	1	6090
061.240.17*	3000	34/35	19/26	1	6090
061.240.18*	3000	34/35	24/29	1	6090
061.240.18B*	3000	45/40	29/32	1	6090
061.240.19A*	5000	34/35	19/26	1	8412
061.240.19*	5000	34/35	24/29	1	8412
061.240.26*	10000	34/35	24/29	1	14730
061.240.26A*	10000	45/40	24/29	1	14730
061.240.26B*	10000	55/44	24/29	1	14730
061.240.27*	20000	55/44	24/29	1	21961

PS : All 4 Neck Flasks can be provided in ASTM joint sizes on request

* Non DIN

Flask, (Vessels) Reaction

- Wide Mouth
- With Flat Flange, 100 mm ID, 150 mm OD
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass

Item Code	Capacity (ml)	Approx. Height (mm)	Pack of	Price / Piece
078.202.01	1000	170	1	2082
078.202.02	2000	205	1	2878
078.202.04	5000	260	1	6254
078.202.05	10000	335	1	13194
078.202.06	20000	400	1	22713



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Lids, For Flasks Reaction

- Flat Flange and Interchangeable Joint
- Made From Heat Resistant, Low Expansion 3.3 Borosilicate Glass

Item Code	Centre	Parellel	Interchangeable Joint Size			Pack of	Price / Piece
			Side 5°	Side 10°	Side 15°		
079.202.01	19/26	19/26	24/29	19/26	-	1	4947
079.202.02	19/26	14/23	14/23	14/23	29/32	1	4947
079.202.03	29/32	14/23	14/23	14/23	29/32	1	4947



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant


Flask, Stainless steel clips for reaction Flask

- With wing nuts holding 100mm flat flangs.

Item Code	Dia (mm)	Price / Piece
080.202.01	100	2277



Buy Now!





Flask, Pear shape

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Used for Semi Micro Distillation Manufactured
- Complies with DIN 12383



Buy Now!

Item Code	Capacity (ml)	Socket Size	Approx. Dia (mm)	Approx. Overall Height (mm)	Pack of	Price / Piece
062.202.06*	25	14/23	42	90	10	234
062.202.07	50	14/23	51	100	10	258
062.202.09	100	14/23	64	130	10	324

* Non DIN



Flask, Pear shape with Two Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Side neck at an angle of 25°



Buy Now!

Item Code	Capacity (ml)	Centre Size	Side Socket	Approx. Overall Height (mm)	Pack of	Price / Piece
063.202.01	50	14/23	14/23	100	1	564
063.202.02	100	14/23	14/23	130	1	600

Flask Pear Shape Single Neck

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Compliance with ASTM E-1403 Standard

Item Code	Capacity (ml)	Socket Size	Pack of	Price / Piece
062.470.06	25	14/20	1	240
062.470.07	50	14/20	1	264
062.470.07A	50	24/40	1	264
062.470.09	100	14/20	1	348
062.470.11	100	24/40	1	348
062.470.12	200	14/20	1	432



Buy Now!



Flask Reaction, With Glass Stopcock

With 2mm glass stopcock

Item Code	Capacity (ml)	Socket Size	Pack of	Price / Piece
059.468.01	50	14/20	1	498
059.468.07	250	24/40	1	594



Buy Now!





GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Flask, Kjeldahl

- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Used for the Determination of Nitrogen

Item Code	Capacity (ml)	Socket Size	Approx. Overall Height (mm)	Pack of	Price / Piece
070.202.01	50	19/26	200	2	507
070.202.02	100	19/26	200	2	571
070.202.03	100	24/29	200	2	757
070.202.04	300	24/29	295	2	816
070.202.05	500	24/29	300	2	1014
070.202.06	800	24/29	340	2	1118



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Flask, Kjeldahl

- Complies with DIN 12360
- Made from ASTM E-438 Type 1, Boro 3.3 heat resistance glass
- Suitable for determination of Nitrogen

Item Code	Capacity (ml)	D. (mm)	H. (mm)	Pack of	Price / Piece
077.202.01	100	60	200	2	250
077.202.02*	300	85	295	2	415
077.202.03	500	101	300	2	806
077.202.04*	800	117	340	2	961

* Non DIN




Arsenic Determination Apparatus as per USP

Item Code	Pack of	Price /Piece
345.202.01	1	4126



Arsenic Determination Apparatus as per IS

Item Code	Pack of	Price /Piece
345.207.01	1	4126

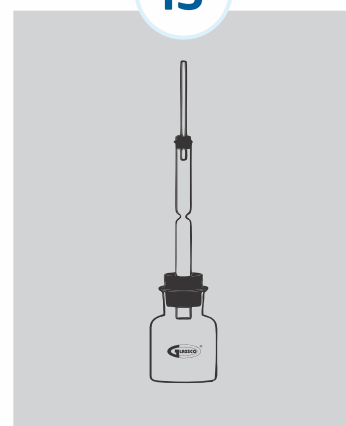

Tilt Measure

- Ideal for dispensing fixed volume of liquid
- Easy to use
- Tilt the unit backward to fill
- Tilt the unit forward to dispense
- Accuracy $\pm 5\%$ can be achieved
- Manufactured from chemically resistance 3.3 borosilicate tubing

Item Code	Capacity (ml)	Flask Capacity (ml)	N/S	Pack of	Price /Piece
071.252.13	5	100	24/29	5	983
071.252.19A	10	250	24/29	5	1047
071.252.19B	20	250	24/29	10	1188
071.252.19C	25	250	24/29	10	1275
071.252.19D	50	250	24/29	10	1486

* Available in 29/32 Joint size also





Nylon

Flask, Brush

- Made of Nylon Bristles

Item Code	Type	Material	Pack of	Price / Pack
593.303.04	Flask Brush	Nylon	50	6550



Si
240°C

Glass
Yarn

SS

EU

Flask, Tong, Euro Design

- Available in Silicon Sleeve and fibre Glass yarn to resist direct flame
- Hold Flask upto 2 Litres (60 mm OD).
- Made of Stainless Steel

Item Code	Length (mm)	Type	Max. Temp	Pack of	Price /Pack
396.303.05	250	Glass Fibre	500°C	4	1952
396.303.06	300	Glass Fibre	500°C	4	2060
396.303.07	250	Silicone	280°C	4	1504
396.303.08	300	Silicone	280°C	4	1652

Flask, Stand

- Gives stair like top view
- Every step provides excellent support to the round bottom flask
- Can hold round bottom Flasks up to 10 Ltr. capacity
- Autoclavable

Item Code	Item	Material	Pack of	Price /Pack
115.303.01	Flask Stand	Polypropylene	6	1386
417.303.01	Flask Stand	Silicone	2	3881



Buy Now!



Flask, Hand Grip

- Made of silicon
- Available with stand slip free mechanism
- Can withstand temp. upto 280°C

Item Code	Pack of	Price /Pack
418.303.01	4	5920



Buy Now!





1st in Asia
Comes with Blue Miniscus

HIGHER

— Visibility
— Accuracy
— Confidence

1st in the World
QR-Coded Volumetric Flask

— Scan
— Certificate
— Calibration

INSTANT

1st Glassware Product
Integrated with **CaliberLIMS**

CHECK

— Authenticity
— Usage
— Alerts

In Collaboration with
CaliberLIMS

QR-LabGlassTM PATENT PENDING

Download ↓



Quick Scan
QR Code Reader



NEOREADER



QR Code
Reader

QR-LabGlass™



SCAN VOLUMETRIC FLASK

Please download your app  or  or 
and scan your Volumetric Flask with your smartphone



SELECT CERTIFICATE INDIVIDUAL/BATCH CONFORMITY OR USER MANUAL

Website will open with choice of batch or individual
certificate and please type Serial No. from Flask



PRINT OR SAVE YOUR CERTIFICATE

Your certificate is now ready to be saved or printed at
the time of your audit, before audit or after audit.

Available at
your Fingertips !



QR-CODED : SCAN YOUR CALIBRATED GLASS.

“iGlass ...

Intelligent & Instant at Your Finger Tips”


Glassco understand the different requirement of our Esteemed customer. Therefore **Glassco** has wide range of volumetric flask in **USP, ASTM, NABL** & for the first time in the world have come out **QR coded Volumetric flasks** which are designed to meet our valuable customer requirement, while ensuring optimum quality. **Glassco** volumetric flasks are specially design to withstand demands of various laboratories world class.

- **Glassco Volumetric Flasks** Class A are made from **ASTM E 438 TYPE 1 Class A** heat resistant **BORO 3.3 Glass**
- Meet **DIN/ISO 1042 & USP (ASTM E-288 standard)**
- The calibration is done on automatic computer controlled machine and are calibrated to contain (TC, In) according to the ISO USP or ASTM tolerance standards.
- Supplied with individual calibrated certificate/Conformity certificate/user manual can also be downloaded from the site after scanning the QR code from the volumetric flask
- **Glassco Volumetric Flasks** are supplied with both PE stoppers and glass stoppers
- All **Class ‘A’** ISO Compliance flasks are printed in Blue colour.
- The meniscus mark is diamond grinded for longer persistence and better accuracy
- Calibrated at 20°C & 27°C as per customer requirement
- Meniscus mark for QR coded flasks.

Overview of the Printing Coloured :

QR-CODED:
SCAN YOUR
CALIBRATED GLASS.

USP | DIN | ASTM | ISO

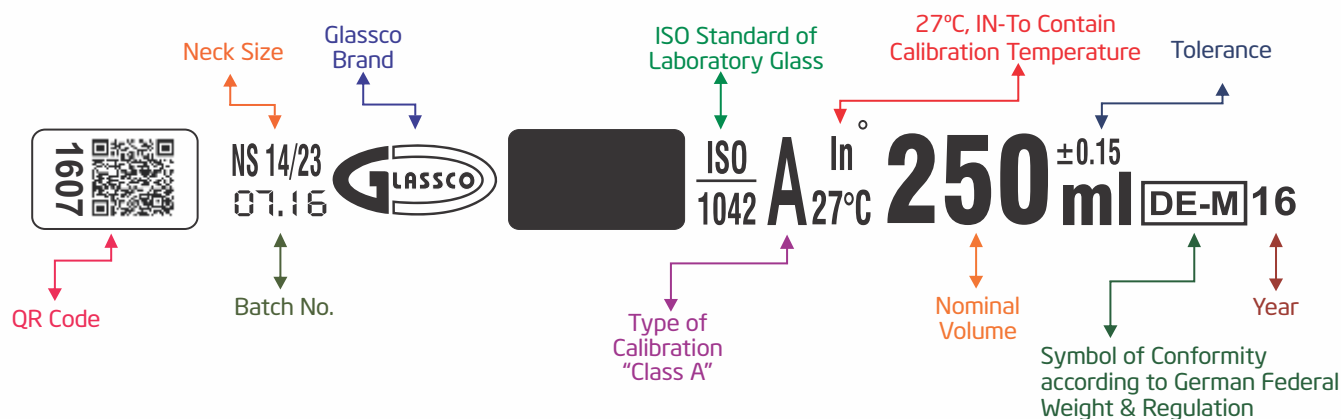

Flask, Volumetric, Class A, QR Coded with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with DIN ISO 1042 Standards
- Each flask comes specially printed QR code
- Each flask comes with Individual Work Certificate and Serial Number



Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
QRL.130.576.01	5*	10/19	0.040	1	1040
QRL.130.576.02	10*	10/19	0.040	1	901
QRL.130.576.03	20*	10/19	0.040	1	901
QRL.130.576.04	25	10/19	0.040	1	832
QRL.130.576.05	50	12/21	0.060	1	787
QRL.130.576.06	100	14/23	0.100	1	767
QRL.130.576.07	200	14/23	0.150	1	1084
QRL.130.577.07	200*	14/23	0.150	1	1190
QRL.130.576.08	250	14/23	0.150	1	1084
QRL.130.576.09	500	19/26	0.250	1	1421
QRL.130.576.10	1000	24/29	0.400	1	2079
QRL.130.576.11	2000	29/32	0.600	1	3376
QRL.130.576.14	5000	34/35	1.200	1	14449

*5ml to 20ml Supplied with trapezoidal shape for better stability

*200ml also Supplied with trapezoidal shape for better stability



Flask, Volumetric, Amber, Class A, QR Coded with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with DIN ISO 1042 Standards
- Each flask comes specially printed QR code
- Each flask comes with Individual Work Certificate and Serial Number.
- Amber colour flask for light sensitive solution



Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
QRL.130.576.01A	5*	10/19	0.040	1	1238
QRL.130.576.02A	10*	10/19	0.040	1	1074
QRL.130.576.03A	20*	10/19	0.040	1	1074
QRL.130.576.04A	25	10/19	0.040	1	1000
QRL.130.576.05A	50	12/21	0.060	1	945
QRL.130.576.06A	100	14/23	0.100	1	931
QRL.130.576.07A	200	14/23	0.150	1	1297
QRL.130.577.07A	200*	14/23	0.150	1	1425
QRL.130.576.08A	250	14/23	0.150	1	1277
QRL.130.576.09A	500	19/26	0.250	1	1708
QRL.130.576.10A	1000	24/29	0.400	1	2490
QRL.130.576.11A	2000	29/32	0.600	1	4044

*5ml to 20ml Supplied with trapezoidal shape for better stability

*200ml also Supplied with trapezoidal shape for better stability



Volumetric Flasks



Flask, Volumetric, Clear, Class A, USP, QR Coded with Penny Head glass & PE Stopper, Calibrated at 20°C

- Compliance with **USP** Standards
- Each flask comes specially printed QR code
- Each flask comes with Individual Work Certificate and Serial Number.



New Item Code	Cap. ml	N/S	Tolerance (± ml)	Pack of	Price / Piece
QRL.130.520.01	5*	10/19	0.020	1	1163
QRL.130.520.02	10*	10/19	0.020	1	1010
QRL.130.520.03	20*	10/19	0.030	1	1015
QRL.130.520.04	25	10/19	0.030	1	931
QRL.130.520.05	50	12/21	0.050	1	886
QRL.130.520.06	100	14/23	0.080	1	871
QRL.130.520.07	200	14/23	0.100	1	1218
QRL.130.520.08	250	14/23	0.120	1	1223
QRL.130.520.09	500	19/26	0.150	1	1609
QRL.130.520.10	1000	24/29	0.300	1	2336
QRL.130.520.11	2000	29/32	0.500	1	3797

*5ml to 20ml Supplied with trapezoidal shape for better stability



Flask, Volumetric, Amber, Class A, USP, QR Coded with Penny Head Glass & Plastic Stopper, Calibrated at 20°C

- With Individual work Certificate and Serial Number
- Amber colour flask for light sensitive solution



New Item Code	Cap. ml	N/S	Tolerance (± ml)	Pack of	Price / Piece
QRL.130.520.01A	5*	10/19	0.020	1	1386
QRL.130.520.02A	10*	10/19	0.020	1	1218
QRL.130.520.03A	20*	10/19	0.030	1	1218
QRL.130.520.04A	25	10/19	0.030	1	1119
QRL.130.520.05A	50	12/21	0.050	1	1074
QRL.130.520.06A	100	14/23	0.080	1	1049
QRL.130.520.07A	200	14/23	0.100	1	1485
QRL.130.520.08A	250	14/23	0.120	1	1490
QRL.130.520.09A	500	19/26	0.150	1	1960
QRL.130.520.10A	1000	24/29	0.300	1	2861
QRL.130.520.11A	2000	29/32	0.500	1	4608

*5ml to 20ml Supplied with trapezoidal shape for better stability

Flask, Volumetric, Clear Wide Mouth, Class A, USP, QR Coded with Penny Head glass & PE Stopper, Calibrated at 20°C

- Compliance with **USP** Standards
- Each flask comes specially printed QR code
- Each flask comes with Individual Work Certificate and Serial Number.



New Item Code	Cap. ml	N/S	Tolerance (± ml)	Pack of	Price / Piece
QRL.130.600.00	5*	12/21		1	1086
QRL.130.600.01	5*	14/23		1	1086
QRL.130.600.02B	10*	12/21		1	936
QRL.130.600.02	10	14/23		1	936
QRL.130.600.03B	20	12/21		1	970
QRL.130.600.03	20	14/23		1	970
QRL.130.600.04B	25	12/21		1	1033
QRL.130.600.04	25	14/23		1	1033
QRL.130.600.05	50	14/23		1	1014
QRL.130.600.06	100	19/26		1	1062
QRL.130.600.07	200	19/26		1	1251
QRL.130.600.08	250	19/26		1	1348
QRL.130.600.09	500	19/26		1	1678
QRL.130.600.09W	500	24/29		1	1678
QRL.130.600.10	1000	24/29		1	2435
QRL.130.600.10W	1000	29/32		1	2435
QRL.130.600.11	2000	29/32		1	3720

*5ml to 20ml Supplied with trapezoidal shape for better stability



Flask, Volumetric, Amber Wide Mouth, Class A, USP, QR Coded with Penny Head Glass & Plastic Stopper, Calibrated at 20°C

- With Individual work Certificate and Serial Number
- Amber colour flask for light sensitive solution

New Item Code	Cap. ml	N/S	Tolerance (± ml)	Pack of	Price / Piece
QRL.130.600.01A	5*	12/21		1	1319
QRL.130.600.01AB	5*	14/23		1	1319
QRL.130.600.02AB	10*	12/21		1	1140
QRL.130.600.02A	10	14/23		1	1140
QRL.130.600.03AB	20	12/21		1	1140
QRL.130.600.03A	20	14/23		1	1140
QRL.130.600.04AB	25	12/21		1	1237
QRL.130.600.04A	25	14/23		1	1237
QRL.130.600.05A	50	14/23		1	1213
QRL.130.600.06A	100	19/26		1	1276
QRL.130.600.07A	200	19/26		1	1504
QRL.130.600.08A	250	19/26		1	1630
QRL.130.600.09A	500	19/26		1	1921
QRL.130.600.10A	1000	24/29		1	2803
QRL.130.600.11A	2000	29/32		1	4515



Volumetric Flasks



Buy Now!

Flask, Volumetric, CLASS A, QR Coded, Serialized, Calibrated at 20°C

- These flasks are made as per ASTM E 288 Class A Type 1 Boro 3.3 Glass
- Serialized specification.
- The flasks have Amber graduated line and are calibrated TC (To Contain).
- These comes in Amber colour enamel printing.

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Type	Pack of	Price / Piece
QRL.134.536.01	5	9	0.02	Penny Head	Narrow	1	1168
QRL.134.536.02	10	9	0.02	Penny Head	Narrow	1	853
QRL.134.536.03*	20	9	0.03	Penny Head	Narrow	1	858
QRL.134.536.04	25	9	0.03	Penny Head	Narrow	1	781
QRL.134.536.05	50	9	0.05	Penny Head	Narrow	1	754
QRL.134.536.06	100	13	0.08	Penny Head	Narrow	1	737
QRL.134.536.07	200	16	0.1	Penny Head	Narrow	1	1012
QRL.134.536.08	250	16	0.12	Penny Head	Narrow	1	1012

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Type	Pack of	Price / Piece
QRL.131.536.01	5	13	0.02	Penny Head	Wide	1	1175
QRL.131.536.02	10	13	0.02	Penny Head	Wide	1	864
QRL.131.536.03*	20	13	0.03	Penny Head	Wide	1	869
QRL.131.536.04	25	13	0.03	Penny Head	Wide	1	798
QRL.131.536.05	50	13	0.05	Penny Head	Wide	1	765
QRL.131.536.06	100	16	0.08	Penny Head	Wide	1	748
QRL.131.536.07	200	19	0.12	Penny Head	Wide	1	1023
QRL.131.536.08	250	19	0.2	Penny Head	Wide	1	1023
QRL.131.536.09	500	19	0.2	Penny Head	Narrow	1	1375
QRL.131.536.10	1000	22	0.3	Penny Head	Narrow	1	2008
QRL.131.536.11	2000	27	0.5	Penny Head	Narrow	1	3245
QRL.131.536.13*	4000	38	1.2	Penny Head	-	1	6490
QRL.131.536.15*	6000	38	1.5	Penny Head	-	1	7480

* Non ASTM

*5ml to 20ml Supplied with trapezoidal shape for better stability

Flask, Volumetric, Amber, CLASS A, QR Coded, Serialized, Calibrated at 20°C

- These flasks are made as per ASTM E 288 Class A Type 1 Boro 3.3 Glass
- Serialized specification
- The flasks have diamond graduated line and are calibrated TC (To Contain).
- These comes in white colour enamel printing.

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Type	Pack of	Price / Piece
QRL.134.536.01A	5	9	0.02	Penny Head	Narrow	1	1155
QRL.134.536.02A	10	9	0.02	Penny Head	Wide	1	1034
QRL.134.536.03A*	20	9	0.03	Penny Head	Narrow	1	1034
QRL.134.536.04A	25	9	0.03	Penny Head	Wide	1	946
QRL.134.536.05A	50	9	0.05	Penny Head	Narrow	1	908
QRL.134.536.06A	100	13	0.08	Penny Head	Narrow	1	770
QRL.134.536.07A	200	16	0.1	Penny Head	Narrow	1	1265
QRL.134.536.08A	250	16	0.12	Penny Head	Narrow	1	1265

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Type	Pack of	Price / Piece
QRL.131.536.01A	5	13	0.02	Penny Head	Wide	1	1183
QRL.131.536.02A	10	13	0.02	Penny Head	Wide	1	1045
QRL.131.536.03A*	20	13	0.03	Penny Head	Wide	1	1045
QRL.131.536.04A	25	13	0.03	Penny Head	Wide	1	963
QRL.131.536.05A	50	13	0.05	Penny Head	Wide	1	919
QRL.131.536.06A	100	16	0.08	Penny Head	Wide	1	891
QRL.131.536.07A	200	19	0.1	Penny Head	Wide	1	1287
QRL.131.536.08A	250	19	0.12	Penny Head	Wide	1	1287
QRL.131.536.09A	500	19	0.2	Penny Head	Narrow	1	1678
QRL.131.536.10A	1000	22	0.3	Penny Head	Narrow	1	2530
QRL.131.536.11A	2000	27	0.5	Penny Head	Narrow	1	3905

* Non ASTM

*5ml to 20ml Supplied with trapezoidal shape for better stability



Buy Now!



Volumetric Flasks

Flask, Volumetric, Narrow Mouth, Class A with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number.

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price / Piece
130.576.00*	1*	10/19	0.025	1	1095
130.576.00B*	2*	10/19	0.025	1	1095
130.576.01	5**	10/19	0.04	1	987
130.576.02	10**	10/19	0.04	1	855
130.576.03	20**	10/19	0.04	1	855
130.576.04	25	10/19	0.04	1	790
130.576.05	50	12/21	0.06	1	747
130.576.06	100	14/23	0.1	1	729
130.577.07	200*	14/23	0.15	1	1135
130.576.07	200	14/23	0.15	1	1029
130.576.08	250	14/23	0.15	1	1029
130.576.09	500	19/26	0.25	1	1490
130.576.10	1000	24/29	0.4	1	1974
130.576.11	2000	29/32	0.6	1	3205
130.576.14	5000	34/35	1.2	1	13719



Buy Now!

Flask, Volumetric, Wide Mouth, Class A with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number.

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price / Piece
130.576.01WM	5	12/21	0.04	1	982
130.576.02WM	10	12/21	0.04	1	855
130.576.03WM	20	12/21	0.06	1	865
130.576.04WM	25	12/21	0.06	1	940
130.576.04W*	25	14/23	0.06	1	921
130.576.05W	50	14/23	0.1	1	902
130.576.06W*	100	19/26	0.1	1	949
130.576.07W*	200	19/26	0.2	1	1246
130.576.08WM*	250	19/26	0.2	1	1330
130.576.09WM*	500	24/29	0.4	1	1349
130.576.10WM	1000	29/32	0.6	1	2054

*1ml & 2ml sizes are of test tube shape | **5ml to 20ml Supplied with trapezoidal shape for better stability

**200ml also Supplied with trapezoidal shape for better stability

* Non DIN/ISO

Flask, Volumetric, Amber Narrow Mouth Class A with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number
- Specially Designed wide mouth for testing bigger diameter tablet

Item Code	Cap. (ml)	N/S	Tolerance (± ml)	Pack of	Price /Piece
130.576.01A	5*	10/19	0.04	1	1045
130.576.02A	10*	10/19	0.04	1	895
130.576.03A	20*	10/19	0.04	1	885
130.576.04A	25	12/21	0.06	1	858
130.576.05A	50	12/21	0.06	1	814
130.576.06A	100	14/23	0.1	1	765
130.576.07A	200	14/23	0.15	1	1122
130.576.08A	250	14/23	0.15	1	1055
130.576.09A	500	19/26	0.25	1	1405
130.576.10A	1000	24/29	0.4	1	2050
130.576.11A	2000	29/32	0.6	1	3335

Flask, Volumetric, Amber Wide, Mouth Class A with Penny Head glass & PE Stopper, Calibrated at 27°C


- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number
- Specially Designed wide mouth for testing bigger diameter tablet

Item Code	Cap. (ml)	N/S	Tolerance (± ml)	Pack of	Price /Piece
130.576.01WMA	5*	12/21	0.04	1	1156
130.576.02WMA	10*	12/21	0.04	1	1011
130.576.03WMA	20*	12/21	0.06	1	895
130.576.03MWA*	20	14/23	0.06	1	920
130.576.04BWMA	25	12/21	0.06	1	986
130.576.04MWA*	25	14/23	0.06	1	985
130.576.05MWA	50	14/23	0.1	1	930
130.576.06AW	100	19/26	0.1	1	1030
130.576.07MWA*	200	19/26	0.2	1	1310
130.576.08WMA*	250	19/26	0.2	1	1985
130.576.09WMA*	500	24/29	0.4	1	2050
130.576.10WMA	1000	29/32	0.6	1	2110


*5ml to 20ml Supplied with trapezoidal shape for better stability



Buy Now!

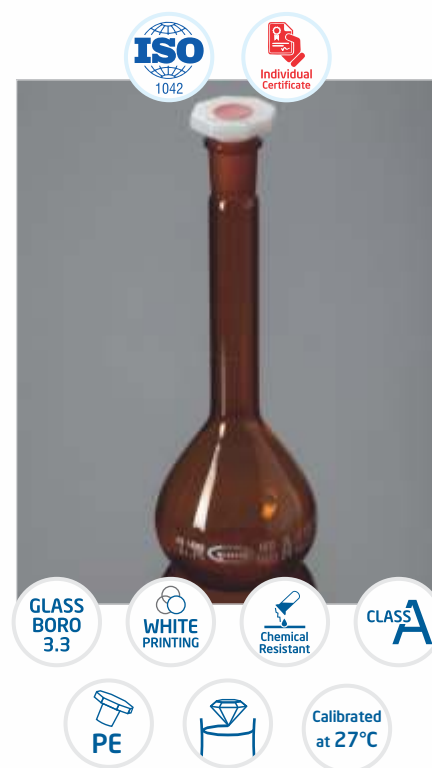

Volumetric Flasks

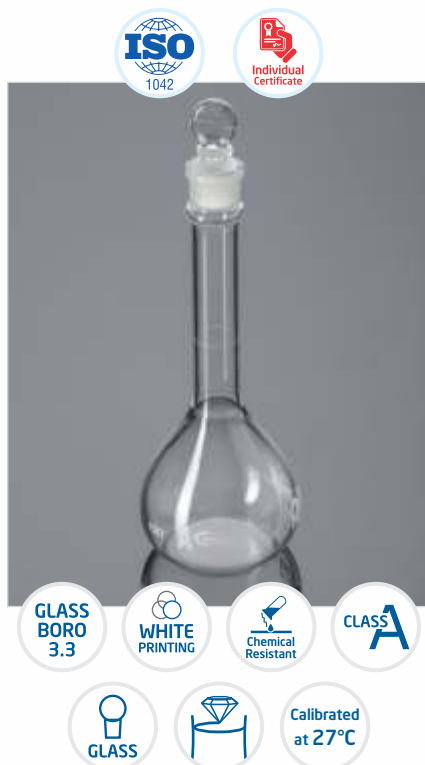

Buy Now!

Flask, Volumetric, Clear, Class A, with Penny Head Glass Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate
- Each flask made from clear tubing


Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.524.00*	1*	10/15	0.025	1	965
130.524.00B*	2*	10/15	0.025	1	965
130.524.01*	5**	10/15	0.025	1	865
130.524.02*	10**	10/15	0.025	1	745
130.524.03	20**	10/15	0.04	1	745
130.524.04	25	10/15	0.04	1	695
130.524.05*	50	10/15	0.06	1	665
130.524.06	100	14/15	0.10	1	640
130.524.07	200	14/15	0.15	1	905
130.524.08	250	14/15	0.15	1	895
130.524.09	500	19/20	0.25	1	1170
130.524.10*	1000	19/20	0.40	1	1730
130.524.11*	2000	24/25	0.60	1	2780
130.524.14	5000	34/35	1.20	1	13055

*1ml & 2ml sizes are of test tube shape

**5ml to 20ml Supplied with trapezoidal shape for better stability

* Non DIN/ISO

These are available till the stocks last

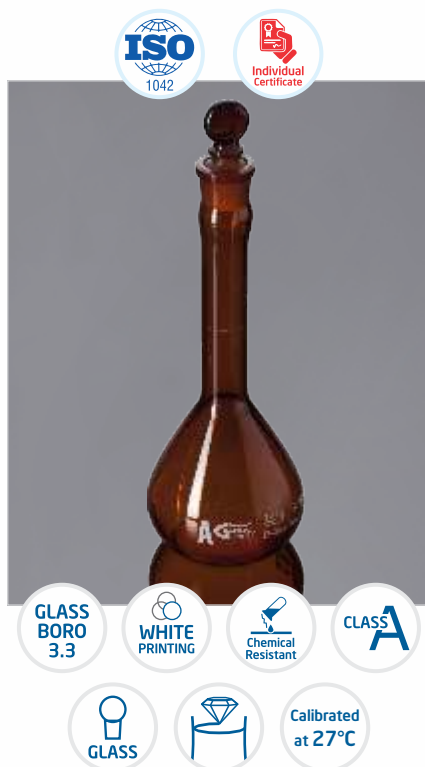

Buy Now!

Flask, Volumetric, Amber, Class A, with Penny Head Glass Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate
- Made from DIN ISO 3585 : 1998
- Heat Resistant Boro 3.3 Glass, Amber Colour

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.524.01A*	5*	10/15	0.025	1	1020
130.524.02A*	10*	10/15	0.025	1	900
130.524.03A	20*	10/15	0.04	1	900
130.524.04A	25	10/15	0.04	1	835
130.524.05A*	50	10/15	0.06	1	775
130.524.06A	100	14/15	0.10	1	765
130.524.07A	200	14/15	0.15	1	1075
130.524.08A	250	14/15	0.15	1	1065
130.524.09A	500	19/20	0.25	1	1415
130.524.10A*	1000	19/20	0.40	1	2070
130.524.11A*	2000	24/25	0.60	1	3400

**5ml to 20ml Supplied with trapezoidal shape for better stability

* Non DIN/ISO

These are available till the stocks last

Flask, Volumetric, Class A, NABL with Penny Head Glass & Plastic Stopper Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.508.01*	5*	10/19	0.040	1	2181
130.508.02*	10*	10/19	0.040	1	1889
130.508.03	20*	10/19	0.040	1	1889
130.508.04	25	10/19	0.040	1	1758
130.508.05	50	12/21	0.060	1	1758
130.508.06	100	14/23	0.100	1	1810
130.508.07	200	14/23	0.150	1	2303
130.508.08	250	14/23	0.150	1	2336
130.508.09	500	19/26	0.250	1	3111
130.508.10	1000	24/29	0.400	1	4470
130.508.11	2000	29/32	0.600	1	7233

*5ml to 20ml Supplied with trapezoidal shape for better stability

* Non DIN/ISO



Buy Now!



Flask, Volumetric, Amber, Class A, NABL with Penny Head Glass & PP Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Each flask comes with Individual Work Certificate and Serial Number

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.508.01A*	5*	10/19	0.040	1	2369
130.508.02A*	10*	10/19	0.040	1	2068
130.508.03A	20*	10/19	0.040	1	2068
130.508.04A	25	10/19	0.040	1	1871
130.508.05A	50	12/21	0.060	1	2007
130.508.06A	100	14/23	0.100	1	2077
130.508.07A	200	14/23	0.150	1	2472
130.508.08A	250	14/23	0.150	1	2750
130.508.09A	500	19/26	0.250	1	3431
130.508.10A	1000	24/29	0.400	1	5067
130.508.11A	2000	29/32	0.600	1	7962

*5ml to 20ml Supplied with trapezoidal shape for better stability

* Non DIN/ISO



Buy Now!



Volumetric Flasks



Buy Now!

Flask, Volumetric, Class A NABL, USP, with Penny Head Glass & PE Stopper Calibrated at 20°C

- Compliance with **USP** Standards
- Each flask comes with Individual Work Certificate and Serial Number

Item Code	Cap. ml	N/S	Tolerance (±ml)	Pack of	Price / Piece
130.407.01	5*	10/19	0.020	1	2181
130.407.02	10*	10/19	0.020	1	1889
130.407.02A	20*	10/19	0.030	1	1889
130.407.03	25	10/19	0.030	1	1758
130.407.04	50	12/21	0.050	1	1758
130.407.05	100	14/23	0.080	1	1810
130.407.06	200	14/23	0.100	1	2303
130.407.07	250	14/23	0.120	1	2336
130.407.08	500	19/26	0.150	1	3111
130.407.09	1000	24/29	0.300	1	4470
130.407.10	2000	29/32	0.500	1	7233

*5ml to 20ml Supplied with trapezoidal shape for better stability



TRAPEZOIDAL SHAPE

Flask, Volumetric, Clear, Wide Mouth, Class A, USP With Interchangeable Solid Glass Stopper, Calibrated at 20°C, Boro 3.3 Glass TYPE 1

- Calibrated as per **USP** tolerance
- Each flask comes with Individual Work Certificate and Serial Number
- Specially Designed wide mouth for testing bigger diameter tablet

Item Code	Cap.(ml)	N/S	Tolerance (± ml)	Type	Pack of	Price /Piece
130.600.00	5	12/21	0.06	Clear	1	1053
130.600.01	5*	14/23	0.06	Clear	1	1053
130.600.02	10*	14/23	0.06	Clear	1	907
130.600.02B	10	12/21	0.06	Clear	1	907
130.600.03	20**	14/23	0.06	Clear	1	940
130.600.03B	20	12/21	0.06	Clear	1	940
130.600.04	25	14/23	0.06	Clear	1	1001
130.600.04B	25	12/21	0.06	Clear	1	1001
130.600.05	50	14/23	0.08	Clear	1	982
130.600.06	100	19/26	0.10	Clear	1	1029
130.600.07	200	19/26	0.12	Clear	1	1213
130.600.08	250	19/26	0.12	Clear	1	1307
130.600.09	500	24/29	0.30	Clear	1	1626
130.600.10	1000	29/32	0.40	Clear	1	2359

** Not covered in the standards

*5ml to 20ml Supplied with trapezoidal shape for better stability



Flask, Volumetric, Class A, USP Standards with Penny Head Glass & Plastic Stopper, Calibrated at 20°C

- Compliance with **USP** Standards
- Each flask comes with Individual Work Certificate and Serial Number

New Item Code	Cap. ml	N/S	Tolerance (± ml)	Type	Pack of	Price / Piece
130.521.01	5*	10/19	0.020	Clear	1	1105
130.521.02	10*	10/19	0.020	Clear	1	959
130.521.03	20*	10/19	0.030	Clear	1	964
130.521.04	25	10/19	0.030	Clear	1	884
130.521.05	50	12/21	0.050	Clear	1	841
130.521.06	100	14/23	0.080	Clear	1	827
130.521.07	200	14/23	0.100	Clear	1	1156
130.521.08	250	14/23	0.120	Clear	1	1161
130.521.09	500	19/26	0.150	Clear	1	1528
130.521.10	1000	24/29	0.300	Clear	1	2218
130.521.11	2000	29/32	0.500	Clear	1	3605

*5ml to 20ml Supplied with trapezoidal shape for better stability



Volumetric Flasks



Flask, Volumetric, Amber, Class A, USP Standards with Penny Head Glass & PE Stopper, Calibrated at 20°C

- Compliance with **USP** Standards
- Each flask comes with Individual Work Certificate and Serial Number
- Each flask made from Amber colour tubing

New Item Code	Cap. ml	N/S	Tolerance (± ml)	Type	Pack of	Price / Piece
130.521.01A	5*	10/19	0.020	Amber	1	1316
130.521.02A	10*	10/19	0.020	Amber	1	1156
130.521.03A	20*	10/19	0.030	Amber	1	1156
130.521.04A	25	10/19	0.030	Amber	1	1062
130.521.05A	50	12/21	0.050	Amber	1	1020
130.521.06A	100	14/23	0.080	Amber	1	996
130.521.07A	200	14/23	0.100	Amber	1	1410
130.521.08A	250	14/23	0.120	Amber	1	1415
130.521.09A	500	19/26	0.150	Amber	1	1861
130.521.10A	1000	24/29	0.300	Amber	1	2717
130.521.11A	2000	29/32	0.500	Amber	1	4376

*5ml to 20ml Supplied with trapezoidal shape for better stability



Flask, Volumetric, Amber, Wide Mouth, Class A, USP With Interchangeable Solid Glass Stopper, Calibrated at 20°C, Boro 3.3 Glass TYPE 1

- Calibrated as per **USP** tolerance
- Each flask comes with Individual Work Certificate and Serial Number
- Specially Designed wide mouth for testing bigger diameter tablet

Item Code	Cap.(ml)	N/S	Tolerance (± ml)	Type	Pack of	Price /Piece
130.600.01A	5*	14/23	0.06	Amber	1	1278
130.600.01AB	5*	12/21	0.06	Amber	1	1278
130.600.02A	10*	14/23	0.06	Amber	1	1105
130.600.02AB	10*	12/21	0.06	Amber	1	1105
130.600.03A	20**	14/23	0.06	Amber	1	1105
130.600.03AB	20*	12/21	0.06	Amber	1	1105
130.600.04A	25	14/23	0.06	Amber	1	1199
130.600.04AB	25	12/21	0.06	Amber	1	1199
130.600.05A	50	14/23	0.08	Amber	1	1175
130.600.06A	100	19/26	0.10	Amber	1	1236
130.600.07A	200	19/26	0.12	Amber	1	1457
130.600.08A	250	19/26	0.12	Amber	1	1579

** Not covered in the standards

*5ml to 20ml Supplied with trapezoidal shape for better stability

Flask, Volumetric, CLASS A, Serialized, Calibrated at 20°C

- These flasks are made as per ASTM E 288 Class A Type 1 Boro 3.3 Glass
- The flasks have diamond graduated line and are calibrated TC (To Contain).
- These comes in Amber colour enamel printing.

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Neck Type	Pack of	Price / Piece
134.536.00*	1	8	0.01	Penny Head	Narrow	1	910
134.536.00B*	2	8	0.015	Penny Head	Narrow	1	915
134.536.01	5	9	0.02	Penny Head	Narrow	1	980
134.536.02	10	9	0.02	Penny Head	Narrow	1	853
134.536.03*	20	9	0.03	Penny Head	Narrow	1	859
134.536.04	25	9	0.03	Penny Head	Narrow	1	785
134.536.05	50	9	0.05	Penny Head	Narrow	1	748
134.536.06	100	13	0.08	Penny Head	Narrow	1	732
134.536.07	200	16	0.1	Penny Head	Narrow	1	1027
134.536.08	250	16	0.12	Penny Head	Narrow	1	1032

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Neck Type	Pack of	Price / Piece
131.536.01	5	13	0.02	Penny Head	Wide	1	935
131.536.02	10	13	0.02	Penny Head	Wide	1	785
131.536.03*	20	13	0.03	Penny Head	Wide	1	820
131.536.04	25	13	0.03	Penny Head	Wide	1	875
131.536.05	50	13	0.05	Penny Head	Wide	1	855
131.536.06	100	16	0.08	Penny Head	Wide	1	905
131.536.07	200	19	0.1	Penny Head	Wide	1	1065
131.536.08	250	19	0.12	Penny Head	Wide	1	1159
131.536.09	500	19	0.2	Penny Head	Narrow	1	1354
131.536.10	1000	22	0.3	Penny Head	Narrow	1	1970
131.536.11	2000	27	0.5	Penny Head	Narrow	1	3203
131.536.13*	4000	38	1.2	Penny Head	-	1	6504
131.536.15*	6000	38	1.5	Penny Head	-	1	7450

*Non ASTM & Not covered under Standards

**1 ml Sizes are of test tube shape



Buy Now!



Volumetric Flasks

Flask, Volumetric, Amber, CLASS A, Serialized, Calibrated at 20°C

- These flasks are made as per ASTM E 288 Class A Type 1 Boro 3.3 Glass
- The flasks have diamond graduated line and are calibrated TC (To Contain).
- These comes in white colour enamel printing.



Buy Now!

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Neck Type	Pack of	Price / Piece
134.236.00A*	1**	8	0.01	Penny Head	Narrow	1	1110
134.236.00BA*	2	8	0.015	Penny Head	Narrow	1	1110
134.536.01A	5	9	0.02	Penny Head	Narrow	1	1169
134.536.02A	10	9	0.02	Penny Head	Narrow	1	1027
134.536.03A*	20	9	0.03	Penny Head	Narrow	1	1027
134.536.04A	25	9	0.03	Penny Head	Narrow	1	943
134.536.05A	50	9	0.05	Penny Head	Narrow	1	906
134.536.06A	100	13	0.08	Penny Head	Narrow	1	885
134.536.07A	200	16	0.1	Penny Head	Narrow	1	1248
134.536.08A	250	16	0.12	Penny Head	Narrow	1	1254

Item Code	Cap. (ml)	Stopper Size	Tolerance (± ml)	Stopper Type	Neck Type	Pack of	Price / Piece
131.536.01A	5	13	0.02	Penny Head	Wide	1	1070
131.536.02A	10	13	0.02	Penny Head	Wide	1	970
131.536.03A*	20	13	0.03	Penny Head	Wide	1	965
131.536.04A	25	13	0.03	Penny Head	Wide	1	1045
131.536.05A	50	13	0.05	Penny Head	Wide	1	1035
131.536.06A	100	16	0.08	Penny Head	Wide	1	1085
131.536.07A	200	19	0.2	Penny Head	Wide	1	1275
131.536.08A	250	19	0.12	Penny Head	Wide	1	1406
131.536.09A	500	19	0.2	Penny Head	Narrow	1	1654
131.536.10A	1000	22	0.3	Penny Head	Narrow	1	2413
131.536.11A	2000	27	0.5	Penny Head	Narrow	1	3887

*Non ASTM & Not covered under Standards

**1 ml Sizes are of test tube shape

Flask, Volumetric, Clear Glass, with Amber mark, Class A with Penny Head glass & PE Stopper, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Amber colour triangle inscriptions at neck for the flask
- Each flask comes with Individual Work Certificate and Serial Number

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.581.00A	1**	10/19	0.025	1	925
130.581.00BA	2**	10/19	0.025	1	925
130.581.01A	5*	10/19	0.040	1	825
130.581.02A	10*	10/19	0.040	1	715
130.581.03A	20*	10/19	0.040	1	715
130.581.04A	25	10/19	0.040	1	655
130.581.05A	50	12/21	0.060	1	605
130.581.06A	100	14/23	0.100	1	615
130.581.07A	200	14/23	0.150	1	815
130.581.08A	250	14/23	0.150	1	870
130.581.09A	500	19/26	0.250	1	1075
130.581.10A	1000	24/29	0.400	1	1660
130.581.11A	2000	29/32	0.600	1	2705

**1ml & 2ml sizes are of test tube shape

*5ml to 20ml Supplied with trapezoidal shape for better stability

These are available till the stocks last



Buy Now!



Flask, Volumetric, White Mark, Amber, Class A, with Penny Head glass & PE Stopper

- Compliance with **DIN ISO 1042** Standards
- White colour triangle inscriptions at neck for the flask
- Each flask comes with Individual Work Certificate and Serial Number

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.580.01A	5*	10/19	0.040	1	1010
130.580.02A	10*	10/19	0.040	1	865
130.580.03A	20*	10/19	0.040	1	870
130.580.04A	25	10/19	0.040	1	795
130.580.05A	50	12/21	0.060	1	720
130.580.06A	100	14/23	0.100	1	745
130.580.07A	200	14/23	0.150	1	1040
130.580.08A	250	14/23	0.150	1	1040
130.580.09A	500	19/26	0.250	1	1285
130.580.10A	1000	24/29	0.400	1	1995
130.580.11A	2000	29/32	0.600	1	3230

**1ml & 2ml sizes are of test tube shape

*5ml to 20ml Supplied with trapezoidal shape for better stability

These are available till the stocks last



Buy Now!



Volumetric Flasks



Flask, Volumetric, Clear Glass, Class B, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Comes with Penny Head glass & PE Stopper

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
Item Code	Capacity (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
128.576.00*	1*	10/19	0.05	2	362
128.576.00B*	2*	10/19	0.05	2	324
128.576.01	5**	10/19	0.080	2	301
128.576.02	10**	10/19	0.080	2	282
128.576.03	20**	10/19	0.080	2	282
128.576.04	25	10/19	0.080	2	277
128.576.05	50	12/21	0.120	2	301
128.576.06	100	14/23	0.200	2	329
128.576.07	200	14/23	0.300	2	390
128.576.08	250	14/23	0.300	2	404
128.576.09	500	19/26	0.500	2	564
128.576.10	1000	24/29	0.800	2	926
128.576.11	2000	29/32	1.200	1	1927
128.576.12	5000	34/35	2.400	1	6904

*1ml & 2ml sizes are of test tube shape

**5ml to 20ml Supplied with trapezoidal shape for better stability

*Non DIN/ISO



Flask, Volumetric, Amber, Class B, Calibrated at 27°C

- Compliance with **DIN ISO 1042** Standards
- Comes with Penny Head glass & PE Stopper

Item Code	Cap. (ml)	N/S	Tolerance (±ml)	Pack of	Price /Piece
130.522.00A*	1*	10/19	0.05	2	440
130.522.00BA*	2*	10/19	0.05	2	440
130.522.01A	5**	10/19	0.08	2	461
130.522.02A	10**	10/19	0.08	2	437
130.522.03A	20**	10/19	0.08	2	437
130.522.04A	25	10/19	0.08	2	437
130.522.05A	50	12/21	0.120	2	461
130.522.06A	100	14/23	0.200	2	522
130.522.07A	200	14/23	0.300	2	550
130.522.08A	250	14/23	0.300	2	559
130.522.09A	500	19/26	0.500	2	841
130.522.10A	1000	24/29	0.800	2	1377
130.522.11A	2000	29/32	1.200	1	2811

*1ml & 2ml sizes are of test tube shape

**5ml to 20ml Supplied with trapezoidal shape for better stability

*Non DIN/ISO

Volumetric Flask for Sugar Estimation

- As per BS 675
- Two mark flask designed for the analysis of sugar solutions
- The two graduation marks provide a dilution of 1 in 10

Item Code	Cap. (ml)	Pack of	Price /Piece
133.502.03	100/110	2	437



Buy Now!



Flask, Volumetric (PP)

- These flask are autoclavable, strong, unbreakable
- These flask have good contact clarity.
- These autoclavable flasks are provided with screw caps to prevent leakage

Item Code	Cap. (ml)	Pack of	Price /Pack
158.303.01	25	6	584
158.303.02	50	6	726
158.303.03	100	6	874
158.303.04	250	2	363
158.303.05	500	2	474
158.303.06	1000	2	670



Buy Now!



Volumetric Flasks



Buy Now!

Bumper Guard for Volumetric Flask

Item Code	Cap. (ml)	Colour	N/S	Pack of	Price /Piece
127.202.01	5-25	Yellow	10/19	100	50
127.202.02	50-100	Green	12/21	100	70
127.202.03	200-250	Blue	14/23	100	129
127.202.04	500	Orange	19/26	100	180
127.202.05	1000	Red	24/29	50	238




Buy Now!

Stopper, Solid Penny Head

- For ASTM Standard Flasks
- The Flasks with ASTM E-288 can also be provided with Penny Head Stoppers

Item Code	Description	Type	Pack of	Price /Piece
012.269.02	Stopper No 13	Clear	100	136
012.269.02A	Stopper No 16	Clear	100	259
012.269.03	Stopper No 19	Clear	100	315
012.269.04	Stopper No 22	Clear	100	334
012.269.05	Stopper No 27	Clear	100	346

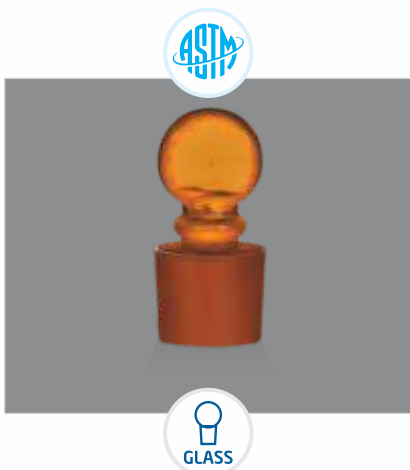

Buy Now!

Stopper, Amber, Solid Penny Head

- For ASTM Standard Flasks
- The Flasks with ASTM E-288 can also be provided with Penny Head Stoppers

Item Code	Description	Type	Pack of	Price /Piece
012.278.02	Stopper No 13	Amber	100	178
012.278.02A	Stopper No 16	Amber	100	330
012.278.03	Stopper No 19	Amber	100	403
012.278.04	Stopper No 22	Amber	100	429
012.278.05	Stopper No 27	Amber	100	442

Stopper, Solid Penny Head

- Used on different kind of jointed products like bottles, stoppered cylinder and jointed flasks.
- The stopper provides a good grip
- Comes in **DIN Standard** joint sizes and **ASTM standard**

Item Code	N/S	Type	Pack of	Price /Piece
012.512.01	10/19	Clear	50	114
012.512.01A	12/21	Clear	50	120
012.512.02	14/23	Clear	50	120
012.512.03	19/26	Clear	50	139
012.512.04	24/29	Clear	50	266
012.512.05*	29/32	Clear	50	323
012.512.06*	34/35	Clear	50	342



Buy Now!



Stopper, Amber, Solid Penny Head

- Used on different kind of jointed products like bottles, stoppered cylinder and jointed flasks.
- The stopper provides a good grip
- Comes in **DIN Standard** joint sizes and **ASTM standard**

Item Code	N/S	Type	Pack of	Price /Piece
012.513.01A	10/19	Amber	50	139
012.513.02A	12/21	Amber	50	180
012.513.03A	14/23	Amber	50	180
012.513.04A	19/26	Amber	50	206
012.513.05A	24/29	Amber	50	322
012.513.06A	29/32	Amber	50	380
012.513.07A	34/35	Amber	50	412



Buy Now!



Stopper, Flower-Power™, Polyethylene

- Agronomic Design
- In compliance with DIN 12254 standard
- Used mainly with volumetric flasks the **Flower-Power™** form large head provides good grip and also protects flasks from breaking if it drops accidentally
- Available in Multiple Color against Anaquel 100 Pieces

White & Blue DIN 12254

Item Code	N/S	Pack of	Colour	Price /Piece
011.232.01	10/19	100	Green	60
011.232.02	12/21	100	Purple	65
011.232.03	14/23	100	Yellow	70
011.232.04	19/26	100	Blue	80
011.232.05	24/29	100	Green	100
011.232.06	29/32	100	Red	130
011.232.07*	34/35	100	Orange	145

* Non DIN

Available in Different colours



Buy Now!



Funnels



Buy Now!

Funnel

- Made from ASTM E 438 TYPE 1 CLASS A BORO 3.3 GLASS
- Compliance with DIN ISO 4798 & USP standards

Item Code	Diameter (mm)	Pack of	Price /Piece
238.502.01*	25	10	108
238.502.02	35	10	138
238.502.03*	38	10	144
238.502.04*	40	10	148
238.502.05*	50	10	145
238.502.06	55	10	167
238.502.07*	65	10	181
238.502.08*	70	10	180
238.502.09	75	10	183
238.502.10*	80	10	206
238.502.11	100	10	229
238.502.12	125	10	483
238.502.13	150	10	544

* Non DIN



Buy Now!

Funnel, Long stem

- With 60° bowl angle for precise fitting of filter paper
- Manufactured from chemical and heat resistant borosilicate glass
- Stem length approximately 150mm

Item Code	Top External dia (mmn)	Stem O.D. (mm)	To suit filter paper dia (mm)	Pack of	Price / Piece
238.215.08	70	8	70-90	6	196
238.215.10	80	8	90-150	6	234
238.215.11A	105	8	150-185	6	272

Funnel, Powder

- Made from ASTM E-438, TYPE-1, BORO 3.3 GLASS
- Available with cone

Item Code	N/S Size	Approx Funnel Dia. (mm)	Pack of	Price /Piece
238.202.01P	14/23	45	10	269
238.202.02P	14/23	70	10	349
238.202.03P	29/32	70	10	388
238.202.04P	29/32	80	10	463
238.202.05P	14/23	100	10	487
238.202.06P	29/32	100	10	529



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

Funnel, Powder

- Made from ASTM E-438, TYPE-1, CLASS-A, BORO 3.3 GLASS
- Comes with fire polished rim and stem

Item Code	Top Diameter (mm)	Stem O.D Max. mm	Pack of	Price /Piece
238.404.06P	60	20	6	264
238.404.08P	80	25	6	296
238.404.10P	100	25	6	362
238.404.12P	125	30	2	457
238.404.15P	150	31	2	488



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Funnel, Analytical

- Made of Polypropylene

Item Code	Size (mm)	Pack of	Price /Pack
207.303.01	50mm, Inside 50, Stem Length 50, PP	72	1107
207.303.02	62mm, Inside 62, Stem Length 67, PP	36	677
207.303.03	75mm, Inside 75, Stem Length 77, PP	36	677
207.303.04	100mm, Inside 100, Stem Length 95, PP	36	1704
207.303.05	35mm, Inside 35, Stem Length 37, PP	80	984



Buy Now!

Funnel, Long Stem, Smooth Walls

- Made of Polypropylene
- 60°C cone angle and external ribs to prevent air lock.
- Can also be steam autoclaved

Item Code	Size (mm)	I.D. (mm)	Stem Length (mm)	Pack of	Price /Pack
122.303.04	100	93	84	36	880
122.303.05	150	148	55	12	1058

Funnel, Powder

- Made of Polypropylene
- Used for transferring powdered reagent
- Unique parallel stem minimizes bridging of powder
- Autoclavable at 120°C

Item Code	O.D. (mm)	I.D. (mm)	Stem Length(mm)	Pack of	Price / Pack
210.303.01	70	65	22	36	677
210.303.02	85	78	30	36	953
210.303.03	107	100	33	36	2215
210.303.04	153	145	30	12	1390



Buy Now!



Funnel, Industrial

- Made of Polypropylene
- Used for convenient filling of carboy's, drums & barrels

Item Code	Dia (mm)	Pack of	Price /Pack
211.303.01	200	12	4061
211.303.02	250	6	3249



Buy Now!





Buy Now!

Funnel, Buchner, With Sintered Disc

- Made from ASTM E 438 type-1, Class A Boro 3.3 glass
- Comes with fire polished rim and stem

Item Code	Capacity (ml)	Disc Dia (mm)	Porosity	Pack of	Price /Piece
256.G00.01	35	30	0	2	689
256.G01.01	35	30	1	2	640
256.G02.01	35	30	2	2	640
256.G03.01	35	30	3	2	640
256.G04.01	35	30	4	2	640
256.G05.01	35	30	5	2	779
256.G00.02	80	40	0	2	1271
256.G01.02	80	40	1	2	1228
256.G02.02	80	40	2	2	1228
256.G03.02	80	40	3	2	1228
256.G04.02	80	40	4	2	1228
256.G05.02	80	40	5	2	1437
256.G00.03	200	65	0	2	2151
256.G01.03	200	65	1	2	1914
256.G02.03	200	65	2	2	1914
256.G03.03	200	65	3	2	1914
256.G04.03	200	65	4	2	1914
256.G05.03	200	65	5	2	2244
256.G00.04	500	90	0	2	5718
256.G01.04	500	90	1	2	4440
256.G02.04	500	90	2	2	4514
256.G03.04	500	90	3	2	4514
256.G04.04	500	90	4	2	4514
256.G05.04	500	90	5	2	5966
256.G00.05	1000	120	0	1	10689
256.G01.05	1000	120	1	1	8725
256.G02.05	1000	120	2	1	8725
256.G03.05	1000	120	3	1	8725
256.G04.05	1000	120	4	1	8725
256.G05.05	1000	120	5	1	11154

Funnel, Buchner

- Made of Polypropylene
- Light weight
- Easy to clean & autoclavable
- Top portion snap fit ted with the lower one forms a vacuum seal which requires no greasing
- Base of the top portion has per forated filter plate

Item Code	Size (mm)	Pack of	Price /Pack
123.303.01	70	12	3305
123.303.02	110	6	2087
123.303.03	90	6	1900



Buy Now!



Funnel, Buchner, Euro Design

- Made of Porcelain
- Temperature upto 700°C

Item Code	Dia OD x H (mm)	Pack of	Price / Pack
527.303.10	20 x 64	10	1820
527.303.11	51 x 89	10	2840
527.303.12	67 x 110	6	2148
527.303.13	84 x 143	4	2072
527.303.14	105 x 160	2	1170
527.303.15	125 x 195	2	1354
527.303.16	142 x 202	1	1078
527.303.17	170 x 221	1	2397
527.303.18	210 x 270	1	3328



Buy Now!



Funnels

Separating and Dropping Funnels are produced from ASTM E-438 TYPE-1 CLASS A BORO 3.3 heat resistant glass. All these Funnels are manufactures as per DIN ISO 4800 standard . The printing is done in white colour



Funnel, Separating, Squibb (Globe) Shape with Glass Stopcock

- Compliance with ISO 4800 Standards
- Without Graduation
- With PE Stopper

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
147.202.02	50	19/26	2.5	Solid Glass	1	1210
147.202.02A*	60	14/23	2.5	Solid Glass	1	1219
147.202.03	100	19/26	2.5	Solid Glass	1	1317
147.202.03A*	125	19/26	2.5	Solid Glass	1	1317
147.202.04	250	29/32	4	Solid Glass	1	1395
147.202.05	500	29/32	4	Solid Glass	1	1848
147.202.06	1000	29/32	6	Solid Glass	1	2509
147.202.07	2000	29/32	6	Solid Glass	1	4573

* Non DIN



Funnel, Separating, Squibb (Globe) Shape, with Glass Stopcock

- Compliance with ISO 4800 Standards
- With Graduation
- With PE Stopper

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
147.209.02	50	19/26	2.5	Solid Glass	1	1214
147.209.03	100	19/26	2.5	Solid Glass	1	1320
147.209.04	250	29/32	4	Solid Glass	1	1452
147.209.05	500	29/32	4	Solid Glass	1	1980
147.209.06	1000	29/32	6	Solid Glass	1	2508
147.209.07	2000	29/32	6	Solid Glass	1	4488

Funnel, Separating, Squibb (Globe) Shape, With Needle valve Stopcock

- Compliance with ISO 4800 Standards
- Without Graduation
- With PE Stopper
- Bore 0-3 mm

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
148.202.02	50	19/26	Needle Valve	1	1162
148.202.02A*	60	14/23	Needle Valve	1	1113
148.202.03	100	19/26	Needle Valve	1	1267
148.202.03A*	125	19/26	Needle Valve	1	1182
148.202.04	250	29/32	Needle Valve	1	1308
148.202.05	500	29/32	Needle Valve	1	1764
148.202.06	1000	29/32	Needle Valve	1	2220
148.202.07	2000	29/32	Needle Valve	1	3840

*Non DIN



Buy Now!



Funnel, Separating, Squibb (Globe) Shape

- Compliance with ISO 4800 Standards
- With Graduation
- With PE Stopper
- Bore 0-3 mm

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
148.209.02	50	19/26	Needle Valve	1	1162
148.209.03	100	19/26	Needle Valve	1	1296
148.209.04	250	29/32	Needle Valve	1	1267
148.209.05	500	29/32	Needle Valve	1	1872
148.209.06	1000	29/32	Needle Valve	1	2352
148.209.07	2000	29/32	Needle Valve	1	4164



Buy Now!





Buy Now!

Funnel, Separating, Squibb (Globe) shape, With PTFE Stopcock

- Compliance with ISO 4800 Standards
- Without Graduation
- With PE Stopper
- Bore 0-3 mm

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
149.202.02	50	19/26	PTFE	1	1412
149.202.02A*	60	14/23	PTFE	1	1412
149.202.03	100	19/26	PTFE	1	1478
149.202.03A*	125	19/26	PTFE	1	1478
149.202.04	250	29/32	PTFE	1	1620
149.202.05	500	29/32	PTFE	1	2086
149.202.06	1000	29/32	PTFE	1	2508
149.202.07	2000	29/32	PTFE	1	4660

* Non DIN



Buy Now!

Funnel, Separating, Squibb (Globe) shape, With PTFE Stopcock

- Compliance with ISO 4800 Standards
- With Graduation
- With PE Stopper
- Bore 0-3 mm

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
149.209.02	50	19/26	PTFE	1	1571
149.209.03	100	19/26	PTFE	1	1610
149.209.04	250	29/32	PTFE	1	1729
149.209.05	500	29/32	PTFE	1	1940
149.209.06	1000	29/32	PTFE	1	2706
149.209.07	2000	29/32	PTFE	1	4752

Funnel, Separating, Pear (ISO Shape), With Glass Stopcock

- With PE Stopper
- Complies with ISO 4800 Standards

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price /Piece
150.202.02	50	19/26	Solid Glass	1	1082
150.202.03	100	19/26	Solid Glass	1	1228
150.204.03A*	125	19/26	Solid Glass	1	1340
150.202.04	250	29/32	Solid Glass	1	1472
150.202.05	500	29/32	Solid Glass	1	1855
150.202.06	1000	29/32	Solid Glass	1	2343
150.202.07	2000	29/32	Solid Glass	1	3960

* Non DIN



Buy Now!



Funnel, Separating, Pear (ISO Shape), With Needle Valve Stopcock


- With PE Stopper
- Complies with ISO 4800 Standards
- Bore 0-3 mm

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
151.202.02	50	19/26	Needle Valve	1	924
151.202.03	100	19/26	Needle Valve	1	924
151.204.03A*	125	19/26	Needle Valve	1	942
151.202.04	250	29/32	Needle Valve	1	1076
151.202.05	500	29/32	Needle Valve	1	1317
151.202.06	1000	29/32	Needle Valve	1	1948
151.202.07	2000	29/32	Needle Valve	1	3264

* Non DIN



Buy Now!

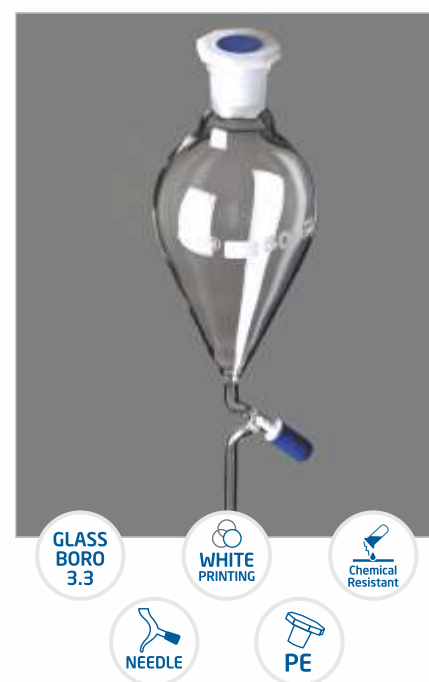



Buy Now!

Funnel, Separating, Pear (ISO Shape), With PTFE Stopcock

- With PE Stopper
- Complies with ISO 4800 Standards

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price /Piece
152.202.02	50	19/26	2.5	PTFE	1	1373
152.202.03	100	19/26	2.5	PTFE	1	1386
152.202.03A*	125	19/26	2.5	PTFE	1	1403
152.202.04	250	29/32	4	PTFE	1	1544
152.202.05	500	29/32	4	PTFE	1	1756
152.202.06	1000	29/32	6	PTFE	1	2479
152.202.07	2000	29/32	6	PTFE	1	3740

* Non DIN



Buy Now!

Funnel, Dropping, Cylindrical, With Glass Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With PE Stopper
- Complies with ISO 4800 Standards

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
154.203.02	50	14/23	2.5	Solid Glass	1	894
154.204.02*	50	29/32	2.5	Solid Glass	1	845
154.203.03	100	14/23	2.5	Solid Glass	1	908
154.204.03*	100	29/32	2.5	Solid Glass	1	1001
154.202.04	250	29/32	4	Solid Glass	1	1045
154.202.05	500	29/32	4	Solid Glass	1	1579
154.202.06	1000	29/32	6	Solid Glass	1	2600

* Non DIN

Funnel, Dropping, Cylindrical, With Needle Valve Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- Available with PE Stopper
- Complies with ISO 4800 Standards

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
156.203.02	50	14/23	Needle Valve	1	766
156.204.02	50	29/32	Needle Valve	1	838
156.203.03	100	14/23	Needle Valve	1	845
156.204.03	100	29/32	Needle Valve	1	917
156.202.04	250	29/32	Needle Valve	1	1531
156.202.05	500	29/32	Needle Valve	1	1914
156.202.06	1000	29/32	Needle Valve	1	3254



Buy Now!



Funnel, Dropping, Cylindrical, With PTFE Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With PE Stopper
- Complies with ISO 4800 Standards

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
158.203.02	50	14/23	2.5	PTFE	1	1366
158.204.02*	50	29/32	2.5	PTFE	1	1472
158.203.03	100	14/23	2.5	PTFE	1	1465
158.204.03*	100	29/32	2.5	PTFE	1	1544
158.202.04	250	29/32	4	PTFE	1	1531
158.202.05	500	29/32	4	PTFE	1	1914
158.202.06	1000	29/32	6	PTFE	1	3254



Buy Now!



* Non DIN

Funnel, Dropping, Gilson, With Glass Stopcock

- With PE Stopper



Buy Now!

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
159.202.01	50	19/26	2.5	Solid Glass	1	898
159.202.02	100	19/26	2.5	Solid Glass	1	944
159.202.03	250	29/32	4	Solid Glass	1	1122
159.202.04	500	29/32	4	Solid Glass	1	1254
159.202.05	1000	29/32	6	Solid Glass	1	1795
159.202.06	2000	29/32	6	Solid Glass	1	2462

Funnel, Dropping, Gilson, With PTFE Stopcock

- Available with PE Stopper



Buy Now!

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
160.202.01	50	19/26	2.5	PTFE	1	1346
160.202.02	100	19/26	2.5	PTFE	1	1393
160.202.03	250	29/32	4	PTFE	1	1439
160.202.04	500	29/32	4	PTFE	1	1657
160.202.05	1000	29/32	6	PTFE	1	2429
160.202.06	2000	29/32	6	PTFE	1	3320

Funnel, Separating, Pear (ISO) shape, With Glass Stopcock

- Available with PE Stopper
- With cone & stem

Item Code	Capacity (ml)	Socket & Cone N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
162.202.03	50	19/26	2.5	Solid Glass	1	818
162.202.05	100	19/26	2.5	Solid Glass	1	911
162.204.06	250	29/32	4	Solid Glass	1	1129
162.204.08	500	29/32	4	Solid Glass	1	1412
162.204.11	1000	29/32	6	Solid Glass	1	2000



Buy Now!




Funnel, Separating, Pear (ISO) shape, With Needle Valve Stopcock

- Available with PE Stopper
- With cone & stem
- Bore 0-3 mm

Item Code	Capacity (ml)	Socket & Cone N/S	Stopcock Type	Pack of	Price / Piece
163.202.03	50	19/26	Needle Valve	1	667
163.202.05	100	19/26	Needle Valve	1	785
163.204.06	250	29/32	Needle Valve	1	990
163.204.08	500	29/32	Needle Valve	1	1353
163.204.11	1000	29/32	Needle Valve	1	1960



Buy Now!

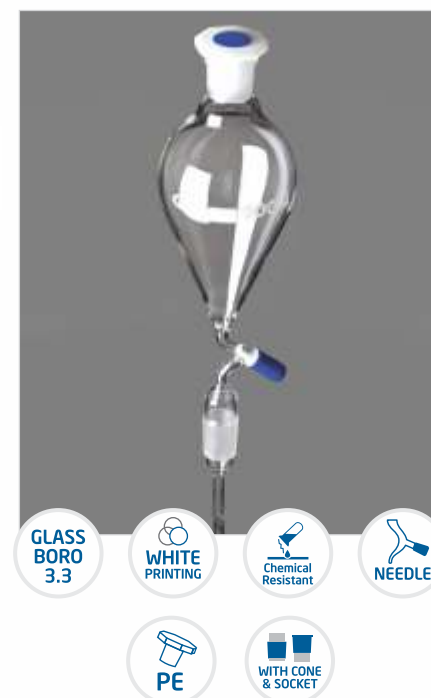

Funnel, Separating, Pear (ISO) shape, With PTFE Stopcock

- With PE Stopper
- With Cone & Stem



Buy Now!

Item Code	Capacity (ml)	Socket & Cone N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
164.202.03	50	19/26	2.5	PTFE	1	1505
164.202.05	100	19/26	2.5	PTFE	1	1624
164.204.06	250	29/32	4	PTFE	1	1775
164.204.08	500	29/32	4	PTFE	1	2152
164.204.11	1000	29/32	6	PTFE	1	2996



Funnel, Separating, Pear (ISO) Shape, With Glass Stopcock

- with stem inside cone



Buy Now!

Item Code	Capacity (ml)	Socket & Cone N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
162.210.03	50	19/26	2.5	Solid Glass	1	977
162.210.05	100	19/26	2.5	Solid Glass	1	1030
162.210.06	250	29/32	4	Solid Glass	1	1241
162.210.08	500	29/32	4	Solid Glass	1	1558
162.210.10	1000	29/32	6	Solid Glass	1	2145




Funnel, Separating, Pear (ISO) Shape, With PTFE Stopcock

- with stem inside cone

Item Code	Capacity (ml)	Socket & Cone N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
164.210.03	50	19/26	2.5	PTFE	1	1630
164.210.05	100	19/26	2.5	PTFE	1	1756
164.210.06	250	29/32	4	PTFE	1	1894
164.210.08	500	29/32	4	PTFE	1	2290
164.210.10	1000	29/32	6	PTFE	1	3194



Buy Now!

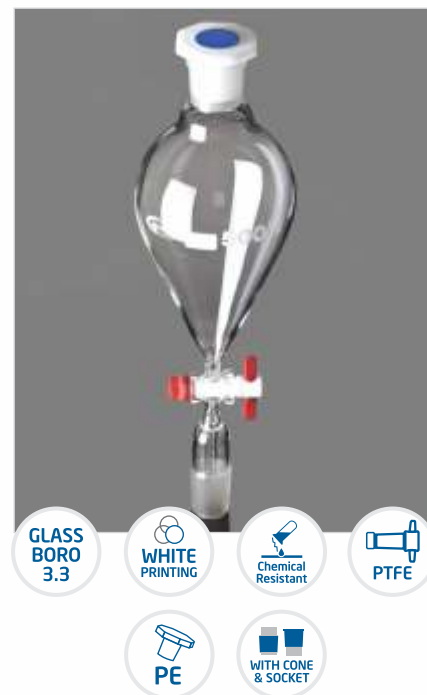

Funnel, Separating, Cylindrical, With Glass Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With PE Stopper
- With Cone & Stem


Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
165.202.02	50	14/23	2.5	Solid Glass	1	805
165.202.02A*	50	29/32	2.5	Solid Glass	1	818
165.202.03	100	14/23	2.5	Solid Glass	1	838
165.202.03A*	100	29/32	2.5	Solid Glass	1	931
165.202.05A	250	29/32	4	Solid Glass	1	1135
165.202.06A	500	29/32	4	Solid Glass	1	1485
165.202.07A	1000	29/32	6	Solid Glass	1	2251



Buy Now!



* Non DIN

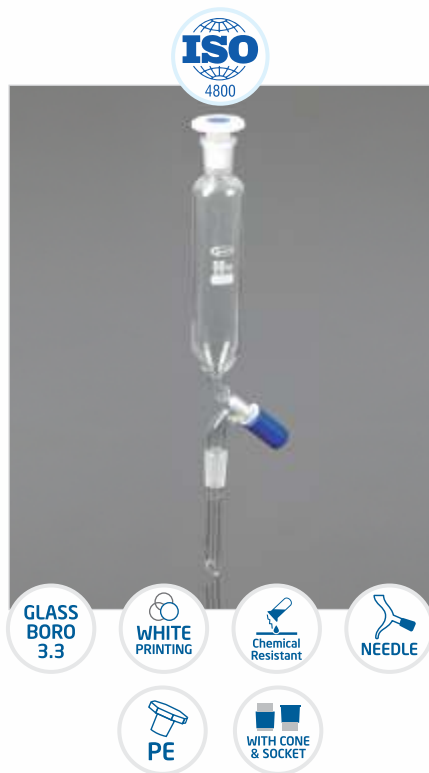

Funnel, Separating, Cylindrical, With Needle Valve Stopcock


- Made from DIN ISO 3585, BORO 3.3 GLASS
- With PE Stopper
- With cone & stem



Buy Now!

Item Code	Capacity (ml)	N/S	Stopcock Type	Pack of	Price / Piece
166.202.02	50	14/23	Needle Valve	1	713
166.202.02A*	50	29/32	Needle Valve	1	713
166.202.03	100	14/23	Needle Valve	1	733
166.202.03A*	100	29/32	Needle Valve	1	838
166.202.05A	250	29/32	Needle Valve	1	1056
166.202.06A	500	29/32	Needle Valve	1	1498
166.202.07A	1000	29/32	Needle Valve	1	2574

* Non DIN

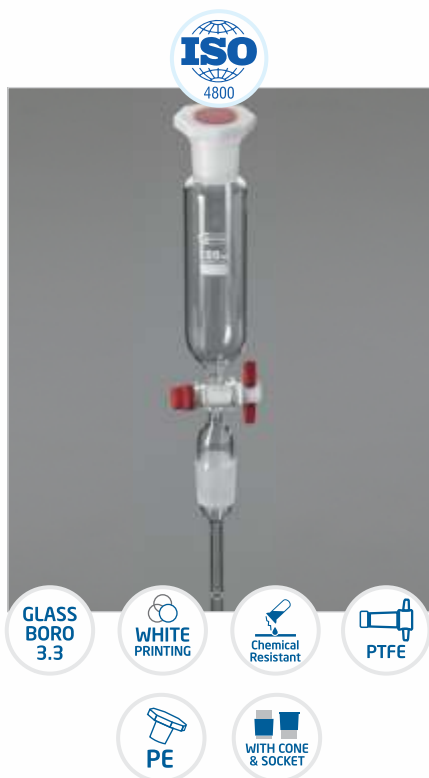

Funnel, Separating, Cylindrical, With PTFE Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With PE Stopper
- With cone & stem



Buy Now!

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
167.202.02	50	14/23	2.5	PTFE	1	1406
167.202.02A*	50	29/32	2.5	PTFE	1	1452
167.202.03	100	14/23	2.5	PTFE	1	1492
167.202.03A*	100	29/32	2.5	PTFE	1	1591
167.202.05A	250	29/32	4	PTFE	1	1742
167.202.06A	500	29/32	4	PTFE	1	2046
167.202.07A	1000	29/32	6	PTFE	1	3313

* Non DIN

Funnel, Dropping, Cylindrical, Graduated, With Glass Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With stem inside cone
- Complies with DIN 4800 Standards
- With PE Stopper

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
165.210.02	50	14/23	2.5	Solid Glass	1	944
165.210.02A*	50	29/32	2.5	Solid Glass	1	977
165.210.03	100	14/23	2.5	Solid Glass	1	990
165.210.03A*	100	29/32	2.5	Solid Glass	1	1063
165.210.05	250	29/32	4	Solid Glass	1	1261
165.210.06	500	29/32	4	Solid Glass	1	1617
165.210.07	1000	29/32	6	Solid Glass	1	2409

* Non DIN



Buy Now!



Funnel, Dropping, Cylindrical, Graduated, With PTFE Stopcock

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With stem inside cone
- Complies with DIN 4800 Standards
- With PE Stopper

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
167.210.02	50	14/23	2.5	PTFE	1	1525
167.210.02A*	50	29/32	2.5	PTFE	1	1577
167.210.03	100	14/23	2.5	PTFE	1	1610
167.210.03A*	100	29/32	2.5	PTFE	1	1703
167.210.05	250	29/32	4	PTFE	1	1881
167.210.06	500	29/32	4	PTFE	1	2185
167.210.07	1000	29/32	6	PTFE	1	3406

* Non DIN



Buy Now!





GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

GLASS

PE

WITH CONE
& SOCKET



Buy Now!

Funnel, Pressure Equalizing, Cylindrical

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With Stem inside cone

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
168.202.01	50	14/23	2.5	Solid Glass	1	1769
168.202.01A	50	29/32	2.5	Solid Glass	1	1868
168.202.02A	100	14/23	2.5	Solid Glass	1	1868
168.202.03A	100	29/32	2.5	Solid Glass	1	2013
168.202.04A	250	29/32	4	Solid Glass	1	2013
168.202.05A	500	29/32	4	Solid Glass	1	2739



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

PTFE

PE

WITH CONE
& SOCKET



Buy Now!

Funnel, Pressure Equalizing, Cylindrical

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With Stem inside cone

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
169.202.01	50	14/23	2.5	PTFE	1	2686
169.202.01A	50	29/32	2.5	PTFE	1	2871
169.202.02A	100	14/23	2.5	PTFE	1	2904
169.202.03A	100	29/32	2.5	PTFE	1	3142
169.202.04A	250	29/32	4	PTFE	1	3142
169.202.05A	500	29/32	4	PTFE	1	3755

Funnels, Pressure Equalizing, Pear Shape

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With Stem inside cone

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
170.202.01	50	14/23	2.5	Solid Glass	1	1663
170.202.02A	100	14/23	2.5	Solid Glass	1	1729
170.202.04A	250	29/32	4	Solid Glass	1	1828
170.202.05A	500	29/32	4	Solid Glass	1	2996



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

GLASS

WITH CONE
& SOCKET

Funnel, Dropping, Pear Shape

- Made from DIN ISO 3585, BORO 3.3 GLASS
- With stem inside cone

Item Code	Capacity (ml)	N/S	Bore (mm)	Stopcock Type	Pack of	Price / Piece
171.202.01	50	14/23	2.5	PTFE	1	2765
171.202.02A	100	14/23	2.5	PTFE	1	3043
171.202.04A	250	29/32	4	PTFE	1	3227
171.202.05A	500	29/32	4	PTFE	1	3868



Buy Now!



DIN
4800

GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

PTFE

WITH CONE
& SOCKET



Funnel, Seperatory

- Made of Polypropylene
- Provides excellent contact clarity & Strength
- Is per shaped & autoclavable
- Has leakproof screw cap threaded
- PP stopcock fit ted with self lubricating PTFE plug, is push fitted to the stem of funnels



Buy Now!

Item Code	Capacity (ml)	Pack of	Price /Pack
181.303.01	100	2	812
181.303.02	250	2	1083
181.303.03	500	2	1354



Funnel, Separatory, Holder

- Made of Polypropylene
- Non-corrosive front opening provides clear view of the solution, Allows unobstructed placement of separating funnels
- Two tapped wedges ensures firm grip on rods having dia ½" or 3/5"

Item Code	Type	Pack of	Price /Pack
114.303.01	Separator Funnel Holder	12	2953



Buy Now!



Funnel, Holder

- Made of Polypropylene
- Are corrosion free
- Can hold funnels with dia 3" to 6"
- Extra plate provided can be placed to hold funnels bearing dia 1" to 3"
- Two tapered wedges ensure firm grip on Rods having dia 1/2" or 3/8"

Item Code	Type	Pack of	Price /Pack
113.303.01	Separator Funnel Holder	12	960



Buy Now!




Gas Generator Apparatus (Kipps)

- Manufactured from 3.3 Borosilicate glass for corrosion-free performance
- Produce common gases
- User-friendly



Buy Now!

Item Code	Extractor Length mm	Pack of	Price /Piece
497.202.01	500	1	11750
497.202.02	1000	1	15211

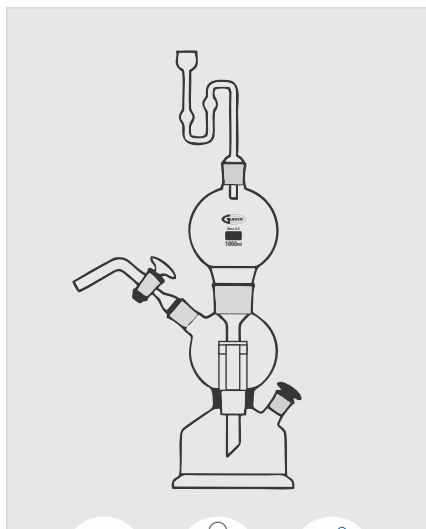


GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



A Glass Apart



www.glasscolabs.com



www.danlogitech.com



STAR PERFORMER

Leading manufacturing company
in the field of scientific glassware

INDIA'S NO.1 EXPORTERS

5 TIMES CAPEXIL AWARD WINNERS

QR-LabGlass™



MANPOWER

EMPLOYEES 950+

MAGNETIC STIRRER WITH HOTPLATE WITH LCD DIGITAL DISPLAY

NEW

- Powerful 1300 W heater, biggest in class, gives results quickly.
- Supplied with Accessories, Probe based thermal control best for direct media temperature control.
- 7X7 inch Glass Cera top supports large vessels upto 5 Ltr.
- Pt1000 for higher accuracy.

RELIABILITY

- Hot Top warning, very safe for users.
- Precise, microcontroller-based temperature control in both C & F
- Indicates errors automatically in Display.
- Interface easy to use.
- Rugged against spillages. Patented spill away design

DURABILITY

- PU coated body, made from AL Alloy gives infinite rust/damage free life.
- Can carry 25 KG weight.
- BLDC motor withstands all voltage fluctuations.

SERVICABILITY & SUPPORT

- Made in India...
- Tech support and Spares readily supported.
- Low down times.
- Value for investment



500B.DNAG.01

Item Code	Volt	Hz	Watts	Price /Piece*
500B.DNAG.01	230	50	1300	Price on Request
500B.DNAG.02	115	60	1300	Price on Request

Accessories:

Item Code	Accessories	Price /Piece
550.500.01	Rod Stainless Steel length 500 mm, Ø 12 mm	2050
550.500.02	Magnetic Stirring bar 25 mm x 8 mm	430
550.500.03	PT 1000 Sensor Probe	6500
550.500.04	Clamp with Boss head	4050

Technical Specification :

Heating Plate Material	Glass Ceramic Top Plate
Dimension of Heating Plate	180 mm x 180 mm
Display Windows	LCD WHITE
Speed Range	~2000 RPM
Heat Output	1300 W
Temperature Range	Ambient to 550°C
Adjustable safety cut off	580°C
Control accuracy of sensor	± 1K
Weight of body	5.2 kgs
Permissible ambient Temp.	5 - 40°C
Permissible relative moisture	80%
Dimensions of Hot Plate Body	378x220x103
IP Class	21

A) Innovative Spill away (Patent Pending) :



Backward Spillage

B) Informative BIG White LCD with set & actual



HEAT
1300W



STIR
2000 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 550 °C



PLATE/ PROBE
SELECTION



***Note :** Stainless Steel Rod, Stirring Bar, PT Sensor & Clamp with Boss Head has to be ordered separately)

MAGNETIC STIRRER WITH HOTPLATE PRO WITH LCD DIGITAL DISPLAY

- Powerful 1300 W heater, biggest in class, gives results quickly.
- Supplied with Accessories, Probe based thermal control best for direct media temperature control.
- 7X7 inch Glass Cera top supports large vessels upto 5 Ltr.
- Pt1000 for higher accuracy.
- Automatic device central mode.
- Temperature reach alarms.
- Timer/Counter option.
- Continuous stir on or off option.

RELIABILITY

- Hot Top warning, very safe for users.
- Precise, microcontroller-based temperature control in both C & F
- Indicates errors automatically in Display.
- Interface easy to use.
- Rugged against spillages. Patented spill away design
- Setting Lock Possible.

DURABILITY

- PU coated body, made from AL Alloy gives infinite rust/damage free life.
- Can carry 25 KG weight.
- BLDC motor withstands all voltage fluctuations.

SERVICABILITY & SUPPORT

- Made in India.
- Tech support and Spares readily supported.
- Low down times.
- Value for investment.

NEW



500P.DNAG.01

Item Code	Volt	Hz	Watts	Price /Piece*
500PDNAG.01	230	50	1300	Price on Request
500PDNAG.02	115	60	1300	Price on Request

Accessories:

Item Code	Accessories	Price /Piece
550.500.01	Rod Stainless Steel length 500 mm, Ø 12 mm	2050
550.500.02	Magnetic Stirring bar 25 mm x 8 mm	430
550.500.03	PT 1000 Sensor Probe	6500
550.500.04	Clamp with Boss head	4050

Technical Specification :

Heating Plate Material	Glass Ceramic Top Plate
Dimension of Heating Plate	180 mm x 180 mm
Display Windows	LCD WHITE
Speed Range	~2000 RPM
Heat Output	1300 W
Temperature Range	Ambient to 550°C
Adjustable safety cut off	580°C
Control accuracy of sensor	± 1K
Weight of body	5.2 kgs
Permissible ambient Temp.	5 - 40°C
Permissible relative moisture	80%
Dimensions of Hot Plate Body	378x220x103
IP Class	21

A) Innovative Spill away (Patent Pending) :



**HEAT
1300W**



**STIR
2000 RPM**



**HEAT/STIR
SELECTION**



**CELSIUS TO
FAHRENHEIT**



**TEMPERATURE
Upto 550 °C**



**PLATE/ PROBE
SELECTION**



***Note :** Stainless Steel Rod, Stirring Bar, PT Sensor, pH Sensor & Clamp with Boss Head has to be ordered separately)

MAGNETIC STIRRER WITH HOTPLATE WITH LCD DIGITAL & PRO+ WITH WIFI Based Lab-connect

- WIFI variant adds value **Labs-Connect** useful for private non pharma labs.
- Powerful 1300 W heater, biggest in class, gives results quickly.
- Supplied with Accessories, Probe based thermal control best for direct media
- temperature control, pH electrode for pH based alarms.
- 7X7 inch Glass Cera top supports large vessels upto 5 Ltr.
- CERA click quick removal of top plate.
- Lock Key on panel for settings.

RELIABILITY

- Hot Top warning, very safe for users.
- Precise, microcontroller-based temperature control in both C & F
- Indicates errors automatically in Display.
- Interface easy to use.
- Rugged against spillages. Patented spill away design.

DURABILITY

- PU coated body, made from AL Alloy gives infinite rust/damage free life.
- Can carry 25 KG weight.
- BLDC motor withstands all voltage fluctuations.

SERVICABILITY & SUPPORT

- Patented Cera Click system for quick service.
- Made in India... Tech support and Spares readily supported.
- Low down times.
- Value for investment

Item Code	Volt	Hz	Watts	Price /Piece*
500PPDNDG.01	230	50	1300	Price on Request
500PPDNDG.02	115	60	1300	Price on Request

Accessories:

Item Code	Accessories	Price /Piece
550.500.01	Rod Stainless Steel length 500 mm, Ø 12 mm	2050
550.500.02	Magnetic Stirring bar 25 mm x 8 mm	430
550.500.03	PT 100 sensor probe	6500
550.500.04	Clamp with Boss head	4050
550.500.07	pH Electrode	-



500PP.DNDG.01

Technical Specification :

Heating Plate Material	Glass Ceramic Top Plate
Dimension of Heating Plate	180 mm x 180 mm
Display Windows	LCD WHITE
Speed Range	~2000 RPM
Heat Output	1300 W
Temperature Range	Ambient to 550°C
Adjustable safety cut off	580°C
Control accuracy of sensor	± 1K
Weight of body	5.2 kgs
Permissible ambient Temp.	5 - 40°C
Permissible relative moisture	80%
Dimensions of Hot Plate Body	378x220x103
IP Class	21

A) Innovative Spill away (Patent Pending) :



B) Innovative CeraClick-System™ (Patent Pending):

Replacing of Glass Ceramic Plate



HEAT
1300W



STIR
2000 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 550 °C



PLATE/ PROBE
SELECTION

UL
RATED SAFETY

CE



**Note : Stainless Steel Rod, Stirring Bar, PT Sensor, pH Sensor & Clamp with Boss Head has to be ordered separately)*

GLASS CERAMIC TOP

Magnetic Stirrer with Hotplate

- Powerful 1300 W heater, biggest in class, gives results quickly
- Supplied with Accessories, Probe based thermal control best for direct media temperature control, pH electrode for pH based alarms
- PU Coated Aluminium Alloy Moulded Construction
- Highly scratch and chemical resistant Top
- Even heat distribution on surface of Top
- Large top plate to assist beaker upto 5000 ml
- High Magnetic strength
- Single multi-turn intelligent knob operation
- User settable High temperature cutoff and hard wired cutoff
- Selection of Celsius and Fahrenheit
- Selection of hot plate and probe temperature
- High temperature upto 550°C possible
- Thermal insulation for cool body operation
- Installed with double temperature sensors for safety & fail safe operating mechanism
- Inclusive PT 100 temperature sensor probe
- Digital set up temperature controller with independent LED display
- DIN connector for external temperature probe
- Error code display
- 7X7 inch Glass Cera top supports large vessels upto 5 Ltr.



500.DNAG

Item Code	Volt	Hz	Watts	Price /Piece*
500.DNAG.01	230	50	1300	Price on Request



Buy Now!

Accessories:

Item Code	Accessories	Price /Piece
550.500.01	Rod Stainless Steel length 500 mm, Ø 12 mm	2050
550.500.02	Magnetic Stirring bar 25 mm x 8 mm	430
550.500.03	PT 100 sensor probe	6500
550.500.04	Clamp with Boss head	4050

Extra Accessories:

Item Code	Accessories	Price /Piece
550.500.05	Glass Ceramic top plate	20150
550.500.06	Knobs	120

Technical Specification :

Heating Plate Material	Glass Ceramic Top Plate
Dimension of Heating Plate	180 mm x 180 mm
Two display windows for	Temperature and RPM
Speed Range	~2000 RPM
Heat Output	1300 W
Temperature Range	Ambient to 550°C
Adjustable safety cut off	580°C
Control accuracy of sensor	± 1K
Weight of body	5.2 kgs
Permissible ambient Temp.	5 - 40°C
Permissible relative moisture	80%
USB Port	Yes (For Programming)
Dimensions of Hot Plate Body	378x220x103
IP Class	21

A) Innovative Spill away (Patent Pending) :



HEAT
1300W



STIR
2000 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 550 °C



PLATE/ PROBE
SELECTION



***Note :** Stainless Steel Rod, Stirring Bar, PT Sensor & Clamp with Boss Head has to be ordered separately)

MAGNETIC STIRRER WITH HOTPLATE DIGITAL & PRO (pH) CeraClick-System™

- Powerful 1300 W heater, biggest in class, gives results quickly.
- Supplied with Accessories, Probe based thermal control best for direct media temperature control, pH electrode for pH based alarms.
- 7X7 inch Glass Cera top supports large vessels upto 5 Ltr.
- CERA click quick removal of top plate.
- WIFI variant adds value labs connect useful for private non pharma labs.

RELIABILITY

- Hot Top warning, UL/CSA certified, very safe for users.
- Precise, microcontroller-based temperature control in both C & F
- Indicates errors automatically in Display.
- Interface easy to use and rugged against spillages. Patented spill away design

DURABILITY

- PU coated body, made from AL Alloy gives infinite rust/damage free life.
- Can carry 20 KG weight. Rugged Motor withstands all voltage fluctuations.

SERVICABILITY & SUPPORT

- Patented Cera Click system for quick service.
- Made in India... Tech support and Spares readily supported.
- Low down times. Value for investment



500.DNDG

Item Code	Volt	Hz	Watts	Price /Piece*
500.DNDG.01	230	50	1300	Price on Request

Accessories:

Item Code	Accessories	Price /Piece
550.500.01	Rod Stainless Steel length 500 mm, Ø 12 mm	2050
550.500.02	Magnetic Stirring bar 25 mm x 8 mm	430
550.500.03	PT 100 sensor probe	6500
550.500.04	Clamp with Boss head	4050
550.500.07	pH Electrode	-

Extra Accessories:

Item Code	Accessories	Price /Piece
550.500.05	Glass Ceramic top plate	20150
550.500.06	Knobs	120

Technical Specification :

Heating Plate Material	Glass Ceramic Top Plate
Dimension of Heating Plate	180 mm x 180 mm
Two display windows for	Temperature and RPM
Speed Range	~2000 RPM
Heat Output	1300 W
Temperature Range	Ambient to 550°C
Adjustable safety cut off	580°C
Control accuracy of sensor	± 1K
Weight of body	5.2 kgs
Permissible ambient Temp.	5 - 40°C
Permissible relative moisture	80%
USB Port	Yes (For Programming)
Dimensions of Hot Plate Body	378x220x103
IP Class	21
Motor	BLDC

A) Innovative Spill away (Patent Pending) :



B) Innovative CeraClick-System™ (Patent Pending):

Replacing of Glass Ceramic Plate



HEAT
1300W



STIR
2000 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 550 °C



PLATE/ PROBE
SELECTION



**Note : Stainless Steel Rod, Stirring Bar, PT Sensor, pH Sensor & Clamp with Boss Head has to be ordered separately)*

CERAMIC COATED STAINLESS STEEL TOP

Magnetic Stirrer with Hotplate - Digital

- Powerful 650W Heater Heat Evenly, rapidly & given result quickly
- PU Coated Aluminium Alloy Moulded Construction
- Auto Power "ON" possible
- Ceramic coated top plate, chemically resistant and scratch resistant
- Even heat distribution
- Large top plate to assist beakers upto 2000 ml
- Single multi-turn intelligent knob Operation
- High magnetic strength
- Digital set up with independent displays
- Selection of Celsius or Fahrenheit
- Selection of hot plate or probe temperature control.
- Settable safety cut-off for maximum temperature limit for top plate or probe
- Installed with double PT sensors for safety & fail safe operating mechanism
- Only with Battery for domestic
- Inclusive PT 100 temperature sensor probe
- Digital setup of RPM with independent display
- Digital setup of time with independent display
- Count-up indication of minutes and hours
- Audible alarm at time cycle end for safety and ease of unsupervised operation
- Error code display for failures



900.DNDG

Item Code	Volt	Hz	Watts	Top Plate	Price /Piece*
900.DNDG.01	230	50	650	Polished Stainless Steel with Ceramic Coated	Price on Request

Technical Specification :

Heating Plate Material	Ceramic Coated Stainless Steel
Dimension of Heating Plate	Ø 150 mm
Three display windows for	Temp., RPM and Time
Speed Range	50-1500 RPM
Maximum Stirring bar Length	upto 80mm bar (at lower speed)
Temperature Range	Ambient to 350°C Approx.
Adjustable safety cut off	50-400°C
Control accuracy of PT 100	± 1K
Weight of body	3.2 kgs
Dimension of Hot Plate	273x160x102mm
Permissible ambient Temp.	5-40°C
Permissible relative moisture	80%
RS 232 Interface	Yes (For Programming)
Weight of Capacity	20 Ltr
IP Class	32

Accessories:

Item Code	Accessories	Price /Piece
850.800.01	Rod Stainless Steel Length 400mm, Ø 12mm	2700
850.800.02	Magnetic Stirring bar 35mmx8mm	465
850.800.03	Moulded PT 100 Sensor	6500
850.800.04	Boss head	4050

***Note : Stainless Steel Rod, Stirring Bar, PT Sensor & Boss Head has to be ordered separately)**



ALUMINIUM ALLOY CERAMIC COATED TOP (For Adaptors)

Magnetic Stirrer with Hotplate - Digital

- Powerful 650W Heater Heat Evenly, rapidly & given result quickly
- PU Coated Aluminium Alloy Moulded Construction
- Auto Power "ON" possible
- Chemically resistant keypad
- Even heat distribution at faster rate
- Thermal insulation for cool body operation
- Digital set up temperature controller with independent LED display
- Set safety cut-off for maximum temperature limit for top plate or probe
- Installed with double PT sensors for fail safe operating mechanism
- Only with Battery for domestic
- Inclusive PT 100 temperature sensor probe
- Audible alarm at time cycle end for safety and ease of unsupervised operation
- Top plate Ø 145 mm to assist beaker upto 2000 ml & Adapter.
- Compatible for use with all major brands top assemblies 1 Cavity, 3 Cavities or Multiple Cavities
- Digital setup of time with independent LED display
- Selection of plate and probe temperature
- Error code display for failures
- Digital setup of RPM with independent LED display
- Count-up indication of minutes and hours
- Single multi-turn intelligent knob Operation
- Selection of Celsius and Fahrenheit
- High magnetic strength



Item Code	Volt	Hz	Watts	Top Plate	Price /Piece
610.DNDG.01	230	50	650	Aluminum Ceramic Coated	Price on Request



Buy Now!

* Above price exclude aluminum flask adapter

Technical Specification :

Heating Plate Material	Aluminium Alloy with Ceramic Coating
Dimension of Heating Plate	Ø 145/Ø 135 mm
Three display windows for	Temp., RPM and Time
Speed Range	50-1500 RPM
Maximum Stirring bar Length	upto 80mm bar (at lower speed)
Temperature Range	Ambient to 350°C
Adjustable safety cut off	50-400°C
Control accuracy of PT 100	± 1K
Weight of body	3.1 kgs
Dimension of Hot Plate	273x160x102mm
Permissible ambient Temp.	5-40°C
Permissible relative moisture	80%
RS 232 Interface	Yes (For Programming)
Weight of Capacity	20 Ltr
IP Class	32



Included Accessories:

Item Code	Accessories	Price /Piece
850.800.01	Rod Stainless Steel Length 400mm, Ø 12mm	2700
850.800.02	Magnetic Stirring bar 35mmx8mm	465
850.800.03	Moulded PT 100 Sensor	6500
850.800.04	Boss head	4050

* Above price exclude aluminum flask adapter

Item Code	Accessory (Aluminum Adapter for Round Bottom Flasks)	Flask Capacity (ml)	Places	Price /Piece
610.ADP00		10 ml	8	16675
610.ADP01		25 ml	7	16675
610.ADP02		50 ml	4	16675
610.ADP03		100 ml	1	16675



STAINLESS STEEL/ALUMINIUM ALLOY CERAMIC COATED TOP

Magnetic Stirrer with Hotplate - Analog

- PU Coated Aluminium Alloy Moulded Construction
- Easy temperature & Stir controls
- Installed with Safety PT sensor for fail safe operation.
- Hot top indicator for temperatures above 50°C.
- Large top plate to assist beakers upto 2000 ml.
- High magnetic strength.
- Electronic variable speed control with Knob for display.
- Knob for regulating variable temperature.
- Heat reach Indicator, To ensure you correct temperature of plate surface.
- Stirring & temperature indicator
- Error indicators for heat & Stir function inbuilt trouble shoot

Item Code	Volt	Hz	Watts	Top Plate	Price / Piece
710.DNAG.01	230	50	650	SS Ceramic Coated	18400
610.DNAG.01	230	50	650	Aluminum Ceramic Coated	18100



Buy Now!



710.DNAG

Technical Specification :

Heating Mantle Material	: Stainless Steel 304 Grade with Ceramic Coating/Aluminum Alloy with Ceramic Coating
Dimension of heating plate	: Ø145 (For 610DNAG) Ø150 (For 710DNAG)
Speed range	: 50-1600 RPM
Maximum stirring bar Length	: Can use upto 80 mm bar (at lower speed)
Temperature Range	: Ambient to 350°C approx
Dimensions of hot plate body	: 273x160x102mm
Weight of body	: 3.0 kgs
Permissible ambient Temperature	: 5- 40 °C
Permissible relative moisture	: 80%
Weight of Capacity	: 20 Ltr
IP Class	: 22

Included Accessory:

Cat. No.	Accessories
850.800.02	Magnetic Stirring bar 35 mm x 8 mm



HEAT
650W



STIR
1600 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 350 °C



STAINLESS STEEL CERAMIC COATED TOP

Hotplate - Analog

- Powerful 650W Heater Heat Evenly, rapidly & given result quickly
- PU Coated Aluminium Alloy Moulded Construction
- Easy Temperature control
- Hot top indicator for temperatures above 50°C
- Large top plate to assist beakers upto 2000 ml
- Heat reach Indicator, To ensure you correct temperature of plate surface
- Temperature Indicator

Item Code	Volt	Hz	Watts	Top Plate	Price / Piece
730.DNAG.01	230	50	30	Stainless Steel top with Ceramic Coating	19800



Buy Now!



730.DNAG

Technical Specification :

Heating Mantle Material	: Stainless Steel 304 Grade/ Ceramic Coated
Dimension of heating plate	: 150 Ø
Temperature Range	: Ambient to 350°C approx
Dimensions of hot plate body	: 273x160x102mm
Weight of body	: 2.0 kgs
Permissible ambient Temperature	: 5- 40 °C
Permissible relative moisture	: 80%
Weight of Capacity	: 30 Ltr
IP Class	: 22



**HEAT
650W**



**HEAT
SELECTION**



**CELSIUS TO
FAHRENHEIT**



**TEMPERATURE
Upto 350 °C**



STAINLESS STEEL TOP

Magnetic Stirrer - Analog



Buy Now!

720.DNAG



- PU Coated Aluminium Alloy Moulded Construction
- Easy Stir controls
- Large top plate to assist beakers upto 2000 ml.
- Maximum stirring speed upto 1600 RPM.
- High magnetic strength.
- Knob for electronic variable speed control with display.
- Stirring Indicator.
- Error displays & safety for Stir function built in.

Item Code	Volt	Hz	Watts	Top Plate	Price / Piece
720.DNAG.01	230	50	30	Stainless Steel	17800

Technical Specification :

Operating Voltage	: 230V/115V AC, 50/60 Hz
Power	: 30 Watts $\pm$ 10%
Weight	: 2.6 Kgs
Dimensions of Top plate	: Diameter 150mm
Over all dimensions	: 273X160X102mm
Fuse internal	: 1 Amps
Stirring Capacity	: 10 L
Weight of Capacity	: 30 Ltr
IP Class	: 22



STAINLESS STEEL LARGE TOP

Magnetic Stirrer - Analog



Buy Now!

725.DNAG



- PU Coated Aluminium Alloy Moulded Construction
- Easy Stir controls
- Large top plate to assist beakers upto 5000 ml.
- Maximum stirring speed upto 1600 RPM.
- High magnetic strength.
- Knob for electronic variable speed control with display.
- Stirring Indicator.
- Error displays & safety for Stir function built in.

Item Code	Volt	Hz	Watts	Top Plate	Price / Piece
725.DNAG.01	230	50	30	Stainless Steel	18200

Technical Specification :

Operating Voltage	: 230V/115V AC, 50/60 Hz
Power	: 30 Watts $\pm$ 10%
Stirring Capacity	: Upto 1600 RPM
Weight	: 3.0 Kgs
Dimensions of Top plate	: 190X25mm Octagon shape
Over all dimensions	: 275 mm X 190mm X 92mm
Fuse internal	: 1 Amps
Stirring Capacity	: 20000ml
Weight of Capacity	: 30 Ltr
IP Class	: 22



Dry Block Heater

NEW

- PU coated aluminium alloy body construction ensures durability
- Interchangeable aluminum alloy sample blocks provide versatility and allow for easy cleaning and disinfecting
- Precise temperature control with PID circuit
- Digital controls and display of time and temperature
- Built-in temperature sensing probe for outstanding temperature accuracy and control
- Timer allows the user to accurately monitor the heating time

Item Code	No of Block	Volt	Hz	Watts	Price / Piece
740.DNEU.01	1	230	50	170	Price on Request
750.DNEU.01	2	230	50	340	Price on Request



Single Block



Double Block

740.DNEU/750.DNEU

Technical Specification :

	Single block heater	Double block heater
Number of blocks	1	2
Heat output	170	340
Heating temperature range [°C]	120°C	120°C
Temperature display	YES	YES
Adjustment & display resolution [K]	1	1
Connection for ext. temp sensor	DIN	DIN
Temperature sensor	Pt1000	Pt1000
Temperature stability within the blocks at 37°C * [°C]	?	?
Temperature stability within the blocks at 60°C * [°C]	?	?
Temperature Homogeneity @ 37°C * [K] 0.2	?	?
Temperature Homogeneity @ 60°C * [K] 0.4	?	?
Heating rate / Heat up time with external sensor * [K/min]	?	?
Set-up plate material	Aluminium alloy	Aluminium alloy
Set-up plate dimensions [mm]	95*76*51	95*76*51 (2 block)
Fixed safety circuit [°C]	130	130
Timer	YES	YES
Time setting range [min]	1 - 5999	1 - 5999
Counter	YES	YES
Counter setting range [min]	1 - 5999	1 - 5999
Dimensions (W x H x D) [mm]	160*80*271	163*106*332
Weight [kg]	2.8 kg (Approx.)	
Permissible ambient temp[°C]	5°C - 40°C	5°C - 40°C
Permissible relative humidity [%]	80	80
Protection class according to DIN EN 60529	IP 21	IP 21
Voltage [V]	220 - 240V	220 - 240V
Frequency [Hz]	50/60Hz	50/60Hz
Power input [W]	170W	340W

Accessories:

Item Code	Accessories	Price /Piece
	Blocks	
	Probe	

3 POSITION MAGNETIC STIRRER WITH HOTPLATE

- PU Coated Mild Steel construction
- Three independently controlled stirring/heating positions.
- Powerful magnets for strong magnetic coupling.
- Easy temperature & Stir controls.
- Installed with Safety PT sensor for fail safe operation.
- LED hot top indicator for temperatures above 50°C for each station.
- Electronic variable speed control with Knob for display.
- Knob for regulating variable temperature.
- Heat reach Indicator, To ensure you correct temperature of plate surface.
- Stirring Indicator
- LED error code displays & safety for heat & Stir function inbuilt trouble shoot.



716.DNAG.01

Item Code	Volt	Hz	Watts	Top Plate	Price /Piece
716.DNAG.01	230	50	(450x3) 1350	SS	Price on Request

Technical Specification :

Heating plate material	Stainless Steel
Dimension of heating plate	150 Ø RPM
Volume cap.	2000ml each station
Speed range	1600 RPM
Stirring position	3
Maximum stirring range	Can use upto 80mm bar Lower speed
Maximum plate temperature	350 °C
Overall dimensions (mm)	505 x 246 x 195 (LxWxH)
Plate dimensions (mm)	504 x 175 x 30 (LxWxH)
Net weight (kg)	7.0 kg (Approx.)
Permissible ambient temp.	5-40 °C
Permissible relative humidity	80%
IP Class	21



HEAT
1350W



STIR
1600 RPM



HEAT/STIR
SELECTION



CELSIUS TO
FAHRENHEIT



TEMPERATURE
Upto 350 °C

DIGITAL FLAT STIRRER

- Unibody design gives IP65 performance
- Ultra-flat compact magnetic stirrer, guaranteed with modern magnet coil technology.
- Wear-free drive with no moving parts.
- 7 Stirring modes for better mixing
- Moterless, No Noise
- Fail proof, Long working

Product Features

- Set-up plate and casing made from chemically resistant materials
- Slip-proof, safe stand
- Max. stirring quantity (H₂O): 800 ml
- Speed range: 10 - 1500 rpm



430.DNDG.01

Model No.	V	Hz	Price/Piece
430.DNDG.01	100-240	50	12500



Buy Now!

Technical Specification :

Number of stirring positions	1
Stirring quantity max. per stirring position (H ₂ O)	0.8 l
Speed Range	10 - 1500 rpm
Stirring Bar Length Max.	25 mm x 8 mm
Set-up Plate Material	polyester
Set-up plate dimensions	Ø 100 mm
Dimensions (W x H x D)	122 x 12 x 182 mm
Weight	450 Gms
Permissible Ambient Temperature	5 - 40 °C
Permissible Relative Humidity	80 %
Voltage	100 - 240 V
Frequency	50/60 Hz
Power input	6 W
Weight of Capacity	10Kg
IP Class	65



STIR
1500 RPM



TIMER
00:01-99:59



STIR/TIME
DISPLAY



7 MODE
CHOICES



MAGNETIC STIRRER-DIGITAL

- Large display allow viewing from distance
- Powerful magnet stirrer large volume
- Acceleration adjust for volume & viscosity combination
- Auto power 'ON' possible
- Detachable wire & wireless remote add value for placing under large vessel
- SS 304 construction
- Large surface to assist large vessels upto 20, 30 40 & 50L
- High magnetic strength
- Electronic variable speed control
- Independent display for RPM & Time
- Choice of 7 modes of rotation
- Power adjust feature
- Optional remote



450.DNDG

Item Code	Volt	Hz	Watts	Cap. (Ltr.)	Top Plate	Price /Piece
420.DNDG.01	100-240	50/60	50	20	SS 304 Grade	Price on Request
440.DNDG.01	100-240	50/60	50	40	SS 304 Grade	Price on Request
450.DNDG.01	100-240	50/60	50	50	SS 304 Grade	Price on Request
4100.DNDG.01	100-240	50/60	50	100	SS 304 Grade	Price on Request
4200.DNDG.01	100-240	50/60	50	200	SS 304 Grade	Price on Request

Technical Specification :

Speed range	100 - 2000 rpm
Timer range	0:01 to 99:59 (HH:MM)
Stirring power mode	50%,75%,100%
Acceleration mode	Yes
Timer bypass	Yes
Display type	Led segment
Stirring power (max.)	50W
Operating voltage	24VDC
Power supply	100-240 VAC / 50-60 Hz / 2A
Dimensions (WxDxH)	370x415x115mm
Weight Approx.	11Kg
Material Housing	Stainless steel-304
Permitted operation conditions	5 to 40 °C (at 80% humidity)
Protection category	IP20

Accessories:

Item Code	Accessories	Price /Piece
	Remote (Wired)	
	Remote IR (Wireless)	



**STIR
2000 RPM**



**STIR MODES
SELECTION**



**INFRARED
SENSOR**



**OPTIONAL
REMOTE**



**7 MODE
SELECTION**



**POWER
SELECT**



5-POSITION MAGNETIC STIRRER WITH HEATING-DIGITAL

- Robust Metallic Construction
- Designed for synchronous heating and stirring
- Suitable for continuous unsupervised operation
- Silicone mat for anti-skid.
- The magnetic coil motorless technology provides noiseless and consistent stirring on all positions
- Homogeneous temperature distribution across the heating plate
- Hot top warning indication
- Timer function & Auto power 'ON' possible
- Multiple modes with mode selection key
- Constant stirring speeds even with viscosity changes
- SPC-mode for a low self-warming of the surface
- Error codes display
- Can be operated with **Labs-connect App** over Wifi/USB Controls

Model No.	V	W	Hz	Price /Piece
411.DNWDG.01	230	220	50	Price on Request
411.DNDG.01	230	220	50	Price on Request

Technical Specification :

Set-up plate material	Aluminium
Silicone Mat	Yes
Number of stirring positions	5
Stirring position distance	90 mm
Speed range	0 - 1000 rpm
Speed control	10 RPM Steps
Stirring quantity max.	2L
Stirring bar length max.	30mm x 8mm
Heating temperature range	Room temp. - 120°C
Control display	LED
Input Type	Key Button
Adjustable safety circuit min.	50°C
Adjustable safety circuit max.	130°C
Timer range	00:01 to 99:59 [HH: MM]
Set-up plate dimensions	514x122mm
Dimensions (W x H x D)	600 x 120 x 80 mm
Weight	4.4 (Approx.)
Permissible ambient temperature	5 - 40 °C
Permissible relative humidity	80 %
Protection class according to DIN EN 60529	Ip40

Included Accessories: (For 411.DNDG)

Cat. No.	Accessories
1500.150.01	(5) Magnetic Stirring bar 30mm x 8mm



Buy Now!



411.DNWDG.01
(With WiFi)



STIR
1000 RPM



HEAT & STIR
SETUP



TEMPERATURE
Upto 120 °C



6
MODE
CHOICES



15-POSITION DIGITAL MAGNETIC STIRRER WITH HEATING

- Robust Metallic Construction
- Suitable for continuous unsupervised operation
- Designed for synchronous heating and stirring
- The magnetic coil motorless technology provides noiseless and consistent stirring on all positions
- Homogeneous temperature distribution across the heating plate
- Hot top warning indication
- Timer function
- Adjustable reverse operation for stirring
- Stirring speed remains constant, even when load changes
- SPC-mode for a low self-warming of the surface
- Multiple operating modes selection
- Error codes display
- Continuous stir modes possible
- Can be operated with **Labs-connect App** over Wifi/USB Controls
- Double ventilation for inside to keep for long unsupervisonal use
- Auto power 'ON' possible

Item Code	Volt	Hz	Watts	Price /Piece
415.DNWDG.01	230	50	750	Price on Request
415.DNDG.01	230	50	750	Price on Request
414.DNDG.01	230	50	50	Price on Request



Buy Now!



415.DNDG.01

*Also available
without Temperature*

Technical Specification :

Set-up plate material	: Aluminum
Silicone mat	: Yes
Number of stirring positions	: 15
Stirring position distance	: 90 mm
Speed range	: 0 - 1000 rpm
Speed control	: 10 RPM Steps
Stirring quantity max. (H ₂ O)	: 6L (400mlx15)
Stirring bar length max.	: 30mm x 8mm
Heating temperature range	: Room temp. to 120°C
Display type	: LED
Input Type	: Key Button
Adjustable safety circuit min.	: 50°C
Adjustable safety circuit max.	: 130°C
Timer range	: 00:01 to 99:59 [Hour: Minute]
Set-up plate dimensions	: 274x504mm
Dimensions (W x H x D)	: 281x81x609mm
Weight	: 10.6 Kg (Approx.)
Permissible ambient temperature	: 5 - 40 °C
Permissible relative humidity	: 80 %
Protection class according to DIN EN 60529	: IP40



414.DNDG.01

Included Accessories:

Item Code	Accessories
1500.150.02	(15) magnetic Stirring bar 30mm x 8mm



6 MODE
CHOICES



STIR
1000 RPM



TIMER
00:01-99:59



TEMPERATURE
Upto 120 °C



CELSIUS &
FAHRENHEIT



HEAT/STIR/TIME
DISPLAY



CONTINUOUS
STIR MODE KEY



HEATING MANTLE-ANALOG

BlackDiamond™



- PU Coated Aluminium & Stainless Steel construction
- Simply set power knob to attained selected values
- Designed for advanced Laboratory usage
- SS & Aluminium Construction
- For Round Bottomed Flasks as per DIN - 12347
- Glass fibre yarn knitted mantle provides uniform heating to flask
- Predictable electronic power regulator
- Provision to attach accessories
- Innovative spill collect system enables collection of spillage in case of breakage of flasks upto 5 Ltr
- Fewer parts give longer life
- Easy to use and maintain

1220.DNEU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension (WxDxH)	Price / Piece
1220.DNEU.01	100*	200	167x240x182	9870
1220.DNEU.02	250*	200	167x240x182	9870
1220.DNEU.03	500*	250	217x287x203	11025
1220.DNEU.04	1000*	350	217x287x203	11025
1220.DNEU.05	2000*	500	309x390x262	14175
1220.DNEU.06	3000*	500	309x390x262	14175
1220.DNEU.08	5000*	650	309x390x262	14910
1220.DNEU.09	6000	650	-	Price on Request
1220.DNEU.10	10000	1250	-	Price on Request
1220.DNEU.11	20000	1850	-	Price on Request



Buy Now!



Spill collect system

*For lower volumes only.

The spill protect feature is provided in models upto 5000ml.

Technical Specification :

Heating Mantle Body	Metallic, SS & Aluminium construction
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 20000ml (as per DIN 12347)
Temperature Range	~400°C
Control Accuracy	10%
Heating Control	Variable
Weight	1.7 Kgs
Permissible Ambient Temperature	5- 40 °C
Permissible relative moisture	80%
IP Class	10

Optional Accessories

Item Code	Accessories
850.800.01	SS Rod (542mm, Ø 9mm) Bosshead



HEAT
200-1850W



TEMPERATURE
Upto 400 °C



CAPACITY
Upto 100-20000ml



HEATING MANTLE-DIGITAL

BlackDiamond™



- PU Coated Aluminium & Stainless Steel construction
- Designed for advanced Laboratory usage
- Control the temperature of subject in flask using probe
- Temperature control with digital display
- Celsius/Fahrenheit selection
- Mantle/Probe selection
- SS & Aluminium Construction
- For Round Bottomed Flasks as per DIN - 12347
- Glass fibre yarn knitted mantle provides uniform heating to flasks
- Innovative spill collect system enables collection of spillage in case of breakage of flasks
- Fewer parts give longer life
- Easy to use and maintains
- Provision to attach accessories
- Auto Power 'ON' possible
- Glass fibre Insulation saves power wastage
- Probe based low temperature of liquid



1222.DNEU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension (WxDxH)	Price / Piece
1222.DNEU.01	100*	200	167x240x182	16050
1222.DNEU.02	250*	200	167x240x182	16050
1222.DNEU.03	500*	250	217x287x203	17548
1222.DNEU.04	1000*	350	217x287x203	17548
1222.DNEU.05	2000*	500	309x390x262	24075
1222.DNEU.06	3000*	500	309x390x262	24075
1222.DNEU.08	5000*	650	309x390x262	24075



Buy Now!



Spill collect system

Technical Specification :

Heating Mantle Body	Metallic, SS & Aluminium construction
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 6000ml
Heating Control	Microprocessor based PID
Temperature Range	~400°C
Control Accuracy	10%
Weight	2.4 Kgs
Permissible Ambient Temperature	5- 40 °C
Permissible relative moisture	80%
IP Class	10

Included Accessories:

Item Code	Accessories	Price /Piece
850.800.01	Rod Stainless Steel Length 542mm, Ø 9mm	2700
850.800.03	Moulded PT 100 Sensor	6500
850.800.04	Boss head	4050



HEAT
200-650W



TEMPERATURE
Upto 400 °C



CAPACITY
Upto 5000ml



HEAT
KNOB



CELSIUS TO
FAHRENHEIT



HEATING MANTLE WITH STIRRER - ANALOG

BlackDiamond™

- PU Coated Aluminium & Stainless Steel construction
- Designed for advanced Laboratory usage
- SS & Aluminium Construction
- For Round Bottomed Flasks as per DIN - 12347
- Glass fibre yarn knitted mantle provides uniform heating to flasks
- Predictable electronic power regulator
- Knob for stir speed control upto 800 RPM
- Innovative spill collect system enables collection of spillage in case of breakage of flasks
- Fewer parts give longer life
- Easy to use and maintain
- Provision to attach accessories



1223.DNEU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension	Price / Piece
1223.DNEU.01	100	220	167x240x182	15450
1223.DNEU.02	250	220	167x240x182	15450
1223.DNEU.03	500	270	217x287x203	15450
1223.DNEU.04	1000	370	217x287x203	16686
1223.DNEU.05	2000	520	309x390x262	20085
1223.DNEU.06	3000	520	309x390x262	20085
1223.DNEU.08	5000	670	309x390x262	20085



Buy Now!



Spill collect system

The spill protect feature is provided in models upto 5000ml.

Technical Specification :

Heating Mantle Body	Metallic, SS & Aluminium construction
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 5000ml
Temperature Range	~400°C
Control Accuracy	10%
Variable speed range	~800 RPM
Weight	2.5 Kgs
Permissible Ambient Temperature	5- 40 °C
Permissible relative moisture	80%
IP Class	10

Included Accessories

Item Code	Accessories
1500.150.01	Magnetic Stirring bar 20mmx8mm (For 100-1000ml)
1500.150.02	Magnetic Stirring bar 25mmx9mm (For 2000-5000ml)



HEAT
220-670W



TEMPERATURE
Upto 400 °C



STIR
800 RPM



HEAT & STIR
KNOBS



HEATING MANTLE WITH STIRRER-DIGITAL

BlackDiamond™

- PU Coated Aluminium & Stainless Steel construction
- Designed for advanced Laboratory usage
- Control the temperature of subject in flask using probe
- Temperature control with digital display built in magnetic stirring
- Celsius/Fahrenheit selection
- Mantle/Probe selection
- SS & Aluminium Construction
- For Round Bottomed Flasks as per DIN - 12347
- Glass fibre yarn knitted mantle provides uniform heating to flasks
- Innovative spill collect system enables collection of spillage in case of breakage of flasks
- Fewer parts give longer life & Easy to use and maintains
- Provision to attach accessories
- Electronic stir speed control
- Glass fibre Insulation saves power wastage
- Auto Power 'ON' possible



1221.DNEU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension	Price / Piece
1221.DNEU.01	100	220	167x240x182	24198
1221.DNEU.02	250	220	167x240x182	23976
1221.DNEU.03	500	270	217x287x203	25641
1221.DNEU.04	1000	370	217x287x203	25641
1221.DNEU.05	2000	520	309x390x262	30525
1221.DNEU.06	3000	520	309x390x262	31080
1221.DNEU.08	5000	670	309x390x262	33300



Buy Now!



Spill collect system

The spill protect feature is provided in models upto 5000ml.

Technical Specification :

Heating Mantle Body	Metallic, SS & Aluminium construction
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 5000ml
Heating Control	Microprocessor based PID
Stir Control	Microprocessor based
Temperature Range	~400°C
Control Accuracy	10%
Weight	2.5 Kgs
Variable Speed Range	~800 RPM
Permissible Ambient Temperature	5- 40 °C
Permissible relative moisture	80%
IP Class	10

Included Accessories

Item Code	Accessories
1500.150.01	Magnetic Stirring bar 20mmx8mm (For 100-1000ml)
1500.150.02	Magnetic Stirring bar 25mmx9mm (For 2000-5000ml)
850.800.01	SS Rod (542mm, Ø 9mm)
850.800.03	Moulded PT 100 Sensor probe
850.800.04	Bosshead



ADVANCED HEATING MANTLE WITH STIRRER

BlackDiamond™ PRO

With
STIRRER


- PU Coated Aluminium & Stainless Steel construction
- Setable temperature trigger to sound alarm
- Infinite stirring/ time provided also
- Designed for advanced Laboratory usage
- SS & Aluminium Construction
- For Round Bottomed Flasks as per DIN - 12347
- Single shuffle knob to set temperature, stir speed & time of activity
- Independent keys for C/F selection & mantle/probe selection
- Accurately Control liquid temp. with included PT 100 sensor probe
- Glass fibre yarn knitted mantle provides uniform heating to flasks
- Innovative spill collect system enables collection of spillage in cases of breakage of flasks
- Probe based prescribed control of liquid
- Auto Power 'ON'
- Rugged SP motor



1225.DNEU



Buy Now!

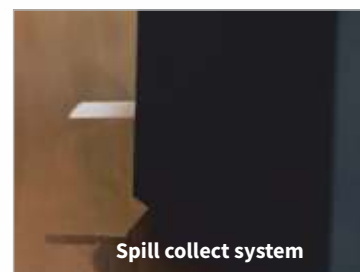

Spill collect system

The spill protect feature is provided in models up to 5000ml.

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension	Price / Piece
1225.DNEU.01	100	220	240x315x203	28016
1225.DNEU.02	250	220	240x315x203	28016
1225.DNEU.03	500	270	240x315x203	28325
1225.DNEU.04	1000	370	240x315x203	28325
1225.DNEU.05	2000	520	309x390x262	32703
1225.DNEU.06	3000	520	309x390x262	32703
1225.DNEU.08	5000	670	309x390x262	33784

Technical Specification :

Operating voltage	230VAC/50Hz
Display type	LED segment
Temperature range	~400 °C
Temperature step size	1°C
Temperature resolution	±1°C
Stir range	50 to 800RPM
Stir step size	50RPM
Weight	3.2 Kgs
Timer range	00:01 to 99:59
Timer step size	00:01
External probe connection	DIN Port
IP Class	10



Included Accessories

Item Code	Accessories
1500.150.01	Magnetic Stirring bar 20mmx8mm (For 100-1000ml)
1500.150.02	Magnetic Stirring bar 25mmx9mm (For 2000-5000ml)
850.800.01	SS Rod (542mm, Ø 9mm)
850.800.03	Moulded PT 100 Sensor probe
850.800.04	Bosshead



HEAT
220-670W



STIR
800 RPM



**HEAT/STIR/TIME
SELECTION**



**MANTLE/PROBE
SELECTION**



TIMER
00:01-99:59



TEMPERATURE
Upto 400 °C



**HEAT/STIR/TIME
DISPLAY**



**CELSIUS TO
FAHRENHEIT**



HEATING MANTLE COMBINED UNIT

- PU Coated Mild Steel construction
- Heating Mantle Combined unit made of M. steel
- ON-OFF knob for heat power control
- Mantle knitted with glass fibre yarn
- Provides uniform heating to flasks
- For Round Bottomed Flasks as per DIN - 12347
- Easy maintenance
- Long Life
- Also Available with metallic stand 1100.EU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	No. of Position of regulator	Price / Piece
2600.DNEU.01	100	600	3/3	22365
2600.DNEU.02	250	600	3/3	22785
2600.DNEU.03	500	750	3/3	25095
2600.DNEU.04	100	1200	6/6	28875
2600.DNEU.05	250	1200	6/6	31605
2600.DNEU.06	500	1500	6/6	33075



Buy Now!



2600.DNEU

Included Accessories

Item Code	Accessories
2000.200.01	Vertical Rod Stainless Steel length 542 mm, Ø 9.8 mm
2000.200.02	Horizontal Rod Stainless Steel length 972 mm, Ø 9.8 mm
2000.200.03	8/5 Boss Head
2000.200.04	6/3 Clamp



Buy Now!

Technical Specification :

Heating Mantle Body	Made of MS
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 500ml
Temperature Range	Approx. 400°C
Heating Control	Energy regulator
Dimension	495 x 246 x 200
Permissible Ambient Temperature	5- 40 °C
Weight	10.2 Kgs
Permissible relative moisture	80%
IP Class	10



HEAT
600-1500W



**HEAT
SELECTION**



CAPACITY
Upto 500ml



TEMPERATURE
Upto 400 °C




MANTLE BODY
MILD STEEL

SINGLE SOXHLET EXTRACTION UNIT

Extraction unit metal stand with heating mantle

Model No. (230V, 50Hz)	Capacity (ml)	Watts	Dimension	No. of Position of regulator	Price / Piece
1101.DNEU.01	100	200	280x210x520	1/1	16390
1101.DNEU.02	250	200	280x210x520	1/1	16610
1101.DNEU.03	500	250	280x210x520	1/1	16830

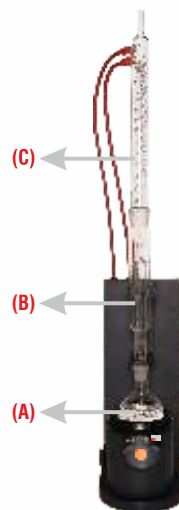

***For soxhlet extraction apparatus,
Please see Page no. 118**



HEATING MANTLE COMBINED UNIT WITH STIRRER

- PU Coated Mild Steel construction
- Heating Mantle Combined unit made of M. steel
- ON-OFF knob for heat power control
- Stir speed control also available
- Mantle knitted with glass fibre yarn
- Provides uniform heating to flasks
- For Round Bottomed Flasks as per DIN - 12347
- Easy maintenance
- Long Life
- Also available with Metallic Stand 1600.EU



2300.DNEU

Model No. (230V, 50Hz)	Capacity (ml)	Watts	No. of Position of regulator	Price / Piece
2300.DNEU.01	100	660	3/3	Price on Request
2300.DNEU.02	250	660	3/3	Price on Request
2300.DNEU.03	500	810	3/3	Price on Request



Buy Now!

Included Accessories

Item Code	Accessories
2000.200.01	Vertical Rod Stainless Steel length 542 mm, Ø 9.8 mm
2000.200.02	Horizontal Rod Stainless Steel length 972 mm, Ø 9.8 mm
2000.200.03	Boss Head
2000.200.04	Clamp
2000.200.05	Magnetic Bar (20mm, Ø 8mm)

Technical Specification :

Heating Mantle Body	Made of Mild Steel
Heating Mantle Material	Glass Fibre Yarn
Mantle Capacity	To hold standard Round Bottom Flasks upto 500ml
Valuable Stirring speed	750 RPM
Temperature Range	Approx. 400°C
Heating Control	Electronic power regulator
Stir Control	Electric regulator
Dimension	495 x 246 x 200
Permissible Ambient Temperature	5- 40 °C
Weight	7.3 Kgs
Permissible relative moisture	80%
IP Class	10



HEAT
660-810W



TEMPERATURE
Upto 400 °C



**HEAT/STIR
SELECTION**




STIR
750 RPM



**MANTLE BODY
MILD STEEL**



CAPACITY
Upto 500ml



***For soxhlet extraction apparatus,
Please see Page no. 118**

SINGLE SOXHLET EXTRACTION WITH STIRRER

Extraction unit metal stand with heating mantle stirrer

Model No. (230V, 50Hz)	Capacity (ml)	Watts	No. of Position of regulator	Price /Piece
1601.DNEU.01*	100	220	1/1	22220
1601.DNEU.02*	250	220	1/1	22550
1601.DNEU.03*	500	270	1/1	24090



OVERHEAD STIRRER PRO WITH LCD DISPLAY

- Independent LCD display for RPM & Timer 99:59 (HH:MM)
- User Friendly
- Brushless DC motor
- Liquid cannot reach internal components due to front safeguard
- Audible alarm for error conditions
- Effective stirring provides clock wise & anti clock wise stirring modes
- Prominent used in chemical synthesis, pharmaceuticals, physical & chemical analysis, petrochemical, cosmetics, health products, foods, biotechnology & so on
- Auto power 'ON' possible

Model No.	V	Hz	Price/Piece*
6050P.DNEU.01	100-240	50/60	Price on Request
6100P.DNEU.01	100-240	50/60	Price on Request

Technical Specification :

Model No.	6050P.DNEU	6100P.DNEU
Speed Range	50-1500RPM	50-3000RPM
Max. Torque	80N.cm	65N.cm
Max. Viscosity	10000 mPass	6000 mPass
Max. Stirring	60L	40L
Timing Range	1min - 99:59min	1min - 99:59min
T-On Time	5 - 999 Sec	5 - 999 Sec
T-Off Time	0, 5 - 999 Sec	0, 5 - 999 Sec
Stirring Shaft Extension Feature	Yes	Yes
Stirring Modes	Yes	Yes
Motor Type	BLDC	BLDC
Operating Voltage	24VDC	24VDC
Supply Voltage	100 - 240Vac, 50/60Hz	100 - 240Vac, 50/60Hz
Power	130	130
Dimension	90x240x220mm	90x240x220mm
Net Weight	11.4kg	11.4kg
IP Class	54	54



6050P/6100P.DNEU



Optional Accessories

DNOH-J
Price-3350/-
Boss Head & Clamps

DNOH-K
Price-9500/-
SS Stands



DNOH-A Price-2852/-
DNOH-B Price-3623/-
DNOH-C Price-4899/-
DNOH-D Price-3738/-




DNOHS-4
Price-9500/-

Heavy Base Stand

DNOHS-1
Price-11270/-



DNOHS-2
Price-22500/-



DNOHS-3
Price-21515/-



DNOH-F
Price-3082/-



DNOH-G
Price-5923/-



DNOH-H
Price-6038/-



DNOH-I
Price-2162/-

*Impellers, stands, PT 100 Sensor and boss head clamps to be ordered separately

OVERHEAD STIRRER ANALOG

- Easy Stir Controls
- User Friendly
- Brushless DC motor
- Liquid cannot reach internal components due to front safeguard
- Prominent used in chemical synthesis, pharmaceuticals, physical & chemical analysis, petrochemical, cosmetics, health products, foods, biotechnology & so on

Model No.	V	Hz	Price/Piece*
6025.DNEU.01	100-240	50/60	Price on Request

Technical Specification :

Model No.	6025.DNEU.01
Speed Range	0-3000RPM
Max. Torque	65N.cm
Max. Viscosity	6000 mPass
Max. Stirring	40L
Stirring Shaft Extension Feature	Yes
Motor Type	BLDC
Operating Voltage	24VDC
Supply Voltage	100 - 240Vac, 50/60Hz
Power	130
Dimension	90x240x220mm
Net Weight	11.2 kg
IP Class	54



6025.DNEU.01


***Accessories to be added separately**

Optional Accessories



DNOH-J
Price-3350/-
Boss Head & Clamps

DNOH-K
Price-9500/-
SS Stands



***Impellers, stands and boss head, clamps to be ordered separately**

DIGITAL OVERHEAD STIRRER

- Independent LED display for RPM & Timer 99:59 (HH:MM)
- User Friendly
- Brushless DC motor
- Liquid cannot reach internal components due to front safeguard
- Audible alarm for error conditions
- Effective stirring provides clock wise & anti clock wise stirring modes
- Prominent used in chemical synthesis, pharmaceuticals, physical & chemical analysis, petrochemical, cosmetics, health products, foods, biotechnology & so on
- Auto power 'ON' possible



Buy Now!

Model No.	V	Hz	Price/Piece*
6050.DNEU.01	100-240	50/60	Price on Request
6100.DNEU.01	100-240	50/60	Price on Request

Technical Specification :

Model No.	6050.DNEU.01	6100.DNEU.01
Speed Range	50-1500RPM	50-3000RPM
Max. Torque	80N.cm	65N.cm
Max. Viscosity	10000 mPass	6000 mPass
Max. Stirring	60L	40L
Timing Range	1min - 99:59min	1min - 99:59min
T-On Time	5 - 999 Sec	5 - 999 Sec
T-Off Time	0, 5 - 999 Sec	0, 5 - 999 Sec
Wifi Control	No	No
Temperature Measurement	No	No
Stirring Shaft Extension Feature	Yes	Yes
Stirring Modes	Yes	Yes
Motor Type	BLDC	BLDC
Operating Voltage	24VDC	24VDC
Supply Voltage	100 - 240Vac, 50/60Hz	100 - 240Vac, 50/60Hz
Power	130	130
Dimension	90x240x220mm	90x240x220mm
Net Weight	11.2 kg	11.2 kg
IP Class	54	54




6050/6100.DNEU

*Accessories to be added separately

Optional Accessories

DNOH-J
Price-3350/-
Boss Head & Clamps

DNOH-K
Price-9500/-
SS Stands



*Impellers, stands and boss head, clamps to be ordered separately

DIGITAL OVERHEAD STIRRER WITH WIFI LABS-CONNECT & TEMP.

- Independent LED display for RPM & Timer 99:59 (HH:MM)
- User Friendly
- Brushless DC motor
- Liquid cannot reach internal components due to front safeguard
- Audible alarm for error conditions
- Effective stirring provides clock wise & anti clock wise stirring modes
- Prominent used in chemical synthesis, pharmaceuticals, physical & chemical analysis, petrochemical, cosmetics, health products, foods, biotechnology & so on
- Can be operated with **Labs-connect App** over Wifi/USB Controls
- Auto power 'ON' possible



Buy Now!

Model No.	V	Hz	Price/Piece*
6050T.DNEU.01	100-240	50/60	Price on Request
6100T.DNEU.01	100-240	50/60	Price on Request

Technical Specification :

Model No.	6050T.DNEU	6100T.DNEU
Speed Range	50-1500RPM	50-3000RPM
Max. Torque	80N.cm	65N.cm
Max. Viscosity	10000 mPass	6000 mPass
Max. Stirring	60L	40L
Timing Range	1min - 99:59min	1min - 99:59min
T-On Time	5 - 999 Sec	5 - 999 Sec
T-Off Time	0, 5 - 999 Sec	0, 5 - 999 Sec
Wifi Control	Yes	Yes
Temperature Measurement	Yes	Yes
Stirring Shaft Extension Feature	Yes	Yes
Stirring Modes	Yes	Yes
Motor Type	BLDC	BLDC
Operating Voltage	24VDC	24VDC
Supply Voltage	100 - 240Vac, 50/60Hz	100 - 240Vac, 50/60Hz
Power	130	130
Dimension	90x240x220mm	90x240x220mm
Net Weight	11.4kg	11.4kg
IP Class	54	54

6050T/6100T.DNEU



Optional Accessories

DNOH-J
Price-3350/-
Boss Head & Clamps

DNOH-K
Price-9500/-
SS Stands



DNOH-A
Price-2852/-

DNOH-B
Price-3623/-

DNOH-C
Price-4899/-

DNOH-D
Price-3738/-

DNOH-E
Price-3393/-



*Impellers, stands, PT 100 Sensor and boss head clamps to be ordered separately

ORBITAL SHAKER

Product Features

- Compact design
- Available with Flat platform (Cat. No. 3500.303.01)
- Built in DC brushless motor
- Microprocessor controlled
- User-Friendly
- Application in molecular biology, immunology, chemistry lab
- Low consumption
- Maximum stirring speed upto 300RPM
- Digital set up of RPM and time with independent LED display
- Audible alarm at time cycle end for safety and ease of unsupervised operation
- Silent and stable operation
- Compatible for use with various capacity conical flasks and different sample containers.



3500.DNEU.01



Buy Now!


Model No.	V	Hz	Price/Piece
3500.DNEU.01	100-240 V	50/60	Price on Request

Technical Specification :

Shaker Body Material	Plastic
Speed Range	50-300 RPM
Orbit	20 MM
Dimensions of Body	284 x 264 x 108 mm
Max. Loading Capacity	2.0kgs
Permissible ambient Temp.	5 - 45°C
Weight	7.24 Kgs
Voltage	AC 100 - 240V (50/60 Hz)
Timing Range	1min - 99Hrs 59Min
IP Class	20

General Optional Accessories

**Platform, Flat,
Non-Slip Mat**



3500.303.01

Platform, Double



3500.303.02

**Platform, Universal,
with 3 secured bars**



3500.303.03

**Platform with clamps,
6 Places (250ml)**



3500.303.04

**Platform with clamps,
12 Places (100ml)**



3500.303.05

**Platform universal
for tubes**



3500.303.06

Included :
Platform, Flat, Non-Slip Mat



3500.303.01



STIR
300 RPM



TIMER
00:01-99:59



LOAD CAPACITY
2.0 Kgs



**STIR/TIME
DISPLAY**



INCUBATOR SHAKER WITH COOLING

Product Features

- SS 304 Internal
- PU coated outer body made of mild steel
- Compact design
- Available with Flat platform
- BLDC motor driven
- Microprocessor controlled
- User-Friendly
- Application in molecular biology, immunology, chemistry lab
- Low power consumption
- Maximum stirring speed upto 300RPM
- Digital set up of RPM and time with independent LED display
- Audible alarm at time cycle end for safety and ease of unsupervised operation
- Silent and stable operation
- Compatible for use with various capacity conical flasks and different sample containers
- Powerful efficient 800W Heater



3900.DNEU.01

Model No.	V	Hz	Price/Piece
3900.DNEU.01	230 V	50	Price on Request



Buy Now!

Technical Specification :

Shaker Body Material	: Metal
Speed Range	: 50~300 rpm
Fan Speed	: 2000~3200 rpm
Orbit (Horizontal)	: 20 mm
Dimensions of Body	: 609x770x515 (WxDxH)
Platform Size	: 480x315x80 (WxDxH)
Permissible ambient Temp.	: 20 - 30°C (Approx.)
Temp. Control Range	: 4-60°C
Power	: AC 230V, 800 W
Timer	: 1min - 99Hrs 59Min
Temp. Control Accuracy	: $\pm 0.3^{\circ}\text{C}$
IP Class	: 30
Can Handle	: upto 20Kg



STIR
300 RPM



TIMER
00:01-99:59



TEMPERATURE
Upto 60°C



CELSIUS TO FAHRENHEIT



HEAT/STIR/TIME BUTTON



HEAT/STIR/TIME DISPLAY



INCUBATOR SHAKER

WITH COOLING, WIFI BASED LABS-CONNECT

Product Features

- SS 304 Internal
- PU coated outer body made of mild steel
- Compact design
- Available with Flat platform
- BLDC motor driven
- Microprocessor controlled
- User-Friendly
- Application in molecular biology, immunology, chemistry lab
- Low power consumption
- Maximum stirring speed upto 300RPM
- Digital set up of RPM and time with independent LED display
- Audible alarm at time cycle end for safety and ease of unsupervised operation
- Silent and stable operation
- Compatible for use with various capacity conical flasks and different sample containers
- Powerful efficient 800W Heater
- Can be operated with **Labs-connect App** over Wifi/USB Controls



3900.DNWEU.01

Model No.	V	Hz	Price/Piece
3900.DNWEU.01	230 V	50	Price on Request

Technical Specification :

Shaker Body Material	: Metal
Speed Range	: 50~300 rpm
Fan Speed	: 2000~3200 rpm
Orbit (Horizontal)	: 20 mm
Dimensions of Body	: 609x770x515 (WxDxH)
Platform Size	: 480x315x80 (WxDxH)
Permissible ambient Temp.	: 20 - 30°C (Approx.)
Temp. Control Range	: 4-60°C
Power	: AC 230V, 800 W
Timer	: 1min - 99Hrs 59Min
Temp. Control Accuracy	: $\pm 0.3^{\circ}\text{C}$
IP Class	: 30
Can Handle	: upto 20Kg



STIR
300 RPM



TIMER
00:01-99:59



TEMPERATURE
Upto 60°C



CELSIUS TO FAHRENHEIT



HEAT/STIR/TIME
BUTTON



HEAT/STIR/TIME
DISPLAY



VORTEX SHAKER PRO

NEW

Vortex Shaker suitable for short-time operation (touch function), activated by pressing shaker attachment or continuous operation.

Product Features

- Wide speed range, infinitely adjustable
- Different applications thanks to 3 interchangeable attachment and 7 inserts (e.g. tubes, microtiter plate, conical flasks 250 ml etc.), please order separately
- Attachments securely click onto appliance in any position
- Special strap (ensure easy handling of round/conical flasks)
- Sturdy metal die cast casing
- Compact design
- Short-time operation activated by pressing attachment
- Stable at high speeds thanks to special feet (sillicon base with ultra high vibration damping)
- Eccentric with ball bearings
- Suitable for continuous operation with low self heating thanks to self ventilation of motor



3750.DNEU.01

Model No.	V	Hz	Price/Piece
3750.DNEU.01	230	50	Price on Request

Technical Specification :

Type of movement	orbital
Shaking stroke/Orbit	4 mm
Permissible shaking weight(incl. attachment)	0.4 kg
Motor rating input	58 W
Motor rating output	10 W
Permissible ON time	100%
Speed min (adjustable)	500 rpm
Speed range	0 - 2500 rpm
Speed display	none
Operating mode	continous operation
Touch function	yes
Working with microtiter plates	yes
Number of microtiter plates	1
Dimensions (W x H x D)	146 x 144 x 157 mm
Weight	4 kg Approx
Permissible ambient temperature	5 - 40 °C
Permissible relative Humidity	80%
Protection class according to DIN EN 60529	IP 21
Power input	60 W

Optional Accessories



MINI SHAKER PRO/VORTEXER

Compact, universal small shaker suitable for shaking tasks with all small vessels with adapters and microtiter plates

- PU Coated aluminum Alloy Construction
- 2 in 1 vortex with shot mode & shaking mode gives result quickly
- Support thirteen different adaptors
- Wide range of attachments available
- Timer with countdown function
- Stable in all speed ranges
- Sturdy Aluminum die cast casing
- Continuous or touch/shot operation (with standard attachment)
- Audible timer by pass mode for uninterrupted non stop use

Model No.	V	Hz	Price/Piece
3800.DNEU.01	100-240 V	50/60	Price on Request



Buy Now!

Technical Specification :

Type of movement	Orbital
Shaker Diameter	3 mm
Permissible orbit weight (incl. attachment)	0.5 kg
Permissible ON time	100%
Speed min (adjustable)	200 rpm
Speed range	200 - 3000 rpm
Speed display	LED
Speed deviation	1%
Timer	yes
Timer display	LED
Time setting min.	1 s
Time setting max.	100 Hrs
Operating mode	Timer and Continuous Operation
Touch/ shot function	yes
Working with microtiter plates	yes
Number of microtiter plates	1
Dimension	150x207x111mm (WxDxH)
Permissible ambient temperature	5 - 40 °C
Permissible relative humidity	80%
Protection class according to DIN EN 60529	IP 21
Adaptors	Available
Voltage	100 - 240 V
Frequency	50/60 Hz
Power input	10 W
DC Voltage	24 V
Weight	3.8 Kgs
IP Class	21

*Two operating modes:

The maximum speed of 3,000 rpm is for the standard attachment in touch mode. When using other attachments the speed should be limited to 1,300 rpm.



3800.DNEU.01



Optional Foam Adapters

DNS-A	DNS-B	DNS-C
955/-	955/-	1305/-
DNS-D	DNS-E	
955/-	955/-	

Optional Accessories

DNS-F	DNS-G	DNS-H
465/-	1910/-	6975/-
DNS-I	DNS-J	DNS-K
6975/-	7905/-	7175/-
DNS-L	DNS-N	
7175/-	Price on Request	



VORTEXER

Product Features

- Outer shell and touch concave are made of plastic & silicone which has resistance to chemical attacks.
- The thick base makes it very steady and reliable.
- The maximum diameter of the mixed tube is up to 30mm. Suitable for mixing tubes / centrifugal tubes with prominent mixing effect.
- 12V low voltage power adapter driven, very smart and portable. Various speed adjustment with indicator.



Model No.	V	Hz	Price/Piece
3700.DNEU.01	100-240 V	50/60	10400



Buy Now!

3700.DNEU.01

Technical Specification :

Body Material	Main Frame : ABS, Caps : Silicone Rubber, Base : Steel Alloy
Speed Range	0~4000 RPM
Max. Capacity	50ml tube (Ø30 mm)
Dimension (WxDxH)	114 x 114 x 93mm
Shaking Orbit	4.5mm
Voltage	DC 12V 1A
Power	12W
Net Weight	900 gms
IP Class	62



POWER
12 W



STIR
4000 RPM



CAPACITY
50ml Tube



MINI CENTRIFUGE

Product Features

- Patented high tech motor causes low working noise
- Produce low vibration with advanced shock absorbers
- Compact design and can carry higher volume of 2 ml x 8 places
- Easy replacement of rotor
- Maximum relative centrifugal force upto 3260G
- Fast Stopping in 15 seconds with cover breaking time of 3 seconds.
- Spatial rotation for 360° are shape, low windage resistance with slow temperature increase
- Filtration & voltage regulation function makes smooth running of unit & causes low rotation difference.



5000.DNEU.01



Buy Now!

Model No.	V	Hz	Price/Piece
5000.DNEU.01	230 V	50	17000

Technical Specification :

Body Material	Main Frame : ABS, Cover : PC, Adapter : PP, Absorber : NBR, Roller : ABS
Speed Range	4000 & 7200 RPM ($\pm 20\%$)
RCF	810~3260xg
Rotor types	Rotor, 2ml x 8 and 0.2ml x 8, 0.2ml x 8 tubes strip x 2 rows
Max. Capacity	2ml x 8
Dimension (WxDxH)	174x157x130mm
Speed Control type	Constant speed
Driving Speed	Direct drive
Brake System	Dynamic
Acceleration Time	90% speed in 5 seconds
Deceleration Time	Cover closed within 15 seconds, cover opens within 6 seconds
IP Class	54

Included Accessories

Rotor Selection :	5000.303.01	2ml x 8, 0.5ml, 0.2ml adapter each 8 pcs
	5000.303.02	2ml x 8, 8 x 0.2ml tubes strip x 2 rows



ROLLER MIXER

Product Features

- Efficient Rolling and swinging motion for mixing blood samples, Liquid solid suspension & various substance
- Digital set-up for RPM & time with independent LED display
- Maximum rolling speed upto 80RPM
- Seven rollers with small foot print & easy cleaning
- Brushless DC motor
- Compatible for use with wide range of tubes
- Used for prevention of blood coagulation and immune precipitation etc



4000.DNEU.01

Model No.	V	Hz	Price/Piece
4000.DNEU.01	100-240 V	50/60	Price on Request



Buy Now!

Technical Specification :

Mixer Body Material	: Plastic
Operation Mode	: Rolling & Swinging
Amplitude	: 24mm
Roller Quantity	: 7
Speed Range	: 10-80RPM
Speed Unit	: 1RPM
Roller Length	: 280mm
Motor	: brushless DC motor
Dimension (DxWxH)	: 500 x 280 x 120mm
Max. Capacity	: 4kgs
Weight of Body	: 3.1 kg
Voltage	: AC100-240 50-60Hz
Power	: 20W



POWER
20 W



STIR
10-80 RPM



TIMER
00:01-99:59



STIR/TIME
DISPLAY



STIR/TIME
BUTTON



LOAD CAPACITY
4.0 Kgs



FAT DETERMINATION ASSEMBLY DIGITAL CONTROLLER (SOXHLET/TWISSELMAN APPARATUS)

Product Features

- Cost-effective and user-friendly apparatus for hot extraction.
- Energy individually adjustable for every sample position.
- Cooling water distribution, distribution strip ensures uniform cooling at sample positions.
- Practical condenser ledge to safely deposit the condenser between hot extractions
- Brackets for safely holding the intermediate extraction pieces after removing the sample container
- Material of construction of adaptors is SS 304 Grade

Model No.	V	Hz	Price/Piece
1950.DNEU.01	230 V	50	Price on request

Technical Specification :

Voltage	230 VAC
Frequency	50 Hz
Power consumption	~1500 W
Power consumption	7 A
Weight (without glass)	approx. 15 kg
Flask Capacity	250ml
Extraction Capacity	500ml
Condenser	100ml
Plate/Adaptor Temp.	upto 400°C
Dimensions in cm (W x D x H) (without glass)	504x274x765 mm
IP Class	20



1950.DNEU.01



POWER
1500 W



WEIGHT
15 Kgs

***For Glass accessories has to be order separately**



FAT DETERMINATION (SOXHLET/TWISSELMAN APPARATUS)

Product Features

- Cost-effective and user-friendly apparatus for hot extraction.
- Energy individually adjustable for every sample position.
- Cooling water distribution, distribution strip ensures uniform cooling at sample positions.
- Practical condenser ledge to safely deposit the condenser between hot extractions
- Brackets for safely holding the intermediate extraction pieces after removing the sample container
- Material of construction of adaptors is SS 304 Grade

Model No.	V	Hz	Price/Piece
1900.DNEU.01	230 V	50	Price on request



Buy Now!



1900.DNEU.01

Technical Specification :

Voltage	230 VAC
Frequency	50 Hz
Power consumption	~1500 W
Power consumption	7 A
Weight (without glass)	approx. 15 kg
Flask Capacity	250ml
Extraction Capacity	500ml
Condenser	100ml
Plate/Adaptor Temp.	upto 400°C
Dimensions in cm (W x D x H) (without glass)	504x274x765 mm
IP Class	20



POWER
1500 W



WEIGHT
15 Kgs

***For Glass accessories has to be order separately**



THERMOSTATIC WATER BATH

Uses:

This apparatus is designed for use in distilling, drying, concentrating and heat soaking chemicals or biological products.

Temperature control by means of PID controller.

Inner chamber with SS 304

MODELS:

The water baths are available in two models - 6 & 12



1800.DNEU.01

POSITIONS :

6 & 12 Position

Model No.	Volt	Hz	Positions	Price/Piece
1800.DNEU.01	230/115	50/60	6	Price on Request
1800.DNEU.02	230/115	50/60	12	Price on Request



Buy Now!

Technical Specification :

6 Position

Power	1500 W
No. of Opening	6
Volume Capacity	12 Ltrs
Temperature-control range	RT-99.9°C
Temperature-fluctuation	±0.5°C
Dimension	120 (D) x 110 (H)
Working Room (cm)	50x30x15
Weight	8.9 Kgs
IP Class	34

12 Position

Power	3000 W
No. of Opening	12
Volume Capacity	24 Ltrs
Temperature-control range	RT 99.9°C
Temperature-fluctuation	±2°C
Dimension	120 (D) x 90 (H)
Working Room (cm)	92x32x12
Weight	21 Kgs
IP Class	34



POWER
1500 W



TEMPERATURE
Upto 99.9 °C



POWER
3000 W



TEMPERATURE
Upto 99.9 °C




Water Bath Cum Water Bath Shaker (touch Screen Version)

NEW

Safety Features

- Water bath and shaker in a single system.
- Selection of mode in the touch screen
- Absolutely noiseless operation.
- Programmable system
- Removable tray
- Flexible Polypropylene Rubber Clamps reinforced with inner metallic cup for sturdy & rugged use for intact grip to perfectly hold the flask

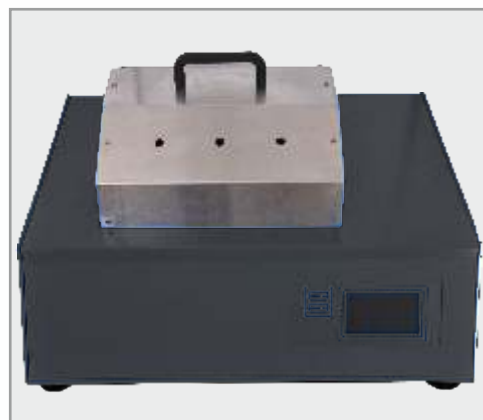

Model No.	Price/Pack
1800.DNEU.03	Price on Request

Technical Specification :

Operation	Water bath or water bath shaker
Material of construction	MS with powder coated finish
Type of motion	Reciprocal motion
SPM range	50 to 150 Strokes per minute
Movement	Linear link guided drive mechanism
Movement sensor	IR scan sensor
Motor	Stepper servo motor (Brushless)
Drive	Servo drive
Process controller	4.3" TFT touch screen controller
Display	Feather touch membrane key pad with touch controller(Power, Heater)
Temperature controller	PID controller
Temperature range	5 Degree above ambient to 100 Degree
Temperature accuracy	+/- 0.5Degree
Temperature sensor	Pt 100
No of program	1 program, 5 steps for both shaker and water bath
Programmable	For Strokes Per Minute, Temperature and Time
Heater	Immersion Heater
Heater power	1500 W
Water tank	Stainless steel
Tank capacity	15 lit
Tray	Stainless steel Removable
Tray capacity	250ml clamp-9 nos
Hood or cover	Stainless steel
Internal Recirculation pump for Temperature stability	Magnetic pump
External recirculation pump	(optional) magnetic pump
Electrical requirement	230V/50Hz/ 6A
Unit dimension	25 x 25 x15inches

THERMOSTATIC OIL BATH

Product Features

High quality stainless steel material, heat resisting and anticorrosion, Digital controller digital display, durable.

- This heated bath is used in the laboratory to allow a chemical reaction to occur at an elevated temperature.
- This heated bath is a fluid placed in an open (metal) pot. Water and silicone oil are the most commonly used fluids. A water bath is used for temperatures up to 100 °C. An oil bath is employed for temperatures over 100 °C.
- This heated bath is heated on a hot plate, or with a bunsen burner. The reaction chamber (Florence flask, Erlenmeyer flask, beaker) is immersed in the heated bath. A thermometer is usually kept in the fluid to monitor the temperature.



1850.DNEU.01

Model No.	V	Hz	Price/Piece
1850.DNEU.01	230	50	Price on Request



Buy Now!

Technical Specification :

Heating Power	1000W
Temperature control range	RT~300°C
Volume Capacity	7 Ltrs
Temperature fluctuation	± 0.5 Celsius
Working size(mm ³)	Ø26× 16
Display	Digital
Weight	7.4 Kgs
IP Class	34



POWER
1000 W



TEMPERATURE
Upto 300°C



SET
ALARM



TEMP./TIME
BUTTON



TEMP./TIME
DISPLAY



Instruments

DIGITAL INSTANT N-P-K TESTER

for Soil Testing

The electro-chemical method uses innovative technology of ionization reduction

Operating Instruction

1. Take off the protective cap from metal probe
2. Press OFF/ON button Tester display "0".
3. **Quick testing** : Water the soil with distilled water before testing. Make sure the water can go 10 cm deep the least. Best humidity is 60%-80%. Insert the metal probe into soil vertically and clockwise, to about 6-8 cm deep. Make sure the soil have thorough contact with metal probe. After about 6 seconds, the tester will display the measured value. Tightness of soil will affect measuring result. Multiple tests at the same and different points should be performed and take the average as final result.

Accurate testing : use a container, mix dried water at the rate of 3:1. Stir and make in into a mud form. Put the metal probe into the mud about 6-8 cm deep. About 6 seconds, the tester will display the measured value.

4. Wipe the metal probe with towel or tissue paper after each test. Make it clean and dry. till the display show "0".



GLINPK

Model No.	Pack of	Price/Pack
GLINPK	3	Price on Request



Buy Now!

Technical Specification :

Range	: 0-1999 mg/Kg(mg/l)
Resolution	: 1mg/kg(mg/l)
Accuracy	: ± 0.2 F.S.
Operating Temp	: 5-45 °C (41-113°F) /ATC
Calibration	: Factory calibrated
Power supply	: DC 9V (9V580/6F22Ni-MH rechargeable battery)
Display	: LCD with back light
Dimension	: $\varnothing 50.5 \times 250$ mm
Probe length	: 140mm
Features	: Auto switch off in about 5 minutes
Weight	: 390 Gms (Approx)
IP Class	: 64

DIGITAL SOIL EC TESTER

for Soil Testing

The tester features a unique metal surface electrode that provides fast and easy on the spot EC(mS/cm) measurements for soil and hydroponics nutrient etc.

Operating Instruction

1. Take off the protective cap from metal probe
2. Press OFF/ON button Tester display "0".
3. **Quick testing :** Water the soil with distilled water before testing. Make sure the water can go 10 cm deep the least. Best humidity is 60%-80%. Insert the metal probe into soil vertically and clockwise, to about 6-8 cm deep. Make sure the soil have thorough contact with metal probe. After about 6 seconds, the tester will display the measured value. Tightness of soil will affect measuring result. Multiple tests at the same and different points should be performed and take the average as final result.

Accurate testing : Use a container, mixdried soil with distilled water at the rate of 10:1. Stir and make it into a mud form. Put the metal probe into the mud about 6-8CM deep. About 6 seconds, the tester will display the measured value.

4. Wipe the metal probe with towel or tissue paper after each test. Make it clean and dry. till the display show "0".



GLIEC

Model No.	Pack of	Price/Pack
GLIEC	1	Price on Request



Buy Now!

Technical Specification :

Range	: 0-1999 EC(mS/cm);
Resolution	: 0.10 EC(mS/cm)
Accuracy	: ± 0.1 EC (00-100 EC)
Operating Temp	: 5-45°C (41 - 113°F VATC)
Calibration	: 1 point (6.7 EC / Factory calibrated - No more calibration)
Power supply	: DC 9V (L1022 battery)
Display	: LCD with illumination
Dimension	: $\approx 50.5 \times 250$ mm
Probe length	: 140mm
Features	: Automatic switch-off function : After about 5 minutes without pushing buttons, the meter will be switched off automatically (or manual shutdown)
Weight	: 110 Gms (Approx)
IP Class	: 64

DIGITAL pH TESTER

for Soil testing

The tester features with innovative nanotechnology metal material sensor, for fast and easy test of pH value of soil, fruit, meat, cheese and other semi-solid media.

Operating Instruction

1. Take off the protective cap from metal probe
2. Press OFF/ON button. Tester displays "7.00".
3. Insert the metal probe vertically into the sample that requires testing, at least 6-8cm deep. Make sure there is close contact (Soil need to humid~60%-80%). The tester will start testing automatically. After about 1 minute the test is over. Indication light will be on for about 10 seconds. The displayed number is locked, which is the value of pH.
4. After each test, take out the tester, wipe the metal probe clean with towel or tissue paper. Display will be unlocked, and show "7.00". It is ready for a new test.
5. After use, wipe the metal probe clean until it displays "7.00". Switch off the tester.



GLIPH

Model No.	Pack of	Price/Pack
GLIPH	1	Price on Request



Buy Now!

Range	: pH: 3.0-14.0 pH
Resolution	: 0.10 pH
Accuracy	: ± 0.2 pH (3.0-12.0 pH)
Operating Temp	: 5-45 °C
Calibration	: 1 point (Factory calibrated -No more calibration)
Power supply	: DC 9V (L1022 battery)
Display	: LCD
Dimension	: $\varnothing 50.5 \times 250$ mm
Probe length	: 140mm
Features	: Automatic detection of data and lock to keep, automatic switch to OFF in 5 minutes (or manual shutdown).
Weight	: 110 Gms (Approx)
IP Class	: 64

Nitrogen Analyser

Three in One Combo Automatic 6 Place Digestion With Distillation & Scrubber With Common Touch Screen Control & Display

NEW

- The control panel unit along with inbuilt temperature controller, timer, mother board and SMPS is be isolated in separate control tower and housing to protect electronics from wet chemistry & acid/ alkali process area for longevity and safety of all electronic components.
- Water in the scrubber tank is drained and filled automatically every time at the end of digestion thereby draining the water for every consecutive cycle.
- Manual drain of water from the scrubber tank is also provided.
- A separate distilled water line to the steam generator.
- Auto refilling of distilled water to the steam generator is provided by using a proximity sensor.
- Monitoring of boiler water level from outside.
- Users choice to choose independent or combined operation of digestion and distillation.
- Inbuilt safety from Over voltage



Model No.	Price/Pack
DN.NA.01	Price on Request

Ultrasonic Cleaner Pro Series



Technical Specification :

MODEL	SM 140US	SM 200US (L)	SM 250US	SM 300US	SM500US
Tank Size (Inches) (L*W*H)	21 x 7 x 6	24 x 9 x 6	16 x 16 x 6	15 x 15 x 8	22 x 14 x 10
Outer Size (Inches) (L*W*H)	23 x 10 x 15.4	26 x 12 x 15.4	18 x 19 x 15.8	19.2x19.8 x19	28 x 17.5 x 19
Tank	SS 304	SS 304	SS 304	SS 304	SS 304
Enclosure	SS 304	SS 304	SS 304	SS 304	SS 304
Tank Capacity	14 Ltr	20 Ltr	25 Ltr	30 Ltr	50 Ltr
Ultrasonic Power	300 Watts.	400 Watts.	450 Watts.	500 Watts.	750 Watts.
Heater Power	500 Watts.	500 Watts.	500 Watts.	500 Watts.	500 Watts.
PSP	Yes	Yes	Yes	Yes	Yes
Ultrasonic Freq. Khz.	25/33/40±3	25/33/40±3	25/33/40±3	25/33/40±3	25/33/40±3
Timer Digital	0 to 99 Min.	0 to 99 Min.	0 to 99 Min.	0 to 99 Min.	0 to 99 Min.
Power Input	230 VAC.	230 VAC.	230 VAC.	230 VAC.	230 VAC.
Degas Mode	On / Off	On / Off	On / Off	On / Off	On / Off
Temperature	Amb. - 60°C	Amb. - 60°C	Amb. - 60°C	Amb. - 60°C	Amb. - 60°C
Transducer	Imported make PZT type bonded at the bottom of the tank with weld bond technique.				
Ultrasonic Gen.	Advance latest MOSFET / IGBT based smps.				
Accessories	Lid, Basket, Drain Valve, Powercord, User Friendly Operation Manual.				

Automatic Solvent Extraction System

NEW

Safety Features

- Standalone housing for Temperature controller to protect electronics from solvent area & heat zone.
- PC chart software performs Live graphical representation of time / temperature gradient on PC Connectivity
- Auto Alarm for recovery phase
- Auto power off mode on completion of extraction.
- Independent loading of sample with individual mechanical controls.
- Inbuilt safety features like auto error indication, auto over temperature protection and auto sensor break protection.
- Cold water line for condensation of solvent with silicon hose inter connection for condensor



Model No.	Price/Pack
DAN.6T.02	Price on Request

Technical Specification :

MODEL	DAN -6T-02
Description	Automatic PC Compatible Autosequencing Regular Six Place Solvent Extraction System
No. of Positions	Six Samples
Sample Size	0.1 to 8 gms (depending on the type of sample)
Temperature Control Range	35°C (Ambient) to 300°C
Digital Timer	Range : 0-99.59 hrs (Settable in hrs, min and seconds), Digital display of set time and actual time (1-5999 minutes) , Modes of operation: heater cut off mode & alarm mode
Temperature Accuracy / Precision	± 0.5° C
Ramp & Hold	Integrated Auto Sequencing programs with 12 desirable sequence ramp / steps of time and temp. domain for each programme.
Presets	Selectable Programs(Customizable): Integrated Auto Sequencing Features with 30 intelligent memory programs
Heater Source	Casted Aluminium Alloy Heaters
PID Control	Fuzzy logic Microprocessor based PID Controller with Auto tuning facility.
TemperatureSetting	Feather touch membrane keys
PC & Printer Connectivity	Direct USB port for PC/Laptop connectivity Intelligent Software for PC compatibility for 2 way Bidirectional communication
Display	Bright Digital two line Alphanumeric LCD Digital Display of time and temperature
Extraction Thimbles	* Thick Nitrocellulose thimble (f25mm X 80mm) - 1 Box of 25 Nos. * Highly versatile to accommodate 2 sizes of Thimbles. Optional Macro Thimbles of size (33 mm dia x 80mm L) compatible in the system.
Power Consumption	2000 Watts.

WATER DISTILLATION WITH CHILLER

Safety Features

- Auto cut off of heater, when the water supply to the condenser is unavailable.
- Auto cut off of power to the Heater and condenser valve, on collection of sufficient distilled water in the tank.
- Water level monitoring window.
- Over voltage Circuit breaker protection.
- Complete shutdown of system on achieving the set water level in the distilled water container.
- Auto switching ON of the system when the water level is below the set level.
- Easy and safe dismantling of steam generator and water condenser for cleaning and removing of scale formation.
- Space saving, compact and user friendly.

Model No.	Capacity/Hr	Price/Pack
GLWS.DAN.05	2 Ltr/hr	Price on Request

Technical Specification :

Steam Generator Dual	High grade SS Steam Generator
Water condenser Dual	High grade SS Water condenser
Housing material of construction	MS with powder coated finish
Water level monitoring & control	Photo electric sensor
Rate of Distillation	1.5 lit/Hour double distillation
Heater	Dual Immersion Heater
Heater wattage	2500 W each
Distilled water collection tank	Dual PVC Collection tank
Distilled water tank capacity	5 lit
Membrane key pad with indications	4.3" Touch with membrane keyboard
Electrical Requirement	230V/50 Hz/single phase



ALL GLASS WATER DISTILLATION (AUTOMATIC)

This has been designed for better and accurate control of the distillation unit. It has been incorporated with advanced microcontroller based electronic circuitry, which gives an easy user machine interaction.

The alpha numeric LCD which has been used shows all messages that correspond to the running of the machine.

- Environment friendly & suitability
- One Touch Use, Fully Automatic, Intelligent, dual stage all glass type
- Fully automatic control save energy & money- By setting the required output volume in liters. After completion of the process heater is turned off and the cooling water inlet is closed automatically.
- Boiler empty detection intelligence built in- when the water level inside the boiler drops below the heater, boiler empty condition is detected.
- Gate Valve to oneside - Conserves cooling water wastage in case of power failure
- Flow switch - In built safety feature for the equipment unit shut off in case of cooling water failure. When the inlet water flow to the unit is low, this error is displayed with buzzer indication. The process is paused until the inlet flow is resumed.
- Easy to read Alpha numeric LCD and keypad for all settings and messages that correspond to the running of the machine.
- Auto cleaning detection
- Probe error detection
- Soft Calibration of output volume to compensate seasonal temperature and flow rate changes
- Manual overriding flow sensor and Gate (solenoid) valve
- Serviceability Replaceable Silica sheathed (Quartz) Heater
- Safety of user & instrument against wattage/power variation



Model No.	Capacity/Hr	Price/Pack
DN.WD.01	2 Ltr/hr	Price on Request
DN.WD.02	4 Ltr/hr	Price on Request

Technical Specification :

Output Cap. (approx.)	2 ltrs/hr	4 ltrs/hr
Stage	Double Stage	Double Stage
Cooling water requirement (approx.)	2 ltr/min	2-4 ltr/min
Conductivity uS/cm	0.8-1.0	0.8-1.0
Power Rating (Total)	3.0KW	6.0KW
AC Voltage	220-240VAC	220-240VAC
AC Frequency	50-60Hz	50-60Hz

Automatic Fibre Estimation System – (6 Place) Auto-Sequencing

NEW

- Designed to protect electronics from acid / alkali wet area & heat zone
- Independent loading of sample with individual mechanical controls
- Auto acoustic alarm on completion of process
- Auto power off mode on completion of process
- Inbuilt safety features like auto error indication, auto over temperature protection and auto sensor break protection
- PC chart software performs Live graphical representation of time / temperature gradient on PC Connectivity

Model No.	Price/Pack
DN.AFES.6P	Price on Request



Technical Specification :

Description	Automatic Six Place PC Compatible Autosequencing Regular Version Fibre Estimation System
Display	Bright Digital two line Alphanumeric LCD Digital Display of time and temp.
No. of Positions	Six Samples
Sample Size	0.1 to 4 gms (depending on the type of sample)
Temperature Control Range	RT- 500° C (Continuously variable)
Digital Timer	0-99.59 hrs (Settable in hrs, min and seconds), Digital display of set time and actual time (1-5999 minutes) , Modes of operation: heater cut off mode & alarm mode
Temperature Accuracy / Precision	± 0.5° C
Ramp & Hold	Integrated Auto Sequencing programs with 12 desirable sequence ramp / steps of time and temp. domain for each programme
Presets	Selectable Programs(Customizable): Integrated Auto Sequencing Features with 30 intelligent memory programs
Heater Source	Ceramic Infrared Heater
PID Control	Fuzzy logic Microprocessor based PID Controller with Auto tuning facility
Temperature Setting	Feather touch membrane keys
Crucibles	Sintered Silica glass Crucible with P1 Porosity disc (6 Nos.)
Extractor	Marked borosilicate extraction vessel
Preheating Hotplate	Fibra Flow System with self priming pump connected to water suction filter pump.
Power Consumption	2500 Watts.
PC & Printer Connectivity	Direct USB port for PC/Laptop connectivity Intelligent Software for PC compatibility for 2 way Bidirectional communication

COD Digestion System

NEW

Safety Features

- Stainless steel insert rack to handle.
- COD Digestion tubes.
- MS rack to keep Air condensers.
- MS rack with hole to place insert rack with tubes for adding reagents in water.
- Stainless steel water tank.



Model No.	Price/Pack
DEN.N15CT.01	Price on Request

Technical Specification :

Model	DEN.N15CT.01 (TOUCH SCREEN CONTROLLER)
No of samples	15
Tube dimension	36 x 200 mm
Tube capacity	150ml
Tube material	Glass with ground joint
Reflux condenser	Air condenser with ground joint
Reflux condenser dimension	640mm
Heating block	Extruded Aluminium block
Well depth	90mm
Material of construction of housing	MS with powder coated finish
Heater	Casted Aluminium alloy Heater
Heater wattage	2000 W
Temperature controller	PID controller
Process controller	4.3" TFT with touch screen
Temperature range	50 degree to 300 degree
Temperature accuracy	+/- 1%
Temperature sensor	K type thermocouple
Block insulation	Ceramic wool
No of Programs	5 program
No of steps	5 steps
Type of program	Time and Temperature
Feature touch membrane key pad	Power and Heater
Over voltage protection	By circuit breaker
Electrical requirement	230V/50Hz/10A
Unit dimension	56 x 14 x 36 Inches (L x B x H)

Hot Air Oven Cum Incubator NEW

- Dual operation of Incubator and Hotair oven in same unit.
- Forced air circulation by convection
- Shelf Height adjustable to 7 heights
- Round folding at the four corners for easy cleaning.
- Glass window for viewing
- Automatic cut off of Heater and blower when the door is opened.
- Additional port for cross checking the temperature of the chamber.
- Over voltage circuit breaker.



Model No.	Price/Pack
3900.DNEU.03	Price on Request

Technical Specification :

Material of construction	Outer MS with powder coated finish and Inner stainless steel
Capacity	91 lit
Dual Mode Operation (2 in 1)	Hot air Oven Mode or Incubator Mode
Inner dimension	450 x 450 x 450 mm
Outer dimension	560 x 610 x 680mm
Process controller	4.3" TFT Touch screen controller
Display	Feather touch membrane key pad with touch screen. (Power, Oven, Incubator, heater)
Temperature controller	HMI
Temperature Range	5 degree above ambient to 200 degree
Temperature accuracy	At 120Degree-+/- 1%, At 37 Degree- +/- 0.1 Degree
Temperature sensor	PT 100
Number of program	5
Number of steps	5
Programmable for	Temperature and time
Heater	Strip Heater
Heater wattage	Oven-1625 W and Incubator-325 W
No of Trays	2
Chamber insulation	Ceramic wool
Over temperature protection	Using thermostat
Electrical requirement	230v/50Hz/10A

B.O.D Incubator **NEW**

- Temperature Uniformity- $\pm 1^{\circ}\text{C}$
- Temperature sensor- PT-100
- Temperature Controller
- PID temperature controller
- LED display of SV & PV
- Construction- Double walled with PUF Insulation
- Inner Construction- Stainless Steel 304 grade
- Exterior Construction- Powder Coated GI sheet
- Exterior Door- Solid door with lock & key
- Inner door- Glass door to view samples
- Trays- Stainless steel perforated trays
- Interior illumination- LED Light
- Heating Element- U-shaped SS tubular heaters
- Refrigeration System- CFC Free Compressor
- Air Circulation- Motorized Blower / Axial fan
- Safety- Temperature High / Low alarm
- Door open buzzer
- Caster wheels with brake
- With Test Certificate"



Model No.	Price/Pack
4200.DNEU.04	Price on Request

Technical Specification :

Temperature Range	5°C to 60°C
Temperature Accuracy	$\pm 0.5^{\circ}\text{C}$
Dimensions	600x600x600 mm
volume	260 ltr.
No. of tray	2
Power supply	220 Volts 50 Hz

Laminar Air Flow Horizontal

NEW

Safety Features

- Microprocessor LCD Controller
- Digital display for air flow rate
- Transparent Front Door
- Gauges Pressure (Statics Pressure Mano-Mater)
- Magnahelic Gauge (for filter pressure)
- U. V. Germicidal Tube in work area
- Electronic Filter choke alarm
- Spare HEPA Filters
- Auto switch on/off for U.V. Germicidal tube & fluorescent light
- Hour Meter for UV light with Test Certificate



Model No.	Price/Pack
4150.DNEU.04	Price on Request

Technical Specification :

Size:	4'x2'x2'
Size of Hepa:	4'x2'x6:-'
No. of Hepa:	1 Nos
Cleaness :	Class 100
Velocity:	90 FPM +/-20
Hepa Filter:	99.99% For particles >0.3 μ m
Prefilter:	85 %efficiency for particles >0.5 μ m (Washable)
Particle Count:	Better than US Fed Std 209B Class10 and VDI 2083 Class 3
Cabinet:	Laminated High Quality Wooden Board /PCRC Sheet Powder Coated/ Stainless Steel SS 304(optional 316 grade)
Work Table :	304 Stainless Steel (optional 316 grade)
Airflow Speed:-	Control Speed Controller (Three Step Speed Controller)
Blower :-	High efficient centrifugal type with lifetime light
Light:-	High intensity, low wattage >800 luxlubricated bearings
Noise Level:-	<55 dBA
Standard Accessories:-	Air/gas cock and mains power socket (16A)
Power Supply:-	220-230 V,50 Hz.

Hot Air Oven **NEW**

- Low cost, Fully Equipped
- Sturdy construction of PCGI (Powder coated Galvanized Steel).
- Damper controlled gravity air circulation
- Made from Stainless Steel (SS-304 grade)
- Primary hydraulic control thermostat sets desired oven temperature. Red pilot light indicates heater operation.
- Heat is transferred from the bottom up through the oven chamber by natural convection and exits through vent in the oven sides. Fresh air inlet damper at the oven bottom provides control of the amount of fresh air entering the oven.
- Synthetic door gasket made of neoprene on the double walled door.
- User oriented design of shelves makes you adjust each space of shelves without difficulty.
- Heating elements are placed at bottom.
- Space between inner chamber and outer wall is filled with high grade mineral wool for minimal heat dissipation.
- Door fitted with heavy duty hinges and door handle ensuring there are no leakages through the door gasket.
- To work on 220/230V AV, 50/60 Hz supply.



Model No.	Price/Pack
4100.DNEU.02	Price on Request

Technical Specification :

No of Shelves	2
Temperature Range	50°C to 250°C
MOC (Outer)	Powder Coated Electro Galvanized Steel Sheet
MOC (Inner)	Galvanized Steel Sheet OR Stainless Steel Sheet
(Option)	
Temp. controller	Hydraulic type capillary thermostat
Temp. Accuracy	±1°C
Temp. Display	Thru prismatic thermometer
Power Supply	220/230V AC, 50/60Hz

Autoclave Portable 20 Litre

NEW

Safety Features

- Stainless steel (304) grade & seam less Body,
- With spring loaded safety valve with Pressure adjustment,
- Dead weight safety valve, steam release valve
- Pressure gauge 63mm dia
- 8 knobs inner chamber & tripod stand.
- Electrical works on 220/230 volt AC with 2 KW chord & 15 Amp Plug-top.
- Size dia (300x300mm)(20Ltr) with Test Certificate

Model No.	Price/Pack
1700.DNEU.00	Price on Request



Also Available

Autoclave Vertical 50 Litre

NEW

Safety Features

- Outer chamber and lid made of Stainless steel.
- Double walled with boiler & steam jacket.
- Gap is filled high grade glass wool.
- Neoprene rubber gasket by wing nut.
- Hinged bolts on rim of the cover.
- Provided with wing nut, dial pressure gauge,
- Air/Steam Cock.
- Water level indicator.
- Sprint loaded safety valve.
- Adjustable from 10 to 20 psi.
- Drain cock & double safety valve along with inlet.
- Inner dimensions (350x550mm), dimensions of basket 325x400mm.
- Capacity 50 Ltr.
- Heater load 3.0 KW. with Test Certificate.

Model No.	Price/Pack
1700.DNEU.02	Price on Request



Socket, Unprinted

Item Code	Socket Size	Approx. O.D. of tube (mm)	Total Length (mm)	Pack of	Price / Piece
001.202.02	10/19	13	120±10	10	117
001.202.03	12/21	16	120±10	10	124
001.202.04	14/23	18	120±10	10	131
001.202.05	19/26	22	125±10	10	145
001.202.06	24/29	28	135±10	10	145
001.202.07	29/32	32	135±10	10	255
001.202.08	34/35	38	150±10	10	338
001.202.09*	40/38	45	150±10	10	469
001.202.10	45/40	50	150±10	10	580
001.202.11*	50/42	55	150±10	10	718
001.202.12*	55/44	60	150±10	10	1007

* Non DIN



Buy Now!



Buy Now!

Cone, Unprinted

Item Code	Socket Size	Approx. O.D. of tube (mm)	Total Length (mm)	Pack of	Price /Piece
002.202.02	10/19	8	120±10	10	117
002.202.03	12/21	9	120±10	10	124
002.202.04	14/23	13	120±10	10	131
002.202.05	19/26	16	125±10	10	145
002.202.06	24/29	22	135±10	10	173
002.202.07	29/32	26	135±10	10	255
002.202.08	34/35	30	150±10	10	338
002.202.09*	40/38	36	150±10	10	469
002.202.10	45/40	40	150±10	10	580
002.202.11*	50/42	45	150±10	10	718
002.202.12*	55/44	50	150±10	10	1007

* Non DIN



Buy Now!

Cone, with drip tip, Unprinted

Item Code	Socket Size	Approx. O.D. of tube (mm)	Total Length (mm)	Pack of	Price /Piece
003.202.03	12/21	9	120±10	10	131
003.202.04	14/23	13	120±10	10	138
003.202.05	19/26	16	120±10	10	152
003.202.06	24/29	22	150±10	10	179
003.202.07	29/32	26	150±10	10	262
003.202.08	34/35	30	150±10	10	345
003.202.09*	40/38	36	150±10	10	476
003.202.10	45/40	40	150±10	10	600
003.202.11*	50/42	45	150±10	10	731
003.202.12*	55/44	50	150±10	10	1021

* Non DIN



Buy Now!





Buy Now!

Socket, Double

- Complies with DIN 12249

Item Code	Socket Size	Approx. O.D. of tube (mm)	Total Length (mm)	Pack of	Price / Piece
006.202.02*	10/19	14	135±2	10	173
006.202.03	14/23	18	135±2	10	179
006.202.04	19/26	22	140±2	10	228
006.202.05	24/29	28	170±5	10	276
006.202.06	29/32	32	170±5	10	380
006.202.07	34/35	38	180±5	10	476

* Non DIN



Buy Now!

Keck Clips for Joints

- Outstanding chemical resistant.
- Autoclavable with maximum temp of 135°C.

Item Code	N/S	Colour	Pack of	Price /Piece
007.204.03	14/23	Yellow	100	70
007.204.04	19/26	Blue	100	70
007.204.05	24/29	Green	100	77
007.204.06	29/32	Red	100	77

Spherical Joint, Ball

- Complies with DIN 12264
- Unprinted sockets to avoid getting printed charred
- Smooth grinding surface finish to avoid leakage

Item Code	Cup Joint (Male)	Code Approx. Bore	Minimum Shank Length (mm)	Pack of	Price / Piece
008.202.02	S13	5	100	10	317
008.202.03	S19	9	100	10	359
008.202.04	S29	15	100	10	476
008.202.05	S35	19	100	10	635
008.202.06	S41	27	100	10	1104



Buy Now!



Spherical Joint, Cup

- Complies with DIN 12264

Item Code	Cup Joint (Male)	Code Approx. Bore	Minimum Shank Length (mm)	Pack of	Price / Piece
009.202.02	S13	5	100	10	317
009.202.03	S19	9	100	10	359
009.202.04	S29	15	100	10	476
009.202.05	S35	19	100	10	635
009.202.06	S41	27	100	10	1104



Buy Now!



Gloves, Laboratory


- Made of Nitrile



Buy Now!

Item Code	Size (mm)	Pack of	Price /Pack
505.303.07	Small	50 Pairs	970
505.303.08	Medium	50 Pairs	970
505.303.09	Large	50 Pairs	970

Microscopic Slides

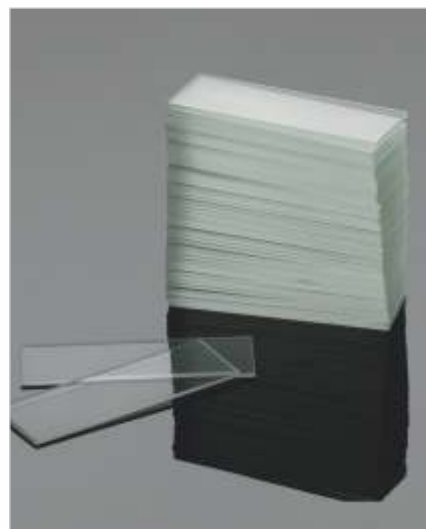

Buy Now!

Item Code	Size (mm)	Pack of	Price /Pack
565.303.01	Ground edges, Plain 76x26	50	121
565.303.02	Ground edges, Double sides frosted 76x26	50	197


Box, Slide

- Made of Polystyrene
- Are durable, compact & provide utmost protection to 1"x 3' slides
- Heavy walls will not warp, splinter or crack
- Boxes are unaffected by humidity and are thoroughly insect proof

Item Code	Quantity	Pack of	Price /Pack
129.303.01	25 Slides	12	1144
129.303.02	50 Slides	12	1956
129.303.03	100 Slides	6	1956



Buy Now!

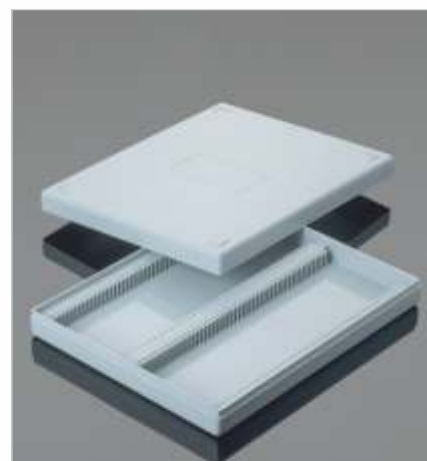

Cover Glass

- Comes in 0.13 - 0.17 mm Thickness

Item Code	Size (mm)	Pack/Pieces	Price /Pack
566.303.01	18 x 18	50	87
566.303.02	20 x 20	50	87
566.303.03	22 x 22	50	87
566.303.04	24 x 24	50	165



Buy Now!





Buy Now!

Soft Loop Sterile

- Made of Polystyrene

Item Code	Capacity	Pack of	Price / Pack
202.303.01	1ul (Soft Loopes)	100	610
202.303.02	10ul (Soft Loopes)	100	610



Buy Now!

Stirrer

- Made of Polypropylene
- Useful for stirring different solutions in the laboratory
- Are tough and long lasting

Item Code	Dia (mm)	Length (mm)	Pack of	Price /Pack
193.303.01	6	150	12	147
193.303.02	7	200	12	252
193.303.03	7	250	12	296
193.303.04	7	300	12	351
193.303.05	10	250	12	351

Wire Gauge

- Has Ceramic Center
- Goes Upto 800°C

Item Code	Size (mm)	Pack of	Price /Piece
524.303.01	100 x 100	10	690
524.303.02	125 x 125	10	810
524.303.03	150 x 150	10	870
524.303.04	200 x 200	10	1210



Buy Now!



Weighing Scoops

- Has open tubular arm
- Suitable for use when small quantity of dyes or powders are to be weighed

Item Code	Cap. (ml)	Pack of	Price /Piece
245.202.00	0.5	10	293
245.202.00A	1	10	263
245.202.00B	2	10	263
245.202.01	3	10	210
245.202.02	6	10	276
245.202.03	10	10	324



Buy Now!





Buy Now!

Glass Stirrer

- Ideal for very sensitive samples
- Made of polished 3.3 borosilicate glass

Item Code	O.D.x Length (mm)	Quantity	Price /Piece
090.202.02	7 x 150	20	35
090.202.02A	7 x 205	20	45
090.202.02B	7 x 255	20	45
090.202.02C	7 x 305	20	69
090.202.04	9 x 150	20	44
090.202.04A	9 x 205	20	69
090.202.04B	9 x 255	20	78
090.202.04C	9 x 305	20	78



Buy Now!

Boxes, Storage

- Made of polypropylene
- Prove to be an excellent option for storage of different powdered reagents & other material in the laboratory
- Square shape of these boxes help in saving shelf space
- Autoclavable
- Provide good chemical resistance & heavy duty service

Item Code	Size (ml)	Pack of	Price /Pack
189.303.01	250	12	720
189.303.02	500	12	911
189.303.03	1000	12	1199

Jars, Specimen

- Made from Soda glass
- Specially blown to give sturdiness and long life
- Top edges are flat ground
- Not recommended for use over a direct flame or on a hot plate
- Covers are made from Soda glass

Item Code	Approx Quantity L X B X H (mm)	Pack of	Price /Piece
208.303.03	210 X 170 X 130	1	2846
208.303.04	220 X 140 X 140	1	2846
208.303.05	225 X 225 X 125	1	4554
208.303.06	250 X 250 X 150	1	5813

*Prices on request for borosilicate specimen jar



Buy Now!



Watch Glass, Neutral Glass

Item Code	Size (mm)	Pack of	Price /Piece
564.303.07	50	10	30
564.303.08	65	10	36
564.303.09	75	10	48
564.303.10	100	10	99
564.303.11	125	10	85
564.303.12	150	10	115



Buy Now!



Parafilm M Dispenser

- Made of Acrylic
- Used for storing, dispensing and cutting Parafilm® M
- Can hold both 2" & 4" rolls, Tapes & labels
- Can be easily cut through super sharp serrated blades
- Openable top lid allow easy filling into the dispenser

Item Code	Size (LxWxH) mm	Pack of	Price /Pack
250.303.01	180 x 120 x 160	1	3284



Buy Now!



Natural Rubber Cones:

Item Code	Size (ml)	Pack of	Price /Pack
404.303.01	250	4	416
404.303.02	500	4	416
404.303.03	1000	4	708
404.303.04	2000	4	708
404.303.05	5000	4	860
404.303.06	10,000	4	1536



Buy Now!



Silicon Rubber Cones:

Item Code	Size (ml)	Pack of	Price /Pack
404.363.01	250	4	339
404.363.02	500	4	339
404.363.03	1000	4	599
404.363.04	2000	4	599
404.363.05	5000	4	768
404.363.06	10,000	4	1034



Buy Now!



SiO₂

Cat No.	DESCRIPTION	Pcs/Pack	Price Per Piece
355.202.01	Both end open Melting point capillary 5" long 1/100, 125mm	1 Vial	280
356.202.01	Plano Haemometer (Pack of 60)	1 Pcs	5464
357.202.01	Haemocytometer Standerd with WBC & RBC PPT.	1Set	5355
358.202.01	Neubauer Counting Chamber Standard	1Pcs	4546
359.202.01	SQUARE TUBES: Manufactured from borosilicate glass tubing • Capacity: 14.5 & 17Gram Use for to Measure Hemoglobin Percentage in Blood • Manufactured as per I.S.I.Specification.	1Pcs	316
360.202.01	ZERO ERROR 20CMM PIPETTE (HB PIPETTE) • Manufactured by borosilicate Glass Attached with Silicon Rubber Tubing • Piece Approximate (Length 6" O.D.6 mmX 1mm Wall thickness) • Manufactured as per I.S.I.Specification	1Pcs	156
361.502.01	DROPPER: Made of Glass with Rubber Bung	1Pcs	37
362.202.01	ESRITE PIPETTE: Packing Size 1 Pk (Contain 10 Pcs & 5 Pcs) • Made of Borosilicate Glass. • To be used for Erythrocyte Sedimentation Rate. • Available in two different types i.e. One End Ground & Other One is Graduated with Printed scale • Autoclavable	1Pcs	234
363.502.01	WESTERN GREEN PIPETTE: 1 Pck Consist 60Pcs. • Made of Borosilicate Glass. • Graduaction Printed on glass tubing. • One End Graduated to be use for Erythrocyte Sedimentation Rate. • Manufactured as per I.S.I. Specification • Autoclvable	1Pcs	215
364.202.01	W.G. Apparatus (E.S.R.) Powder Coated (6 Tube) • Made of Aluminium with Powder Coated for 6 ESR.	1Pcs	2829
365.202.01	W.B.C. PIPETTE: • Made of Borosilicate Glass. With Rubber Tubing attach with Mouth Piece individually pack	1Pcs	306
366.202.01	R.B.C. PIPETTE: • Made of Borosilicate Glass. With Rubber Tubing attach with Mouth Piece individually pack	1Pcs	306
367.202.01	NON HEPERNISED CAPILLARY 1/100, 75MM	1VIAL	202



Buy Now!

Variable Micropipette, High Performance Micro Volume Pipette, Single Channel

- Fully autoclavable & UV resistance
- "CE" mark awarded
- Click-stop system for digital volume setting.
- Ergonomic Design ensuring light weight & soft plunger movement.
- Two step plunger operation allows "reverse pipetting technique".
- Calibration as per DIN 12650 & EN-ISO 8655 standards.
- High accuracy and precision guaranteed.
- Individual serial No. permanently marked on each pipette.
- Calibration report enclosed with every pipette.
- Color coded for easy identification

Variable Micropipette

Item Code	Volume Range (μ l)	Variable Increment (μ l)	Colour	Pack of	Price /Pack
500.303.01	0.1 - 2.5	0.01		1	5750
500.303.02	0.5 - 10	0.1		1	5750
500.303.03	2 - 20	0.1		1	5750
500.303.04	5 - 50	0.5		1	5750
500.303.05	10 - 100	0.5		1	5750
500.303.06	50 - 200	1.0		1	5750
500.303.07	20 - 200	1.0		1	5750
500.303.08	100 - 1000	5.0		1	5750
500.303.09	200 - 1000	5.0		1	5750
500.303.10	500 - 5000	50.0		1	5750
500.303.11	1000 - 5000	50.0		1	5750
500.303.12	500 - 10000	100.0		1	5750
500.303.13	1000 - 10000	100.0		1	5750



Buy Now!

Fixed Micropipette

Item Code	Volume Range (μ l)	Colour	Pack of	Price /Pack
501.303.01	2.5		1	4100
501.303.02	5		1	4100
501.303.03	10		1	4100
501.303.04	20		1	4100
501.303.05	25		1	4100
501.303.06	50		1	4100
501.303.07	100		1	4100
501.303.08	200		1	4100
501.303.09	250		1	4100
501.303.10	500		1	4100
501.303.11	1000		1	4100
501.303.12	2000		1	4100
501.303.13	5000		1	4100
501.303.14	10000		1	4100

High Performance Micro Volume Pipette, Multi Channel

- Fully autoclavable.
- UV resistance.
- "CE"mark awarded.
- Click-stop system for digital volume setting.
- Ergonomic Design ensuring light weight & soft plunger movement.
- Two step plunger operation allows "reverse pipetting technique".
- Calibration as per DIN 12650 & EN-ISO 8655 standards.
- High accuracy and precision guaranteed.
- Individual serial No. permanently marked on each pipette.
- Calibration report enclosed with every pipette.
- Color coded for easy identification.
- Manifold can rotate 360° to allow convenient pipetting angle.
- One hand tip ejection.

Eight Channel Micropipette

Item Code	Volume Range (μl)	Increment (μl)	Colour	Pack of	Price /Pack
500.303.14	0.5 - 10	0.1	Dark Purple	1	21135
500.303.15	5 - 50	0.5	Red	1	21135
500.303.16	10 - 100	0.5	Orange	1	21135
500.303.17	20 - 200	0.5	Yellow	1	21135
500.303.18	30 - 300	1.0	Light Orange	1	21135



Buy Now!



Twelve Channel Micropipette

Item Code	Volume Range (μl)	Increment (μl)	Colour	Pack of	Price /Pack
500.303.19	0.5 - 10	0.1	Dark Purple	1	25000
500.303.20	5 - 50	0.5	Red	1	25000
500.303.21	10 - 100	0.5	Orange	1	25000
500.303.22	20 - 200	0.5	Yellow	1	25000
500.303.23	30 - 300	1.0	Light Orange	1	25000



Buy Now!



Universal Graduated Tips

Bulk Pack :

- Packed in Polyethylene bag with easy tearing.
- Perforation & Zip lock - Double sealing provides better protection against contamination and spillage while in use
- Free DNase, RNase, Human DNA, Pyrogen & PCR inhibitor
- All Micropipettes come in 1000 Pcs.



Buy Now!

10 µl Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.10.B	-	-	-	1000	577
500.10.S.B	✓	-	-	1000	759
500.10.FB	-	-	✓	1000	2686
500.10.S.L.B	✓	✓	-	1000	1044
500.10.S.FB	✓	-	✓	1000	3039
500.10.S.L.FB	✓	✓	✓	1000	3114



Buy Now!

10 µl Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.10XL.B	-	-	-	1000	577
500.10XL.S.B	✓	-	-	1000	759
500.10XL.FB	-	-	✓	1000	2686
500.10XL.S.L.B	✓	✓	-	1000	1044
500.10XL.S.FB	✓	-	✓	1000	3039
500.10XL.S.L.FB	✓	✓	✓	1000	3114



Buy Now!

20 µl Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.20.FB	-	-	✓	1000	2686
500.20.S.FB	✓	-	✓	1000	2931
500.20.S.L.FB	✓	✓	✓	1000	3114

50 μ l Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.50.FB	-	-	✓	1000	2686
500.50.S.FB	✓	-	✓	1000	2931
500.50.S.L.FB	✓	✓	✓	1000	3114



Buy Now!



100 μ l Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.100.FB	-	-	✓	1000	2686
500.100.S.FB	✓	-	✓	1000	2931
500.100.S.L.FB	✓	✓	✓	1000	3114



Buy Now!



200 μ l Universal Graduated Tips, 1000 Tips per pack

Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.200.B	-	-	-	1000	529
500.200.S.B	✓	-	-	1000	759
500.200.FB	-	-	✓	1000	2686
500.200.S.L.B	✓	✓	-	1000	1044
500.200.S.FB	✓	-	✓	1000	2931
500.200.S.L.FB	✓	✓	✓	1000	3114



Buy Now!





Buy Now!

1000 µl Universal Graduated Tips, 1000 Tips per pack					
Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.1000.B	-	-	-	500	794
500.1000.S.B	✓	-	-	500	1140
500.1000.FB	-	-	✓	500	3347
500.1000.S.L.B	✓	✓	-	500	1649
500.1000.S.FB	✓	-	✓	500	3572
500.1000.S.L.FB	✓	✓	✓	500	4119



Buy Now!

1250 µl Universal Graduated Tips, 1000 Tips per pack					
Item Code	Sterile	Low Retention	Filter	Pack of	Price /Pack
500.1000XL.B	-	-	-	500	794
500.1000XL.S.B	✓	-	-	500	1140
500.1000XL.FB	-	-	✓	500	3347
500.1000XL.S.L.B	✓	✓	-	500	1649
500.1000XL.S.FB	✓	-	✓	500	3572
500.1000XL.S.L.FB	✓	✓	✓	500	4119



Buy Now!

Pipette Stand, Acrylic

Item Code	Capacity	Pack of	Price /Pack
590.303.01	1 Pipette	1	1694
590.303.02	4 Pipettes	1	2321
590.303.03	6 Pipettes	1	2729

Rack

- Fully autoclavable & Stackable
- Hinge rack allows single hand operation
- Color coded tray for Easy identification
- Free from DNase, RNase, Human DNA, Pyrogen & PCR inhibitor

Item Code	Tips Volume (ul)	Description (1 Box Consist of)	Sterile	Low Retention	Filter	Pack	Price / Per Box
500.10.R	10	96 Tips x10 Racks	-	-	-	1	2390
500.10.S.R	10	96 Tips x 10 Racks	✓	-	-	1	2590
500.10.FR	10	96 Tips x 10 Racks	-	-	✓	1	3767
500.10.S.L.R	10	96 Tips x 10 Racks	✓	✓	-	1	2772
500.10.S.FR	10	96 Tips x 10 Racks	✓	-	✓	1	3908
500.10.S.L.FR	10	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.10XL.R	10 (Long)	96 Tips x 10 Racks	-	-	-	1	2397
500.10XL.S.R	10 (Long)	96 Tips x 10 Racks	✓	-	-	1	2590
500.10XL.FR	10 (Long)	96 Tips x 10 Racks	-	-	✓	1	3795
500.10XL.S.L.R	10 (Long)	96 Tips x 10 Racks	✓	✓	-	1	2772
500.10XL.S.FR	10 (Long)	96 Tips x 10 Racks	✓	-	✓	1	3908
500.10XL.S.L.FR	10 (Long)	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.20.FR	20	96 Tips x 10 Racks	-	-	✓	1	3795
500.20.S.FR	20	96 Tips x 10 Racks	✓	-	✓	1	3908
500.20.S.L.FR	20	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.50.FR	50	96 Tips x 10 Racks	-	-	✓	1	3795
500.50.S.FR	50	96 Tips x 10 Racks	✓	-	✓	1	3908
500.50.S.L.FR	50	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.100.FR	100	96 Tips x 10 Racks	-	-	✓	1	3795
500.100.S.FR	100	96 Tips x 10 Racks	✓	-	✓	1	3908
500.100.S.L.FR	100	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.200.R	200	96 Tips x 10 Racks	-	-	-	1	2279
500.200.S.R	200	96 Tips x 10 Racks	✓	-	-	1	2473
500.200.FR	200	96 Tips x 10 Racks	-	-	✓	1	3795
500.200.S.L.R	200	96 Tips x 10 Racks	✓	✓	-	1	2675
500.200.S.FR	200	96 Tips x 10 Racks	✓	-	✓	1	3908
500.200.S.L.FR	200	96 Tips x 10 Racks	✓	✓	✓	1	4774
500.1000.R	1000	96 Tips x 6 Racks	-	-	-	1	1449
500.1000.S.R	1000	96 Tips x 6 Racks	✓	-	-	1	1700
500.1000.FR	1000	96 Tips x 6 Racks	-	-	✓	1	2655
500.1000.S.L.R	1000	96 Tips x 6 Racks	✓	✓	-	1	2210
500.1000.S.FR	1000	96 Tips x 6 Racks	✓	-	✓	1	2916
500.1000.S.L.FR	1000	96 Tips x 6 Racks	✓	✓	✓	1	3795
500.1000XL.R	1250	96 Tips x 6 Racks	-	-	-	1	1723
500.1000XL.S.R	1250	96 Tips x 6 Racks	✓	-	-	1	1984
500.1000XL.FR	1250	96 Tips x 6 Racks	-	-	✓	1	2806
500.1000XL.S.L.R	1250	96 Tips x 6 Racks	✓	✓	-	1	2400
500.1000XL.S.FR	1250	96 Tips x 6 Racks	✓	-	✓	1	3050
500.1000XL.S.L.FR	1250	96 Tips x 6 Racks	✓	✓	✓	1	10350




Autoclavable

Stackable



Buy Now!

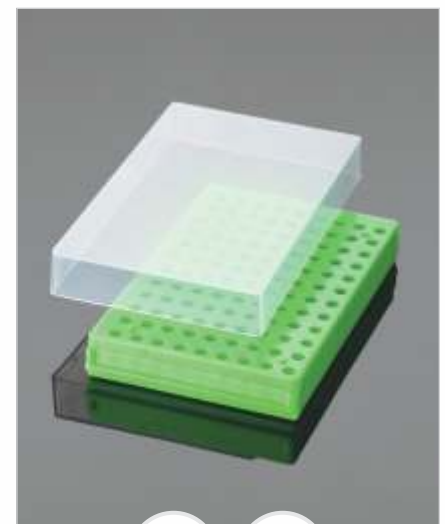

Autoclavable

Stackable



Buy Now!

Reloading Tray

- Reload rack with minimal efforts
- Tips pre- arranged in 8x12 format
- Minimal wastage
- Free from DNase, RNase, Human DNA, Pyrogen & PCR inhibitor

Item Code	Tips Volume (ul)	Description (1 Box Consist of)	Sterile	Low Retention	Pack of	Price / Per Box
500.10.K	10	96 Tips x10 Racks	-	-	1	1635
500.10.S.K	10	96 Tips x 10 Racks	√	-	1	1768
500.10.S.L.K	10	96 Tips x 10 Racks	√	√	1	2075
500.200.K	200	96 Tips x 10 Racks	-	-	1	1572
500.200.S.K	200	96 Tips x 10 Racks	√	-	1	1707
500.200.S.L.K	200	96 Tips x 10 Racks	√	√	1	2029
500.1000.K	1000	96 Tips x 5 Racks	-	-	1	1070
500.1000.S.K	1000	96 Tips x 5 Racks	√	-	1	1262
500.1000.S.L.K	1000	96 Tips x 5 Racks	√	√	1	1557
500.1000XL.K	1250	96 Tips x 6 Racks	-	-	1	1259
500.1000XL.S.K	1250	96 Tips x 6 Racks	√	-	1	1503
500.1000XL.S.L.K	1250	96 Tips x 6 Racks	√	√	1	1911

Tips Empty Racks



Buy Now!

Item Code	Capacity (ml)	Pack of	Price / Per Box
500.10.E.R	Tip rack empty for 10µl tips	1	1862
500.200.E.R	Tip rack empty for 200µl tips	1	1862
500.1000.E.R	Tip rack empty for 1000µl tips	1	1227
500.1000XL.E.R	Tip rack empty for 1250µl tips	1	1084

GLASSCO BOTTLE TOP DISPENSER

With Re-Circulation Valve

- Fully autoclavable at 121°C , 15 psi for 10-15 mins.
- “CE” mark awarded.
- Smooth & soft plunger for ease of working.
- Highly robust and reliable dispensing technique.
- It has re-circulation valve for re-directing the liquid into the bottle for bubble free dispensing without any loss of reagent.
- Adjustable delivery nozzle to facilitate dispensing ease in all demanding laboratory conditions. 180° Rotation for easy & effortless volume setting.
- Specially designed adapter allows 360° rotation, providing full flexibility in working.
- Specially designed, springless, PTFE valve manifold ensures high chemical compatibility and jamming free valve functioning.
- PTFE Piston with ETP O-Ring ensures very high chemical compatibility & wiper like smooth, effortless piston movement.
- Adaptors to fit most of the laboratory reagent bottles are provided in the following sizes : 28,30,32,36,40 & 45 mm.
- Calibration as per ISO 8655 standards.



Specifications & Ordering Information

Model No.	Vol. Range	Increment	ISO 8655 Specifications				Glassco Specifications					Price / Piece
			CV		CV		Accuracy		CV		Pack of	
			±%	± ml	±%	± ml	±%	± ml	±%	± ml		
500.444.01	0.25-2.5 ml	0.5 ml	0.6	0.015	0.2	0.005	0.6	0.015	0.2	0.005	1	24200
500.444.02	0.5-5 ml	0.1 ml	0.6	0.030	0.2	0.010	0.5	0.025	0.1	0.005	1	24200
500.444.03	1-10 ml	0.2 ml	0.6	0.060	0.2	0.020	0.5	0.050	0.1	0.010	1	24200
500.444.04	2.5-30 ml	0.5 ml	0.6	0.180	0.2	0.060	0.5	0.150	0.1	0.030	1	24200
500.444.05	5-60 ml	1.0 ml	0.6	0.360	0.2	0.120	0.5	0.300	0.1	0.060	1	24200
500.444.06	10-100 ml	2.0 ml	0.6	0.600	0.2	0.200	0.5	0.500	0.1	0.100	1	24200



Buy Now!

GLASSCO BOTTLE TOP DISPENSER

Without Re-Circulation Valve

Model No.	Vol. Range	Increment	ISO 8655 Specifications				Glassco Specifications					Price / Piece
			CV		CV		Accuracy		CV		Pack of	
			±%	± ml	±%	± ml	±%	± ml	±%	± ml		
500.555.01	0.25-2.5 ml	0.5 ml	0.6	0.015	0.2	0.005	0.6	0.015	0.2	0.005	1	14500
500.555.02	0.5-5 ml	0.1 ml	0.6	0.030	0.2	0.010	0.5	0.025	0.1	0.005	1	14500
500.555.03	1-10 ml	0.2 ml	0.6	0.060	0.2	0.020	0.5	0.050	0.1	0.010	1	14500
500.555.04	2.5-30 ml	0.5 ml	0.6	0.180	0.2	0.060	0.5	0.150	0.1	0.030	1	21200
500.555.05	5-60 ml	1.0 ml	0.6	0.360	0.2	0.120	0.5	0.300	0.1	0.060	1	21200
500.555.06	10-100 ml	2.0 ml	0.6	0.600	0.2	0.200	0.5	0.500	0.1	0.100	1	25500



Buy Now!



GLASSCO BOTTLE TOP DISPENSER

With Dual Inlet Technology

PATENTED

- Fully autoclavable at 121°C , 15 psi for 10-15 mins.
- “CE” mark awarded.
- Refill the bottle & rinse the instrument WITHOUT DISMOUNTING from bottle.
- Patented technology that combines unique functionality, user-friendliness & performance.
- First ever Dispenser offering Dilution , Rinsing , Dual Liquid Handling & Re-circulation in a single unit.
- Adjustable delivery nozzle to facilitate dispensing ease in all demanding laboratory conditions
- 180° Rotation for easy & effortless volume setting.
- Specially designed adapter allows 360° rotation, providing full flexibility in working.
- Specially designed, springless, PTFE valve manifold ensures high chemical compatibility and jamming free valve functioning.
- PTFE Piston with ETP O-Ring ensures very high chemical compatibility & wiper like smooth, effortless piston movement.
- Adaptors to fit most of the laboratory reagent bottles are provided in the following sizes : 28,30,32,36,40 & 45 mm.
- Calibration as per ISO 8655 standards.



1. STANDARD DISPENSING Knob A - Open Knob B - Closed

In this mode the dispenser dispenses the liquid normally into the receiver from the bottle it is mounted on.

2. PURGING Knob A - Open Knob B - Closed

In this mode the liquid is re-circulated into the same bottle on which the dispenser is mounted. This process removes the air from the dispenser without wasting any reagent.



3. DILUTION/RINSING/SECOND LIQUID DISPENSING Knob A - Open Knob B - Closed

In this mode the liquid from a second source can be dispensed into the receiver. The second liquid can be distilled water, thus allowing the user to rinse the instrument without dismounting from the bottle or for dilution of the reagent in the receiver.

4. BOTTLE REFILLING Knob A - Open Knob B - Closed

In this mode the liquid from a second source can be used to refill the bottle without dismounting the dispenser.



Specifications & Ordering Information

Model No.	Vol. Range	Increment	ISO 8655 Specifications				Glassco Specifications					
			Accuracy ±%		CV ± ml		Accuracy ±%		CV ± ml		Pcs/ Pack	Price / Piece
500.450.01	0.25-2.5 ml	0.5 ml	0.6	0.015	0.2	0.005	0.6	0.015	0.2	0.005	1	35750
500.450.02	0.5-5 ml	0.1 ml	0.6	0.030	0.2	0.010	0.5	0.025	0.1	0.005	1	35750
500.450.03	1-10 ml	0.2 ml	0.6	0.060	0.2	0.020	0.5	0.050	0.1	0.010	1	35750
500.450.04	2.5-30 ml	0.5 ml	0.6	0.180	0.2	0.060	0.5	0.150	0.1	0.030	1	46750
500.450.05	5-60 ml	1.0 ml	0.6	0.360	0.2	0.120	0.5	0.300	0.1	0.060	1	46750
500.450.06	10-100 ml	2.0 ml	0.6	0.600	0.2	0.200	0.5	0.500	0.1	0.100	1	59400



Buy Now!

Stand, Retort

- Complies with DIN 12892
- Stand material, mild steel, blue powder coated
- Rod Material, mild steel, chrome plated with L-Key

Item Code	Stand Size (mm)	Rod Size (Length x Dia) mm	Pack of	Price /Pack
309.303.01	150 x 100	500 x 12	2	1638
309.303.02	200 x 125	600 x 12	2	2300
309.303.03	250 x 150	750 x 12	2	3108



Buy Now!



Stand, Retort

- Complies with DIN 12892
- Stand material, Cast Iron, black painted
- Rod Material, mild steel, chrome plated with L-Key

Item Code	Stand Size (mm)	Rod Size (Length x Dia) mm	Pack of	Price / Pack
310.303.01	150 x 100	950 x 10	2	1420
310.303.02	175 x 125	600 x 12.5	2	1642
310.303.03	200 x 125	600 x 12.5	2	1770
310.303.04	200 x 125	600 x 12	2	1908
310.303.05	225 x 150	750 x 12	2	2970
310.303.06	250 x 150	600 x 12	2	3450
310.303.07	250 x 200	750 x 12	2	4548
310.303.08	300 x 175	900 x 12	2	5256
310.303.09	250 x 150	750 x 12	2	3802



Buy Now!





MS

Black Paint

With Bosshead



Buy Now!

Ring, Retort

- Material Mild Steel, black painted
- Available with boss head

Item Code	Size (mm)	Pack of	Price /Pack
313.303.01	50	4	884
313.303.02	62.5	4	884
313.303.03	75	4	1012
313.303.04	100	4	1012
313.303.05	125	2	556
313.303.06	150	2	556
313.303.07	200	2	580



MS

Chrome Plated

With Bosshead



Buy Now!

Rod, Retort

- Material Iron, chrome plated

Item Code	Size (mm)	Material	Pack of	Price / Pack
371.303.01	500	Chrome	2	89
371.303.02	600	Chrome	2	113
371.303.03	750	Chrome	2	145
371.303.04	500	SS	2	164
371.303.05	600	SS	2	190
371.303.06	750	SS	2	234

- Material mild steel, chrome plated
- Bosshead to steel rod dia 14mm



Buy Now!

Item Code	Rod/Boss Head Length (mm)	Rod/Boss Head Dia (mm)	Type	Ring	Pack of	Price / Pack
393.303.01	160	7	50	Rod	4	1212
393.303.02	200	7	70	Rod	4	1264
393.303.03	220	8	100	Rod	4	1464
393.303.04	220	8	120	Rod	2	810



MS

Chrome Plated

With Bosshead



Buy Now!

Ring, Retort

- Material mild steel, chrome plated
- Available with rod or bosshead
- Bosshead to steel rod dia 14mm

Item Code	Rod/Boss Head Length (mm)	Rod/Boss Head Dia (mm)	Type	Ring	Pack of	Price / Pack
393.303.06	70	7	50	Bosshead	4	1516
393.303.07	70	7	70	Bosshead	4	1388
393.303.08	70	8	100	Bosshead	4	1592
393.303.09	70	8	120	Bosshead	2	884

Clamp, Retort

- Complies with DIN 12894
- Cross pattern
- Die-casted
- To hold upto 65 mm

Item Code	Type	Pack of	Price /Pack
324.303.01	Aluminium, Cork Lined	2	858
324.303.04	Zinc, Cork Lined	2	810



Buy Now!



Clamp, Retort

- Complies with DIN 12894
- 3 Prong
- Material Aluminium, diecasted - Powder Coated
- Hold upto 50-65 mm circle
- MS Rod chrome plated

Item Code	Type	Pack of	Price /Pack
326.303.02	3 Prong	2	922



Buy Now!





Clamp, Universal

- Complies with DIN 12894
- Cork Lined
- Material Aluminium diecasted, powder coated
- MS Rod chrome plated
- Hold upto 50-65 mm circle



Buy Now!

Item Code	Type	Pack of	Price /Pack
328.303.01	Cork Lined	2	910



Clamp, Condenser

- 4 Prong
- Material Aluminium, Powder Coated
- Hold upto 125 mm circle
- MS Rod chrome plated



Buy Now!

Item Code	Type	Pack of	Price /Pack
334.303.02	4 Prong	2	2248

Clamp, Condenser

- 3 Prong
- Material Aluminium, Powder Coated
- To hold upto 125 mm circle
- MS Rod chrome plated

Item Code	Type	Pack of	Price /Pack
335.303.02	3 Prong	2	2248


[Buy Now!](#)

AI
Diecasted

MS
Rod

 White Powder
Coated

3 Prong

Clamp, Retort, Euro Design

- 3 Prong to hold upto 75 mm
- Spring tube, double keys
- Rod with dia 7.5 mm & Length 235 mm
- Material Zinc Alloy, pressure diecasted, Chrome Coated
- Freely swivel, bosshead lockable at 360°C for 14 mm grip

Item Code	Type	Pack of	Price /Pack
390.303.01	PVC sleeve with rod	2	1074
390.303.02	Silicone sleeve with rod	2	1138
390.303.03	PVC sleeve with boss Head	2	1416
390.303.04	SILICONE sleeve with boss Head	2	1516


[Buy Now!](#)

AI
Diecasted

MS
Rod

 White Powder
Coated

3 Prong

 With
Bosshead

SiO₂
Sleeved

ZINC
Alloy



Clamp, Retort (Euro Design)

- 2 Prong to hold upto 80 mm
- Spring tube, double keys
- Rod with dia 7.5 mm & Length 235 mm
- Material Zinc Alloy, pressure diecasted, Chrome Coated
- Freely swivel, bosshead lockable at 360°C for 14 mm grip



Buy Now!

Item Code	Type	Pack of	Price /Pack
391.303.01	Cork Lined with rod	2	1112
391.303.02	PVC sleeve with rod	2	1126
391.303.03	SILICONE sleeve with rod	2	1126
391.303.04	Cork lined with boss head	2	1416
391.303.05	PVC sleeve with boss head	2	1402
391.303.06	SILICONE sleeve with boss head	2	1478



Boss Head

- Complies with DIN 12895
- Material Cast Iron, black painted
- Use with retort stand & Condenser Clamp
- To hold upto 25mm



Buy Now!

Item Code	Type	Pack of	Price /Pack
337.303.03	Hold upto 25mm	4	1972

Boss Head

- Complies with DIN 12895
- To hold upto 20 mm
- Material Cast Iron, black painted
- Use with retort stand & Condenser Clamp

Item Code	Type	Pack of	Price /Pack
338.303.03	Hold upto 20mm	4	1112



Buy Now!



Boss Head

- Complies with DIN 12895 standard
- Material Aluminium/Zinc, Powder Coated
- To hold upto 16 mm

Item Code	Type	Pack of	Price /Pack
341.303.01	Aluminium, Round Screw	4	860
341.303.02	Aluminium, Thumb Screw	4	1064
341.303.04	Zinc, Round Screw	4	736
341.303.05	Zinc, Thumb Screw	4	1036



Buy Now!





Buy Now!

Stand, Tripod

- Material Cast Iron, black painted
- Available with Round or triangle top

Item Code	Size (mm)	Top	Pack of	Price /Pack
344.303.01	100 x 150	with round top	1	297
344.303.02	100 x 175	with round top	1	310
344.303.03	100 x 200	with round top	1	322
344.303.04	125 x 150	with round top	1	322
344.303.05	125 x 175	with round top	1	335
344.303.06	125 x 200	with round top	1	347
344.303.07	100 x 150	with triangle top	1	278
344.303.08	100 x 175	with triangle top	1	290
344.303.09	100 x 200	with triangle top	1	310
344.303.10	125 x 150	with triangle top	1	329
344.303.11	125 x 175	with triangle top	1	322
344.303.12	125 x 200	with triangle top	1	335



Buy Now!

Burner, Bunsen

- Material Casted Iron Black painted
- Brass pipe, chrome plated
- Concentrated higher flame
- With Stopcock
- Use with L.P.G.

Item Code	Type	Pack of	Price /Pack
347.303.01	Brass pipe, Single Walled	1	669
347.303.02	Brass pipe, Double Walled	1	721

Burner, Meaker

- Complies with DIN 30665
- Material Casted Iron base, Red painted
- Brass pipe chrome plated
- Without Stopcock
- Use with L.P.G.

Item Code	Pack of	Price /Pack
348.303.01	1	1200



Buy Now!



Burner, Meaker

- Complies with DIN 30665
- Material Casted Iron base, Red painted
- Brass pipe chrome plated
- Use with L.P.G.

Item Code	Type	Pack of	Price /Pack
349.303.01	With stopcock	1	1498
349.303.02	With stopcock, Economy	1	1416



Buy Now!





SS



Buy Now!

Jack, Laboratory

All sizes are in millimeters.

Item Code	Type	Size (mm)	Pack of	Price /Pack
370.303.09	Stainless Steel	120 x 140	1	6318
370.303.10	Stainless Steel	200 x 200	1	9098
370.303.11	Stainless Steel	250 x 250	1	12257



SS
202



Buy Now!

Spatula

• Material Stainless Steel, Grade 202

Item Code	Size (mm)	Type	Pack of	Price /Pack
374.303.01	125	one end spoon and one end flat	10	500
374.303.02	150	one end spoon and one end flat	10	630
374.303.03	200	one end spoon and one end flat	10	890
374.303.04	250	one end spoon and one end flat	10	1080
374.303.05	300	one end spoon and one end flat	10	1320

Spatula

- Material Stainless Steel, Grade 202

Item Code	Size (mm)	Type	Pack of	Price /Pack
374.303.06	125	both end flat	10	500
374.303.07	150	both end flat	10	630
374.303.08	200	both end flat	10	890
374.303.09	250	both end flat	10	950


[Buy Now!](#)

SS
202
Spatula, Double

- Material Stainless steel, Grade 202
- One end Chattaway & one end flat

Item Code	Size (mm)	Pack of	Price /Pack
375.303.01	155	10	690
375.303.02	210	10	760
375.303.03	250	10	950


[Buy Now!](#)

SS
202



SS
202



Buy Now!

Spatula, Double

- Material Stainless steel, Grade 202
- One end tapered, & one end flat, flexible type

Item Code	Size (mm)	Pack of	Price /Pack
376.303.01	155	10	820
376.303.02	260	10	1320
376.303.03	305	10	1390



SS
202



Buy Now!

Spatula, Micro

- Material Stainless steel, Grade 202
- One end spoon and one side spatula

Item Code	Size (mm)	Pack of	Price /Pack
377.303.01	155	10	760

Spatula, Knife

- Material SS grade 202
- Available with Wooden Handle

Item Code	Size (mm)	Pack of	Price /Pack
541.303.01	100	6	1230
541.303.03	150	6	1320
541.303.04	200	6	1950
541.303.05	250	6	2150
541.303.06	300	6	2300



Buy Now!



SS
202

Forceps

- Material SS 410 Grade
- Straight fine points

Item Code	Size (mm)	Pack of	Price /Pack
531.303.01	100	10	570
531.303.02	125	10	820
531.303.03	150	10	950
531.303.04	200	10	1260
531.303.05	250	10	1390
531.303.06	300	10	1710



Buy Now!



SS
410

Straight
Fine



SS
410

Curved
Fine



Buy Now!

Forceps

- Material SS 410 Grade
- Curved Fine Points

Item Code	Size (mm)	Pack of	Price /Pack
532.303.01	100	10	630
532.303.02	125	10	950
532.303.03	150	10	1130
532.303.04	200	10	1260
532.303.05	250	10	1580
532.303.06	300	10	1840



SS
410



Buy Now!

Forceps

- Material SS 410 Grade
- Straight Blunt Points

Item Code	Size (mm)	Pack of	Price /Pack
533.303.01	100	10	570
533.303.02	125	10	820
533.303.03	150	10	950
533.303.04	200	10	1260
533.303.05	250	10	1390
533.303.06	300	10	1710

Forceps

- Material SS 410 Grade
- Curved Blunt Points

Item Code	Size (mm)	Pack of	Price /Pack
534.303.01	100	10	630
534.303.02	125	10	890
534.303.03	150	10	1080
534.303.04	200	10	1260
534.303.05	250	10	1520
534.303.06	300	10	1770



Buy Now!



SS
410

Curved
Fine

Dissecting Set

- Instruments made of SS Grade 202
- Set of 14 Instruments

Item Code	Description	Pack of	Price / Piece
536.303.01	made of Stainless Steel, Instruments are Dressing Scissor, Cuticle Scissor, Dressing Forceps, Dissecting Forceps, Flapper, Seeker, Arrow Needle, Needle, Blow Pipe, B.P Handle with Scalpel Blade, Dropper, Chain Hook, Scalpels, Magnifier Lense.	Zip	1024



Buy Now!



SS
202

Dissecting Set

- Instruments made of SS Grade 202
- Set of 14 Instruments

Item Code	Description	Pack of	Price / Piece
536.303.02	made of Stainless Steel, Instruments are Dressing Scissor, Cuticle Scissor, Dressing Forceps, Dissecting Forceps, Flapper, Seeker, Arrow Needle, Needle, Blow Pipe, B.P Handle with Scalpel Blade, Dropper, Chain Hook, Scalpels, Magnifier Lense.	Velcro	1024



Buy Now!



SS
202


Pipettes

Glassco volumetric pipettes are manufactured in compliance with **DIN ISO 648** standards. These pipettes are calibrated to deliver (TD, EX) + 27° C .

All volumetric pipettes are calibrated by automatic machine and then the final quality check is done on the quality control centre. The volumetric pipettes come in **Class "A"** with individual work certificate which is printed in amber colour which fuses into the glass .

Each pipette is accompanied with a individual certificate in the pack you can also download the certificate from our website : www.glasscolabs.com and by scanning the QR Code from the label of the box.

Below is the over view of the one mark pipette explaining in detail the content printed on it.

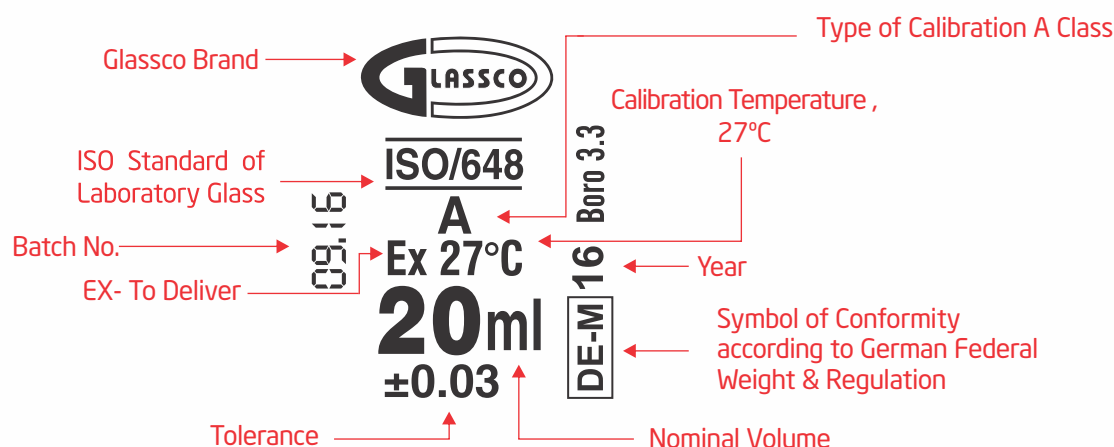

Pipette, Volumetric, 1 mark

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- with Individual Certificate, Class A, in compliance with DIN ISO 648 Standard

Item Code	Capacity (ml)	Tolerance (± ml)	Colour Code	Pack of	Price / Piece
123.523.00	0.5	0.005	2 BLACK	5	508
123.523.01	1	0.008	BLUE	5	403
123.523.02	2	0.010	ORANGE	5	409
123.523.02A*	3	0.010	BLACK	5	453
123.523.02B*	4	0.010	2 RED	5	453
123.523.03	5	0.015	WHITE	5	453
123.523.03A*	6	0.010	2 ORANGE	5	546
123.523.03B*	7	0.010	2 GREEN	5	546
123.523.03C*	8	0.020	BLUE	5	546
123.523.03D*	9	0.020	BLACK	5	546
123.523.04	10	0.020	RED	5	546
123.523.04A*	15	0.030	GREEN	5	615
123.523.05	20	0.030	YELLOW	5	713
123.523.06	25	0.030	BLUE	5	757
123.523.07	50	0.050	RED	5	858
123.523.08	100	0.080	YELLOW	5	1306

* Non DIN



Buy Now!



Pipette, Volumetric, Class A, 1 mark

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Complies with **DIN ISO 648 Standard**
- **NABL** Certified
- Comes with Individual Certificate
- Printed in Amber colour

Item Code	Capacity (ml)	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
123.505.01	1	0.008	BLUE	5	897
123.505.02	2	0.010	ORANGE	5	903
123.505.02A*	3	0.010	BLACK	5	934
123.505.02B*	4	0.010	2 RED	5	934
123.505.03	5	0.015	WHITE	5	972
123.505.03A*	6	0.01	2 ORANGE	5	1166
123.505.03B*	7	0.01	2 GREEN	5	1166
123.505.03C*	8	0.020	BLUE	5	1166
123.505.03D*	9	0.020	BLACK	5	1166
123.505.04	10	0.020	RED	5	1182
123.505.04A*	15	0.030	GREEN	5	1347
123.505.05	20	0.030	YELLOW	5	1419
123.505.06	25	0.030	BLUE	5	1530
123.505.07	50	0.050	RED	5	1839
123.505.08	100	0.080	YELLOW	5	2590

* Non DIN



Pipette, Volumetric, Class A, 1 mark

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Complies with USP standard
- Comes with Individual Works Certificate

Item Code	Capacity (ml)	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
123.520.01	1	0.006	BLUE	5	418
123.520.01A	1.5	0.006	-	5	470
123.520.02	2	0.006	ORANGE	5	475
123.520.02AB	2.5	0.006	-	5	530
123.520.02A	3	0.010	BLACK	5	496
123.520.02B	4	0.010	2 RED	5	496
123.520.03	5	0.010	WHITE	5	498
123.520.03A	6	0.010	2 ORANGE	5	553
123.520.03B	7	0.010	2 GREEN	5	553
123.520.03C	8	0.020	BLUE	5	553
123.520.03D	9	0.020	BLACK	5	553
123.520.04	10	0.020	RED	5	567
123.520.04E	15	0.030	GREEN	5	647
123.520.05	20	0.030	YELLOW	5	742
123.520.06	25	0.030	BLUE	5	793
123.520.06E	30	0.030	BLACK	5	795
123.520.06F	40	0.030	WHITE	5	845
123.520.07	50	0.050	RED	5	916
123.520.08	100	0.080	YELLOW	5	1382



Pipettes

Pipette, Volumetric, Class B, 1 mark

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass



Buy Now!

GLASS
BORO
3.3

AMBER
PRINTING

Chemical
Resistant

CLASS
B

Item Code	Capacity (ml)	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
122.522.01	1	0.015	BLUE	5	201
122.522.02	2	0.020	ORANGE	5	210
122.522.02A	3	0.020	BLACK	5	210
122.522.02B	4	0.020	2 RED	5	210
122.522.03	5	0.030	WHITE	5	222
122.522.03A	6	0.030	2 ORANGE	5	240
122.522.03B	7	0.020	2 GREEN	5	240
122.522.03C	8	0.020	BLUE	5	240
122.522.03D	9	0.040	BLACK	5	240
122.522.04	10	0.040	RED	5	258
122.522.04A	15	0.060	GREEN	5	292
122.522.05	20	0.060	YELLOW	5	298
122.522.06	25	0.060	BLUE	5	311
122.522.06A	30	0.06	BLACK	5	306
122.522.06B	40	0.10	WHITE	5	332
122.522.07	50	0.10	RED	5	366
122.522.08	100	0.15	YELLOW	5	521

Glassco Graduated Pipettes now comes in Type 1 (Mohr) and Type 3 (Serological).

- Type 1 : These pipettes are for partial delivery having 0 point at top.
- Type 3 : These pipettes are for complete delivery having 0 Point at top.

All are manufactured to meet ISO 835 Standards. These pipettes are calibrated to deliver (TD, EX) + 27° C. All graduated pipettes are calibrated by automatic machine and then the final quality check is done on the quality control centre. The graduated pipettes come in A class individual work certificate & are printed in amber colour. Each pipette is accompanied with individual certificate in the pack. You can also download the certificate at www.glasscolabs.com.



Buy Now!

AMBER
PRINTING

Chemical
Resistant

CLASS
A

Pipette, Graduated, Class-A

- Complies with **DIN ISO 835**
- Comes with **INDIVIDUAL** Work Certificate
- Serological Type 3

Item Code	Capacity (ml)	Sub Division	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
125.523.00	0.1	0.01	0.006	WHITE	5	643
125.523.00A	0.2	0.01	0.006	BLACK	5	643
125.523.01	1	0.01	0.007	YELLOW	5	616
125.523.01A	1	0.10	0.007	RED	5	529
125.523.02	2	0.02	0.010	BLACK	5	591
125.523.02A	2	0.10	0.01	GREEN	5	550
125.523.03	5	0.05	0.030	RED	5	683
125.523.03A	5	0.10	0.03	BLUE	5	643
125.523.04	10	0.10	0.050	ORANGE	5	736
125.523.06	25	0.10	0.100	WHITE	5	870

Pipette, Graduated, Class-A

- Complies with **DIN ISO 835**
- **NABL** Certified
- Comes with **INDIVIDUAL** Work Certificate
- Serological Type 3

Item Code	Capacity (ml)	Sub Division	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
125.505.00	0.1	0.01	0.006	WHITE	5	1256
125.505.00A	0.2	0.01	0.006	BLACK	5	1256
125.505.01	1	0.01	0.007	YELLOW	5	1355
125.505.01A	1	0.10	0.007	RED	5	1206
125.505.02	2	0.02	0.010	BLACK	5	1282
125.505.02A	2	0.10	0.01	GREEN	5	1212
125.505.03	5	0.05	0.03	RED	5	1370
125.505.03A	5	0.10	0.03	BLUE	5	1280
125.505.04	10	0.10	0.050	ORANGE	5	1502
125.505.06	25	0.10	0.100	WHITE	5	1848



Pipette, Graduated, Class-A

- Complies with **USP Standards**
- Comes with **INDIVIDUAL** Work Certificate
- Serological Type 3

Item Code	Capacity (ml)	Sub Division	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
125.220.00	0.1	0.01	0.010	WHITE	5	755
125.220.00A	0.2	0.01	0.010	BLACK	5	755
125.220.01	1	0.01	0.010	YELLOW	5	577
125.220.02	2	0.02	0.010	BLACK	5	571
125.220.03	5	0.05	0.020	RED	5	682
125.220.04	10	0.10	0.030	ORANGE	5	746
125.220.06	25	0.10	0.050	WHITE	5	886



Pipettes

Pipettes, Graduated, Class-B

- Printed in amber colour enamel.
- Serological Type 3



Buy Now!

Item Code	Cap. (ml)	Sub Division	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
124.522.00	0.1	0.01	0.01	WHITE	5	210
124.522.00A	0.2	0.01	0.01	BLACK	5	200
124.522.01	1	0.01	0.01	YELLOW	5	200
124.522.01A	1	0.10	0.01	RED	5	185
124.522.02	2	0.02	0.02	BLACK	5	210
124.522.02A	2	0.10	0.02	GREEN	5	200
124.522.03	5	0.05	0.05	RED	5	225
124.522.03A	5	0.10	0.05	BLUE	5	210
124.522.04	10	0.10	0.1	ORANGE	5	245
124.522.06	25	0.10	0.2	WHITE	5	385



Pipettes, Graduated, Class-A, Type 1 (Mohr)

- Complies with DIN ISO 835 Standard
- With Individual Works Certificate



Buy Now!

Item Code	Cap. (ml)	Sub Division	Tolerance ($\pm$ ml)	Colour Code	Pack of	Price / Piece
125.516.00	0.1	0.01	0.006	WHITE	5	643
125.516.00A	0.2	0.01	0.006	BLACK	5	643
125.516.01	1	0.01	0.007	YELLOW	5	605
125.516.01A	1	0.10	0.007	RED	5	529
125.516.02	2	0.02	0.010	BLACK	5	591
125.516.02A	2	0.10	0.010	GREEN	5	550
125.516.03	5	0.05	0.030	RED	5	683
125.516.03A	5	0.10	0.030	BLUE	5	643
125.516.04	10	0.10	0.050	ORANGE	5	736
125.516.06	25	0.10	0.100	WHITE	5	870



Pipettes, Graduated, Class-A, Type 1 (Mohr)

- Complies with **DIN ISO 835 Standard**
- **NABL** Certified
- With Individual Works Certificate

Item Code	Cap. (ml)	Sub Division	Tolerance (± ml)	Colour Code	Pack of	Price / Piece
125.506.00	0.1	0.01	0.006	WHITE	5	1256
125.506.00A	0.2	0.01	0.006	BLACK	5	1256
125.506.01	1	0.01	0.007	YELLOW	5	1355
125.506.01A	1	0.10	0.007	RED	5	1206
125.506.02	2	0.02	0.010	BLACK	5	1282
125.506.02A	2	0.10	0.010	GREEN	5	1212
125.506.03	5	0.05	0.030	RED	5	1370
125.506.03A	5	0.10	0.030	BLUE	5	1280
125.506.04	10	0.10	0.050	ORANGE	5	1502
125.506.06	25	0.10	0.100	WHITE	5	1848

NABL
CERTIFICATE



Buy Now!



Pipettes, Graduated, Class-B, (Mohr)

- Complies with **DIN/ISO 835**

Item Code	Cap. (ml)	Sub Division	Tolerance (± ml)	Colour Code	Pack of	Price / Piece
124.517.00	0.1	0.01	0.01	WHITE	5	210
124.517.00A	0.2	0.01	0.01	BLACK	5	202
124.517.01	1	0.01	0.01	YELLOW	5	200
124.517.01A	1	0.10	0.01	RED	5	188
124.517.02	2	0.02	0.02	BLACK	5	210
124.517.02A	2	0.10	0.02	GREEN	5	200
124.517.03	5	0.05	0.05	RED	5	225
124.517.03A	5	0.10	0.05	BLUE	5	212
124.517.04	10	0.10	0.10	ORANGE	5	245
124.517.06	25	0.10	0.20	WHITE	5	383



Buy Now!



Pipettes



GLASS
BORO
3.3



Pipettes, Gerber, Milk

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Complies with IS 1223
- Used for testing milk by the Gerber method.
- Are one-mark transfer Pipettes for measuring 10.75 ml
- Also be used in rural Milk Collection Centres



Buy Now!

Item Code	Cap. (ml)	Tolerance (± ml)	Pack of	Price /Piece
123.507.04	10.75	0.03	10	238

Pipettes, Gerber, Milk With Certificate

New

- With Calibration Certificate

Item Code	Cap. (ml)	Tolerance (± ml)	Pack of	Price /Piece
123.508.04	10.75	0.015	10	490



GLASS
BORO
3.3



Pipettes, Bacteriological, Graduated

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Complies with IS 2025
- Used for the bacteriological examination of milk
- 1.1 ml is graduated at 0.5, 1.0 & 1.1 ml
- 2.2 ml is graduated at 1.0, 2.0, 2.1 and 2.2 ml



Buy Now!

Item Code	Cap. (ml)	Tolerance (± ml)	Pack of	Price /Piece
125.507.01	1.1	0.025	10	230
125.507.02	2.2	0.04	10	255

Pipette Box

- Made of polypropylene
- Can hold Pipettes of different lengths
- Top of the box screws on the bottom and the height can be adjusted by screwing the top

Item Code	Type	Pack of	Price / Pack
171.303.01	Pipette Box	4	952



Buy Now!



Pipette Pump

- Made of ABS
- precise pipetting & zip quick emptying
- Knurled thumbwheel can be rotated to draw up or dispense liquids while the releaser may be pushed in for zip-quick emptying
- Moulded chuck has a silicon rubber collet inside to hold various pipettes of standard sizes
- resists acids & alkalies and can be easily disassembled for thorough cleaning

Item Code	Type	Pack of	Price / Pack
104.303.01	2	12	7768
104.303.02	10	12	7768
104.303.03	15	12	8474



Buy Now!



Pipettes

Pipette, Bulb

- Made of natural rubber
- Comes in natural or silicon
- It allows safe, manual control of filling or discharging toxic liquids through a pipette by finger pressure (thus avoiding mouth contact).

Natural Rubber :

Item Code	Size	Capacity ml	Pack of	Price / Piece
411.303.01	Small	5	10	40
411.303.02	Medium	10	10	46
411.303.03	Large	15	10	51
411.303.03A	Extra Large	20	10	55
411.303.04	Oval	25	10	85
411.303.05	Super Large	50	10	128
411.303.06	Extra Super Large	100	10	187



Buy Now!

Silicon Rubber :

Item Code	Size	Capacity ml	Pack of	Price / Piece
411.303.07	Small	5	10	90
411.303.08	Medium	10	10	110
411.303.09	Large	15	10	130
411.303.10	Extra Large	20	10	145
411.303.11	Oval	25	10	280
411.303.12	Super Large	50	10	680
411.303.13	Extra Super Large	100	10	750



Buy Now!



Pipette Filler

- With release valve allow adjustment of liquid
- Capacity 50 ml

Item Code	Type	Pack of	Price / Piece
415.303.01	Red colour, made of natural rubber	4	225
415.303.02	Blue colour, made of silicon rubber	4	518



Buy Now!



Pipette Stand (Horizontal)

- Made of Polypropylene
- Detachable stand can hold 12 pipettes, 6 on each side, in a horizontal position
- Autoclavable stand has two sides which are attached to each other with three metallic rods coated with Polypropylene
- Easy disassembling for space saving storage

Item Code	Capacity	Pack of	Price / Pack
168.303.01	for 12 Pipettes	6	931



Buy Now!



Pipette Stand (94 Pipettes- Rotary)

- Made of Polypropylene
- Holds maximum 94 pipettes and rotates on a central vertical axis for convenient selection of any pipette
- Lower rotating disc has four concentric troughs with tapered sides and open bottom which cradle the pipette tips protectively and permit water drops to run off
- Upper disc has a grid pattern concentric with the bottom disc and keeps the pipettes vertical.
- Liquids draining off the pipettes are retained on the top of the stationary base by the outer ring
- Easy disassembling & reassembling

Item Code	Capacity	Pack of	Price / Piece
170.303.01	for 94 Pipettes	1	637



Buy Now!





Pipette Controller

- Can fill 25 ml pipette under 4 seconds
- Safety valve and hydrophobic filters provide double protection against fluid penetration
- Two different speed modes - High & Low along with Gravity drain
- The pump speed can also be fine-tuned by varying finger pressure on operating knobs for better control of speed
- Cadmium free environment friendly NiMH batteries
- Batteries can be changed very easily by the user
- The intelligent charger prevents over charging/heating of batteries
- Low battery indicator
- The specially designed Desktop Stand enables the Pipette Controller to be charged while resting on it
- The Pipette Controller can hold the serological pipette while resting on Desktop Stand

Technical Data

Power	:	2x 1.2 V / 1000 mAh NiMH batteries
Battery Service Life	:	Eight hours continuous use
Battery Charging Time	:	2 - 3 hours to charge fully
Volumetric Range	:	Plastic or Glass pipette from 0.1 ml up to 200 ml
Safety System	:	Replaceable hydrophobic 0.45 µm PTFE filter Safety check valve
Standard Accessory	:	Battery charger (UK plug) Desktop Stand Hydrophobic PTFE membrane filter 0.45 µm 1Pc Hydrophobic PTFE membrane filter 0.20 µm 1Pc Wall mounting stand with screw

Ordering Information

Item Code	Capacity	Pack of	Price / Piece
501.404.01	Pipette Controller - Blue with desktop stand	1	13980



Buy Now!



Pasteur Pipette

Glassco Pasteur pipettes are manufactured to conform strict specifications laid down by research and industrial laboratories and are suitable for various laboratory applications.

Common salient features

- Made up of Borosilicate Glass
- Facilitate Controlled Drop
- Smooth, Straight-cut, Fire-polished tips (Short & Long Tip)
- Ideal for Clinical & Industrial use
- Disposable
- Supplied in Convenient Packing



Biosafety



Light Weight



Water Saving



Less Manpower



Time Saving



Low Cost



Use & Throw



Environment Friendly

Glassco Pasteur Pipettes with Cotton Plugs

- Compliance with ASTM E-732 standards

Item Code	Product Description	Overall Length	Pieces/Case	Price / Case
24672.400	Boro Glass 7.0 Expansion	14.6 cm	1000	3675
24672.405	Boro Glass 7.0 Expansion	22.9 cm	1000	4015
24672.410	Borosilicate Glass (3.3)	14.6 cm	1000	4510
24672.412	Borosilicate Glass (3.3)	22.9 cm	1000	4730



Buy Now!



Glassco Disposable Pasteur Pipettes

- Compliance with ASTM E-732 standards

Item Code	Product Description	Overall Length	Pieces/Case	Price / Case
24672.200	Boro Glass 7.0 Expansion	14.6 cm	1000	3355
24672.608	Boro Glass 7.0 Expansion with Controlled Drop**	14.6 cm	1000	3465
24672.380	Boro Glass 7.0 Expansion	22.9 cm	1000	3575
24673.010	Borosilicate Glass (3.3) Pipette - Short Tip (2 ml)	14.6 cm	1000	3960
23283.916	Boro (3.3) Pipette - Short Tip, Controlled Drop (2 ml)	14.6 cm	1000	4070
24673.043	Boro (3.3) Pipette - Long Tip (2 ml)	22.9 cm	1000	4180



Buy Now!



****Pipette body O.D. : 7 mm. | Capillary stem O.D. : Approx. 1.5mm, Delivers 22 to 28 Drops per ml**

Quartzware

Glassco Boron free Transparent silica Quartzware are manufactured as per IS/BS Standards.

- Low expansion with high thermal shock resistance with excellent dimensional stability.
- Glassco Quartzware shows no visible surface change in prolonged exposure gases, ozone, water, nitrogen oxide and other contaminants



QUARTZ GLASS

Chemical Resistant

WHITE PRINTING

Durable




Buy Now!

Coefficient of Linear Expansion 0°C to 800°C	5.5 x 10 ⁻⁷ cm/°c
Strains Point	1120°C
Annealing Point	1200°C
Softening Point	1685°C
Electrical Conductivity (at 350°C)	7x10 ⁷ ohm cm

Beakers, Low Form, With Spout

- Accurate in dimension
- Durable

Cat. No.	Cap. (ml)	Dia. (mm)	Height (mm)	Pcs/Pack	Price / Piece
Q230.235.01	25	34	50	5	1711
Q230.235.02	50	42	60	5	2527
Q230.235.03	100	50	70	5	3882
Q230.235.04	150	60	80	5	5142
Q230.235.05	250	70	95	1	7678
Q230.235.06	500	83	118	1	14253
Q230.235.07	1000	105	145	1	25020

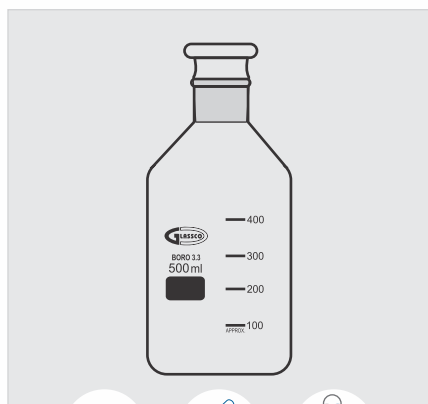

QUARTZ GLASS

Chemical Resistant

WHITE PRINTING




Buy Now!

Bottle, Reagent

- With hollow stopper

Cat. No.	Capacity (ml)	Pcs/Pack	Price / Piece
Q272.512.03	500	1	22218

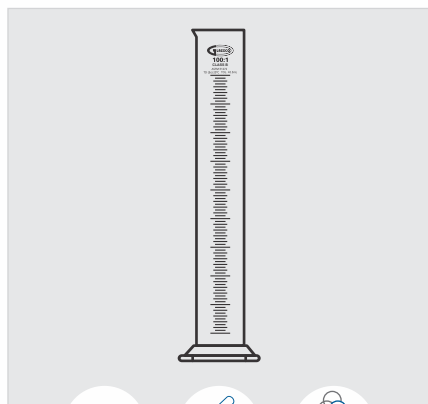

QUARTZ GLASS

Chemical Resistant

WHITE PRINTING



Buy Now!

Cylinder, Measuring, Class B

- With spout

Cat. No.	Capacity (ml)	Pcs/Pack	Price / Piece
Q138.510.00	5	1	8892
Q138.510.01	10	1	10050
Q138.510.03	50	1	20007
Q138.510.04	100	1	27905
Q138.510.05	250	1	39897
Q138.510.06	500	1	54967

Dishes / Basins, Round

- With Spout

Cat. No.	O.D. (mm)	Height (mm)	Pcs/Pack	Price /Piece
Q247.202.01	55	23	10	1455
Q247.202.02	75	27	5	4194
Q247.202.03	85	35	5	5324
Q247.202.04	95	36	1	8780
Q247.202.05	100	38	1	10614
Q247.202.06	115	47	1	15543



Buy Now!



QUARTZ GLASS



Erlenmeyer Flasks

Cat. No.	Cap. (ml)	Dia. (mm)	Height (mm)	Pcs/Pack	Price / Piece
Q233.202.01	50	50	90	1	6903
Q233.202.02	100	64	105	1	8003
Q233.202.03	150	72	124	1	9653
Q233.202.04	250	85	140	1	11989
Q233.202.05	500	100	180	1	21821



Buy Now!



QUARTZ GLASS



Flask, Volumetric

- Accurate Dimension
- Durable

Cat. No.	Cap. (ml)	N/S	Pcs/Pack	Price /Piece
Q131.220.01	5	10/19	1	6558
Q131.220.02	10	10/19	1	3803
Q131.220.03	25	10/19	1	4487
Q131.220.04	50	12/21	1	5405
Q131.220.05	100	14/23	1	6973
Q131.220.06	250	14/23	1	10185
Q131.220.07	500	19/26	1	12917
Q131.220.08	1000	24/29	1	26887



Buy Now!



QUARTZ GLASS






Buy Now!

Funnel


Cat. No.	Size (mm)	Pcs/Pack	Price /Piece
Q239.202.01	35	1	6084
Q239.202.02	45	1	7956
Q239.202.03	55	1	9828
Q239.202.04	70	1	12929
Q239.202.05	75	1	19925

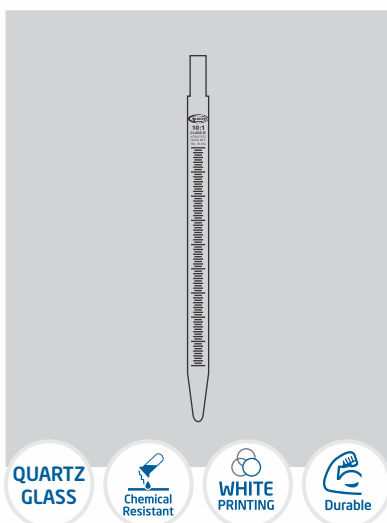

Buy Now!

Pipette, Measuring, Mohr type

Cat. No.	Cap. (ml)	Pcs/Pack	Price /Piece
Q125.530.01	1 x 0.01	1	11386
Q125.530.02A	2 x 0.1	1	7732
Q125.530.03A	5 x 0.1	1	9980
Q125.530.04	10 x 0.1	1	11949

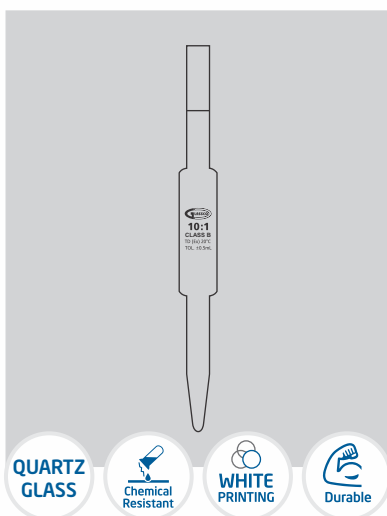

Buy Now!

Pipette, Transfer, Volumetric, Class B

Cat. No.	Cap. (ml)	Pcs/Pack	Price /Piece
Q122.540.01	1	1	8728
Q122.540.02	2	1	8728
Q122.540.02A	3	1	11312
Q122.540.02B	4	1	11312
Q122.540.03	5	1	11131
Q122.540.03A	6	1	12524
Q122.540.04	10	1	12860

Tube, Safety Burner

- Use with Bunsen Burners
- Available in Natural and Neoprene Rubber
- Tube has reinforced ends for better grip

Natural Rubber :

Item Code	Length (mm)	ID x OD (mm)	Pack of	Price /Piece
406.BB.01	450	8 x 14	1	91
406.BB.02	600	8 x 14	1	123
406.BB.03	900	8 x 14	1	166
406.BB.04	1000	8 x 14	1	187



Buy Now!



Neoprene Rubber :

Item Code	Length (mm)	ID x OD (mm)	Pack of	Price /Piece
426.BB.01	450	5 x 8	1	102
426.BB.02	600	5 x 8	1	128
426.BB.03	900	5 x 8	1	182
426.BB.04	1000	5 x 8	1	193



Buy Now!



Cork, Rubber Neoprene, Working temp. are 50 to 120°C

- Easy distinguishable blue color for lab use
- Flame resistant & Autoclavable
- Tolerates weathering & ozone
- Has excellent low gas permissibility

Item Code	Cork No.	Top (±2 mm)	Bottom (±2 mm)	Height (±2 mm)	Pack of	Price / Pack
420.303.01	5		5.0		10	139
420.303.02	6	9.0	6.0	16.0	10	155
420.303.03	8	10.5	8.0	20.0	10	171
420.303.04	9	11.5	9.0	20.0	10	182
420.303.05	10	12.5	10.0	20.0	10	203
420.303.06	11	14.0	11.0	24.0	10	273
420.303.07	13	16.0	13.0	24.0	10	342
420.303.08	15	18.0	15.0	24.0	10	407
420.303.09	17	20.5	17.0	26.0	10	508
420.303.10	18	21.0	18.0	26.0	10	572
420.303.11	19	22.5	19.0	28.0	10	653
420.303.12	21	24.5	21.0	28.0	10	733
420.303.13	23	26.5	23.0	28.0	10	840
420.303.14	25	28.5	25.0	28.0	10	872
420.303.15	27	31.0	27.0	32.0	10	1054
420.303.16	29	31.0	29.0	32.0	10	1268
420.303.17	31	36.0	31.0	35.0	10	1632
420.303.18	33	38.5	33.0	38.5	10	2038
420.303.19	35	45.5	35.0	36.5	10	2461
420.303.20	38	42.5	38.0	40.5	10	2852
420.303.21	40	49.5	40.0	40.5	10	2852



Buy Now!



Cork, Rubber

- Made of RSS-S grade rubber
- More pure rubber than regular stopper and has clear incineration & biodegradable property
- Permissible temp. upto 80°C & Shore Hardness 45



Buy Now!



Item Code	Cork No.	Top (± 2 mm)	Bottom (± 2 mm)	Height (± 2 mm)	Pack of	Price /Pack
410.303.01	000	9	6	16	10	32
410.303.02	0	13	9	15.5	10	37
410.303.03	1	14	11	18.5	10	43
410.303.04	2	16.5	13	20	10	54
410.303.05	3	19	14	21	10	59
410.303.06	4	21	15	22	10	64
410.303.07	5	22.5	17.5	23	10	80
410.303.08	6	24.5	20	24	10	107
410.303.09	7	26	20	27.5	10	118
410.303.10	8	26.5	21	27.5	10	139
410.303.11	9	28	21.5	31	10	177
410.303.12	10	30	26	33	10	209
410.303.13	11	33	29	32	10	241
410.303.14	12	34.5	30	34.5	10	262
410.303.15	13	38.5	31	37	10	348
410.303.16	14	41.5	32	42.5	10	391
410.303.17	15	42	38	40.5	10	503
410.303.18	16	45	35	36.5	10	508
410.303.19	17	49.5	40	40.5	10	599
410.303.20	18	53.5	48	33.5	10	674
410.303.21	19	58	44	45	10	781
410.303.22	20	60	51	56.5	10	1113

Cork, Rubber (Euro Design) DIN 12871



Buy Now!

EU

Item Code	Top (± 2 mm)	Bottom (± 2 mm)	Height (± 2 mm)	Pack of	Price /Pack
410.303.23	6.5	3.5	15	10	32
410.303.24	9	5	20	10	32
410.303.25	12	8	20	10	37
410.303.26	14.5	10.5	20	10	43
410.303.27	16.5	12.5	20	10	54
410.303.28	18	14	20	10	70
410.303.29	22	17	25	10	80
410.303.30	24	18	30	10	96
410.303.31	27	21	30	10	161
410.303.32	29	23	30	10	177
410.303.33	32	26	30	10	214
410.303.34	35	29	30	10	219
410.303.35	38	31	35	10	337
410.303.36	44	36	40	10	444
410.303.37	49	41	40	10	535
410.303.38	55	47	40	10	621
410.303.39	59.5	50.5	45	10	717
410.303.40	65	56	45	10	1284
410.303.41	70	60	50	10	1616
410.303.42	75.5	64.5	55	10	1915
410.303.43	83	71	60	10	1985
410.303.44	92	79	65	10	2065
410.303.45	100	87	65	10	2317
410.303.46	107	94	65	10	2573

Cork, Silicon

- Made of high quality food grade FDA approved silicone, translucent
- Non reactive & very useful for organic chemistry use
- Resistant to high pressure, vacuum, Steam sterilization & UV sterilization
- Working temp. are 50 to 250°C
- Shore Hardness 45A

Item Code	Cork No.	Top (± 2 mm)	Bottom (± 2 mm)	Height (± 2 mm)	Pack of	Price / Pack
405.303.01	9	11.5	9	20	10	293
405.303.02	11	14	11	24	10	461
405.303.03	13	16	13	24	10	587
405.303.04	15	18	15	24	10	679
405.303.05	17	20	17	26	10	840
405.303.06	18	21	18	26	10	909
405.303.07	19	22.5	19	28	10	1058
405.303.08	23	25.5	23	28	10	1346
405.303.09	25	28.5	25	28	10	1610
405.303.10	27	31	27	32	10	1944
405.303.11	29	33	29	32	10	2484
405.303.12	31	36	31	35	10	2956
405.303.13	33	38.5	33	38.5	10	3778



Buy Now!



Cork, Silicon, Euro design


- Complies with DIN 12871 Standards

Item Code	Top (± 2 mm)	Bottom (± 2 mm)	Height (± 2 mm)	Pack of	Price / Pack
405.303.14	6.5	3.5	15	10	138
405.303.15	9	5	20	10	167
405.303.16	12	8	20	10	213
405.303.17	14.5	10.5	20	10	322
405.303.18	16.5	12.5	20	10	391
405.303.19	18	14	20	10	408
405.303.20	22	17	25	10	719
405.303.21	24	18	30	10	794
405.303.22	27	21	30	10	926
405.303.23	29	23	30	10	1162
405.303.25	35	29	30	10	2168
405.303.26	38	31	35	10	2622
405.303.27	44	36	40	10	3490
405.303.28	49	41	40	10	4014
405.303.29	55	47	40	10	4813
405.303.30	59.5	50.5	45	10	5284
405.303.31	65	56	45	10	6147
405.303.32	70	60	50	10	9626
405.303.33	75.5	64.5	55	10	12075
405.303.34	83	71	60	10	15416
405.303.35	92	79	65	10	19953
405.303.36	100	87	65	10	26669
405.303.37	107	94	65	10	28940



Buy Now!



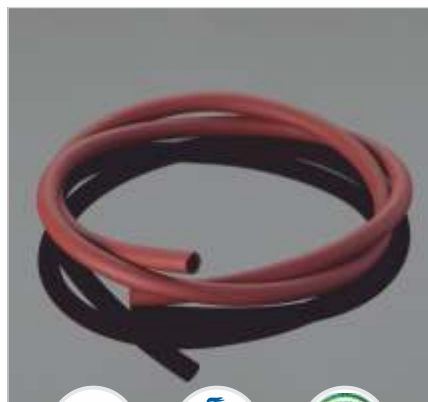


Buy Now!

Tubing, Natural Rubber

- Tubing is suitable for laboratory, pharmaceutical, industrial and educational purposes
- Comes in Red colour
- Tolerance $\pm 0.2\text{MM}$
- Made of RSS-3 grade rubber
- Has incineration & biodegradable property
- Permissible temp. -20°C to $+70^\circ\text{C}$

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
406.303.01	4.0	1.0	6	10 Mtr.	268
406.303.02	5.0	1.5	8	10 Mtr.	364
406.303.03	6.0	1.5	9	10 Mtr.	428
406.303.04	7.0	1.5	10	10 Mtr.	524
406.303.05	8.0	1.5	11	10 Mtr.	599
406.303.06	9.0	2.0	13	10 Mtr.	744
406.303.07	10.0	2.0	14	10 Mtr.	819
406.303.08	12.0	2.0	16	10 Mtr.	1059

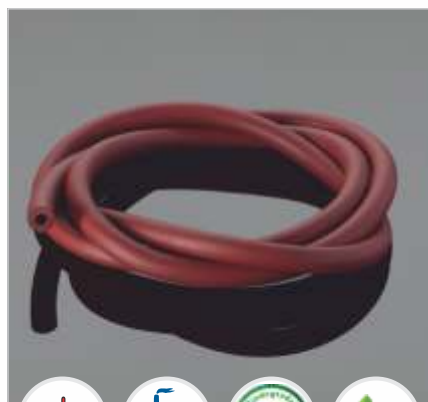

Buy Now!

Tubing, Pressure Rubber

- Suitable for laboratory, pharmaceutical, industrial and educational purposes
- Made of Natural Rubber
- Resistant to light acids, light alkalis
- Tolerance $\pm 0.2\text{MM}$
- Shore Hardness 50-55A
- Permissible temp. -20°C to $+70^\circ\text{C}$

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
408.303.01	3.0	3.0	9	10 Mtr.	444
408.303.02	5.0	3.0	11	10 Mtr.	546
408.303.03	6.0	3.0	12	10 Mtr.	658
408.303.04	8.0	3.0	14	10 Mtr.	786
408.303.05	9.0	3.0	15	10 Mtr.	888
408.303.06	10.0	4.0	18	10 Mtr.	1305
408.303.07	12.0	4.0	20	10 Mtr.	1707

Tubing, High Pressure Rubber

- Suitable for laboratory, pharmaceutical, industrial and educational purposes
- Made of Natural Rubber
- Resistant to light acids, light alkalis
- Tolerance $\pm 0.2\text{MM}$
- Shore Hardness 50-55A
- Permissible temp. -20°C to $+70^{\circ}\text{C}$

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
409.303.01	3.0	5.0	13	10 Mtr.	733
409.303.02	5.0	5.0	15	10 Mtr.	877
409.303.03	6.0	5.0	16	10 Mtr.	1011
409.303.04	8.0	5.0	18	10 Mtr.	1263
409.303.05	9.0	5.0	19	10 Mtr.	1343
409.303.07	10.0	6.0	22	10 Mtr.	2070
409.303.06	12.5	6.5	24	10 Mtr.	1942



Buy Now!



Tubing Pressure Green :

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
401.303.01	6.4	3.2	12.8	10 Mtr.	1300



Buy Now!



Tubing, Blood Pressure Green Superior :

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
403.303.01	3	2.5	8	10 Mtr.	792



Buy Now!



Tubing, Silicon Rubber

- Complies with USP VI standards & USP CFR 177 2600 Complaint
- Made of high quality food grade
- Non reactive & very useful for organic chemistry use
- Resistant to high pressure, vacuums, Steam sterilization & UV sterilization
- Working temp. are -50 to 250°C
- Shore Hardness 45A



Buy Now!

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
400.303.01	2	1	4		750
400.303.02	3	1	5		790
400.303.03	3	1.5	6		1250
400.303.04	4	1	6		1250
400.303.05	4	1.5	7		1450
400.303.06	5	1	7		1900
400.303.07	5	1.5	8		1900
400.303.08	6	1	8		2200
400.303.09	6	1.5	9		3200
400.303.10	6	2	10		3400
400.303.11	6	3	12		5900
400.303.12	7	1.5	10		3100
400.303.13	7	2	11		3900
400.303.14	8	1.5	11		3150
400.303.15	8	2	12		3800
400.303.16	8	3	14		5457
400.303.17	9	2	13		4514
400.303.18	10	2	14		5457
400.303.19	10	3	16		6500
400.303.20	12	3.5	19		8809
400.303.22	14	3	20		9550
400.303.23	15	4	23		15805
400.303.24	16	3	22		13127

Tubing, Silicon Platinum Cured



Buy Now!

Item Code	Inner dia (mm)	Wall Thickness (mm)	Outer dia (mm)	Pack of	Price / Pack
400.350.03	3.0	1.5	6	1 Mtr.	185
400.350.05	4.0	1.5	7	1 Mtr.	203
400.350.07	5.0	1.5	8	1 Mtr.	272
400.350.09	6.0	1.5	9	1 Mtr.	306
400.350.10	6.0	2.0	10	1 Mtr.	341
400.350.12	7.0	1.5	10	1 Mtr.	341
400.350.13	7.0	2.0	11	1 Mtr.	392
400.350.14	8.0	1.5	11	1 Mtr.	392
400.350.15	8.0	2.0	12	1 Mtr.	404
400.350.17	9.0	2.0	13	1 Mtr.	599
400.350.18	10.0	2.0	14	1 Mtr.	806
400.350.20	12.0	2.0	16	1 Mtr..	824

Tubing, Vacuum

- Made of pure natural rubber.
- Used for high pressure applications
- Available in per meter
- Walls does not collapse at high pressure applications

Item Code	ID x OD (mm)	Pack of	Price /Pack
407.303.01	6 x 19	1 Mtr.	872
407.303.02	8 x 22	1 Mtr.	942



Buy Now!



Teats

- Used in laboratory with droppers for dispensing drops or qualitative amounts of liquids or chemicals.

Item Code	Type	Rubber Type	Capacity	Pack of	Price / Pack
414.303.01	Conical	Natural Rubber	1	10	492
414.303.02	Conical	Natural Rubber	2-3	10	1354
414.303.03	Round	Natural Rubber	1	10	492
414.303.04	Conical	Silicon Rubber	1	10	2168
414.303.05	Conical	Silicon Rubber	2-3	10	2714
561.505.01	Round	Latex Rubber	Small	10	710
561.505.02	Round	Latex Rubber	Large	10	1190




Buy Now!



Available in **pack of 10** only

Available in **Pack of 10 Meter Coil** only

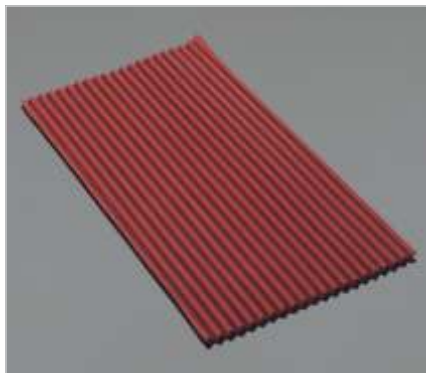


Buy Now!

Sheet, Rubber Corrugated

- Used in Industrial Shelves, Hospital and Medical Buildings

Item Code	Dimension (mm)	Pack of	Price /Piece
402.303.01	350 x 150	4	112


Minimum order quantity : **5 Meter coil**

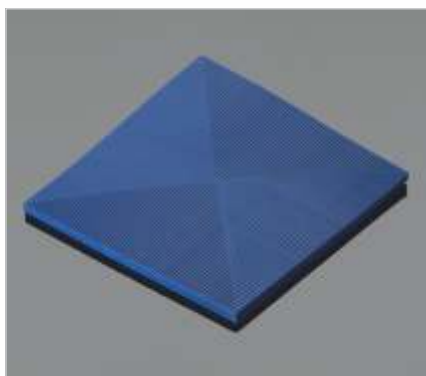

Buy Now!

Mat, Laboratory

Item Code	Dimension (mm)	Rubber Type	Pack of	Price /Piece
402.400.01	12" x 12"	Natural Rubber	4	2065
402.400.02	12" x 12"	Silicone Rubber	4	3042

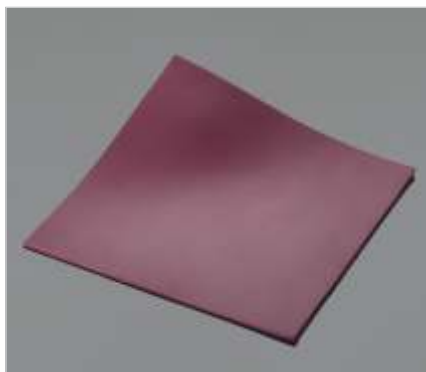

Buy Now!

Sheet, Laboratory

- Used to avoid direct surface Contact of glassware products on the solid surface.

Item Code	Dimension (mm)	Rubber Type	Pack of	Price /Piece
402.500.01	9.5" x 9.5" x 2.7	Natural Rubber	4	171
402.500.02	9.5" x 9.5" x 2.7	Silicone Rubber	4	1478

Test Tube, Re-usable

- Complies to **EN ISO 4142**
- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Without Rim
- Uniform wall Thickness
- Excellent heat transfer

Item Code	Cap. (ml)	O.D. x Height (mm)	Thickness (mm)	Pack of	Price /Piece
097.202.01	3	10 x 75	1.0	100	9
097.202.02	5	12 x 75	1.0	100	9
097.202.03	6	12 x 100	1.0	100	14
097.202.04*	13	15 x 125	1.2	100	18
097.202.04A	10	16 x 100	1.2	100	21
097.202.04B	20	16 x 150	1.2	100	25
097.203.05*	15	15 x 150	1.2	100	21
097.202.05	27	18 x 150	1.2	100	22
097.203.06	45	20 x 150	1.2	100	28
097.211.07A*	38	25 x 100	1.2	100	28
097.202.06*	55	25 x 150	1.2	100	34
097.202.07*	60	25 x 200	1.2	100	45
097.211.10A*	100	32 x 200	1.4	50	68
097.211.12*	150	38 x 200	1.4	50	82

* Non DIN/ISO



Buy Now!



Test Tube, Re-usable

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- With Rim EN ISO-4142
- Uniform wall Thickness
- Excellent heat transfer


Item Code	Cap. (ml)	O.D. x Height (mm)	Thickness (mm)	Pack of	Price / Piece
097.215.01	3	10 x 75	1.0	100	9
097.215.02	5	12 x 75	1.0	100	9
097.215.03	7	12 x 100	1.0	100	14
097.215.04*	13	15 x 125	1.2	100	18
097.215.04A*	15	15 x 150	1.2	100	21
097.215.06	27	18 x 150	1.2	100	22
097.215.07	45	20 x 150	1.2	100	28
097.215.08*	38	25 x 100	1.2	100	28
097.215.08A*	55	25 x 150	1.2	100	34
097.215.08B*	70	25 x 200	1.2	100	45
097.215.12*	100	32 x 200	1.4	50	68
097.215.14*	150	38 x 200	1.4	50	82

* Non DIN/ISO



Buy Now!



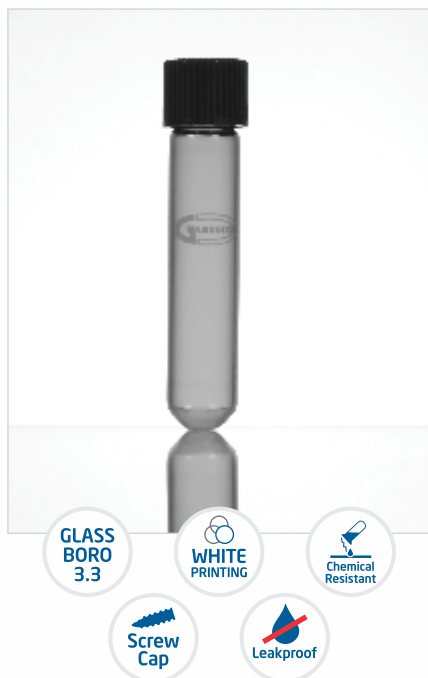

Buy Now!

Tubes Culture Round Bottom, Reusable

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- With Screw Thread and Teflon Liner
- Leakproof
- Comes with PP Screw Cap

Item Code	O.D. x Length (mm)	Bottom Type	Capacity ml	Pack of	Price / Piece
082.204.01	12 x 100	Round	5	100	44
082.204.02B	16 x 75	Round	5	100	73
082.204.02	16 x 100	Round	10	100	67
082.204.03	16 x 125	Round	15	100	77
082.204.04	16 x 160	Round	20	100	84
082.204.05	18 x 180	Round	30	100	87
082.204.06	20 x 100	Round	15	100	87
082.204.07	20 x 200	Round	40	100	90
082.204.08	22 x 200	Round	45	100	94
082.202.05	25 x 100	Round	30	100	93
082.202.06	25 x 150	Round	50	100	98
082.202.07	25 x 200	Round	60	100	98
082.204.13	38 x 200	Round	150	50	351



Buy Now!

Tubes, Amber Culture Media, Round Bottom, Reusable

- The uniform Amber colour is highly durable and chemical resistance
- Leakproof
- Comes with PP Screw Cap & PTFE Liner

Item Code	Capacity ml	O.D. x Length (mm)	Bottom Type	Pack of	Price / Piece
082.279.05	5	16 x 75	Round	100	124
082.279.05A	10	16 x 125	Round	100	165
082.279.10	30	25 x 100	Round	100	180
082.279.10A	60	25 x 200	Round	100	235
082.279.13	150	38 x 200	Round	50	1052

PS: Test Tubes in other sizes can be provided on request

Tubes, Culture Media, Flat Bottom

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Printed in matt finish white colour enamel
- Comes with PP Screw Cap & PTFE Liner
- Uniform wall Thickness

Item Code	Capacity ml	O.D. x Length (mm)	Bottom Type	Pack of	Price / Piece
083.204.02C	5	16 x 50	Flat	100	67
083.202.01	5	18 x 45	Flat	100	60
083.202.02A	10	25 x 50	Flat	100	82
083.202.02AB	15	25 x 57	Flat	100	82
083.202.02B	20	25 x 72	Flat	100	87
083.202.03	30	25 x 95	Flat	100	93
083.202.04	40	25 x 145	Flat	100	98



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Screw
Cap

Tubes, Amber Culture Media, Flat Bottom

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- The uniform Amber colour is highly durable and chemical resistance
- Comes with PP Screw Cap & PTFE Liner

Item Code	Capacity ml	O.D. x Length (mm)	Bottom Type	Pack of	Price / Piece
083.279.01	5	16 x 50	Flat	100	124
083.279.01A	5	18 x 45	Flat	100	124
083.279.02	10	25 x 50	Flat	100	170
083.279.03	15	25 x 57	Flat	100	170
083.279.04	20	25 x 72	Flat	100	200
083.279.06	30	25 x 95	Flat	100	210
083.279.06A	40	25 x 145	Flat	100	229



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

Screw
Cap

PS: Test Tubes in other sizes can be provided on request

Closure Cap for Test Tubes

- Made of Polypropylene



Buy Now!

Item Code	Size for Tube (mm)	Pack of	Price /Piece
100.202.01	12	100	12
100.202.02	15	100	12
100.202.03	18	100	14
100.202.04	20	100	18
100.202.05	25	100	19



Disposable Glassware Culture Tube - Boro Glass 5.1

Glassco Disposable Culture Tubes are resistant to chemical attack and weathering.

Salient Features:

- Boro Glass 5.1 Expansion offers excellent chemically resistance
- High heat tolerance
- Uniform dimensions
- Convenient dispensing packages

Manufactured from Type-I, Class B borosilicate glass, each tube is heat-treated at temp. exceeding 500°C (932°F) immediately before packing, which eliminates contamination, increases strength, and reduces breakage. Tubes features well-rounded bottoms and fire polished tops free of rough edges. Dimensional specifications of these tubes are rigidly controlled for reliable, uniform results.

Tubes are clean-sealed in a convenient dispensing package to keep them free from dust and other particulate contamination.

Tube (O.D. 6 x 50 mm) is also known as a **Durham Tube**.

Contents will not leach out and contaminate solutions. Borosilicate glass construction prevents pH change in laboratory tests.



Biosafety



Light Weight



Water Saving



Less Manpower



Time Saving



Low Cost



Use & Throw



Environment Friendly

Item Code	O.D. x Height (mm)	Over Flow Volume (ml)	Pieces/Case	Price / Case
27729.566	6 x 50	0.75	2000	6403
27729.568	10 x 75	3	1000	3296
27729.570	12 x 75	5	1000	3642
27729.572	13 x 100	9	1000	4283
27729.574	15 x 85	10	1000	4659
27729.576	16 x 100	14	1000	5506
27729.578	16 x 125	18	1000	6837
27729.580	16 x 150	22	1000	7817
27729.583	18 x 150	28	500	5324
27729.584	20 x 150	34	500	6171
27729.586	25 x 150	60	500	7623



Buy Now!



GLASS BORO 5.1

WHITE PRINTING

Chemical Resistant

Disposable Glassware Culture Tube - Boro Glass 7.0

These tubes are chemically clean and well-suited for general use in chemistry, blood banks, hematology and other laboratory procedures.

Salient Features:

- Fire-polished top
- Shrink-film sealed to prevent contamination
- Well-rounded bottoms

Each tube is annealed at temperatures over 426.7°C (800°F) to increase strength and reduce breakage. Tubes feature smooth, well-rounded bottoms with no irregularities. Tops are fire-polished to eliminate rough edges. Tubes are packed in lint-free packaging and are shrink-film sealed to prevent any contamination from outside sources.

Item Code	O.D. x Height (mm)	Over Flow Volume (ml)	Pieces/Case	Price / Case
20825.402	10 x 75	3	1000	2662
20825.406	12 x 75	5	1000	2766
20825.414	13 x 100	9	1000	3048
20825.425	16 x 100	11	1000	4061
20825.430	16 x 125	15	1000	5130
20825.435	16 x 150	20	1000	5767
20825.443	18 x 150	28	500	4002
20825.447	20 x 150	34	500	4708



Buy Now!



GLASS BORO 7.0

WHITE PRINTING


Chemical Resistant

Disposable Glassware Culture Tube with Screw Cap Finish - Boro Glass 5.1

Tubes have a marking spot and reference mark for orientation during use and a threaded neck to accept screw cap.

Salient Features :

- Borosilicate glass 5.1 expansion construction
- Marking spot and orientation reference mark on all tubes

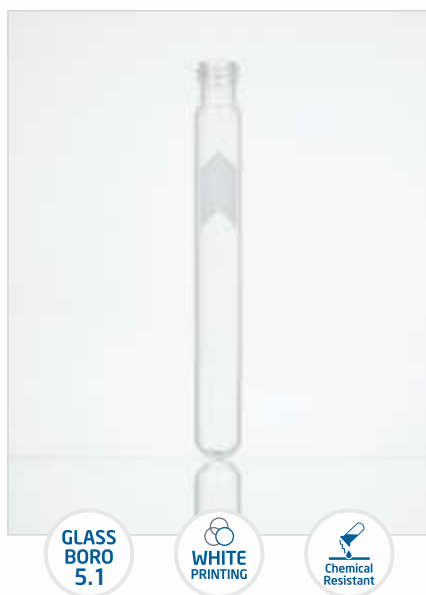

Buy Now!

Item Code	O.D. x Height (mm)	Thread Finish	Over Flow Volume (ml)	Pieces/ Case	Price / Case
23283.800	13 x 100	13-415	8	1000	10890
23283.802	16 x 100	15-415	12	1000	12947
23283.804	16 x 125	15-415	16	1000	14124
23283.806	16 x 150	15-415	20	1000	16243
23283.685	20 x 125	18-415	30	500	7792
23283.686	20 x 150	18-415	33	500	9181



Buy Now!

Phenolic Caps, With Rubber Liner

Item Code	O.D. x Height (mm)	Thread Finish	Pieces/ Case	Price / Case
23283.800C	13 x 100	13-415	1000	8239
23283.804C	16 x 125	15-415	1000	8828
23283.685C	20 x 125	18-415	1000	9416

Test Tube

- With Interchangeable Penny Head Glass Stopper

Item Code	Height x O.D. (mm)	Stopper Size	Pack of	Price / Piece
096.502.01	100 x 12	10/19	100	211
096.502.02	125 x 15	12/21	100	231
096.502.03	150 x 18	14/23	100	252
096.502.04	150 x 25	19/26	100	306
096.502.05	200 x 25	19/26	100	367
096.502.06	200 x 32	24/29	50	503
096.502.07	200 x 38	24/29	50	575



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

HOLLOW

Test Tube

- With joint & Penny Head Glass stopper
- With Graduation

Item Code	Height x O.D. (mm)	Stopper Size	Capacity ml	Pack of	Price / Piece
095.502.00	100 x 12	10/19	5	100	244
095.502.03A	125 x 16	12/21	10	100	260
095.502.03B	150 x 18	14/23	20	100	272
095.502.03C	150 x 22	19/26	25	100	299
095.502.04A	150 x 25	19/26	30	100	320
095.502.04	200 x 25	19/26	50	100	333
095.502.05B	200 x 32	24/29	100	50	510
095.502.07	200 x 38	24/29	150	50	598



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

HOLLOW



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Tube, COD Digestion Tube, With Stopper

- Made from thick walled, mechanically very resistance borosilicate glass
- Used in COD Disintegration
- Printed in White colour enamel

Item Code	O.D. x Length (mm)	N/S	Pack of	Price /Piece
091.202.15	36 x 205	29/32	10	548
091.202.17	39 x 205	29/32	10	548



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant



Buy Now!

Test Tube, Flat Bottom, Without Rim

- Made of borosilicate glass, designed with a flat bottom
- High thermal shock resistance
- Designed without a rim
- Used for pathological tests and disintegration apparatus

Item Code	O.D. x Length (mm)	Cap. (ml)	Pack of	Price /Piece
093.202.02	12 x 75	5	100	26
093.202.06A	18 x 138	22	100	56
093.202.06C	18 x 55	26	100	40
093.202.03A	13 x 110	10	100	47
093.202.07	18 x 100	18	100	52

Test Tube, Flat Bottom, Without Rim

- Made of borosilicate glass, designed with a flat bottom
- High thermal shock resistance
- Designed without a rim
- Used for pathological tests and disintegration apparatus

Item Code	O.D. x Length (mm)	Cap. (ml)	Pack of	Price /Piece
093.502.06B	14 x 110	5	100	46
093.502.05	16 x 96	22	100	50
093.502.06	18 x 55	26	100	41
093.502.07	18 x 100	10	100	52
093.502.09	18 x 138	18	100	56

Tube, Reaction

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass

Item Code	Capacity (ml)	Socket	Pack of	Price /Piece
047.202.06	25	14/20	1	634



Buy Now!

**Brush, Test Tube**

Item Code	Type	Material	Pack of	Price /Piece
593.303.02	Test Tube Brush	Nylon	50	111



Buy Now!






Test Tube Baskets

- Made of Polypropylene
- Are autoclavable and non-corrosive
- Ideal for rinsing & draining glassware
- Useful for storage of test tubes or culture tubes during sterilization or incubation



Buy Now!

Item Code	Size	Pack of	Price /Pack
167.303.01	140 x 120 x 110	6	674
167.303.02	160 x 160 x 160	6	899
167.303.03	400 x 400 x 100	6	2868

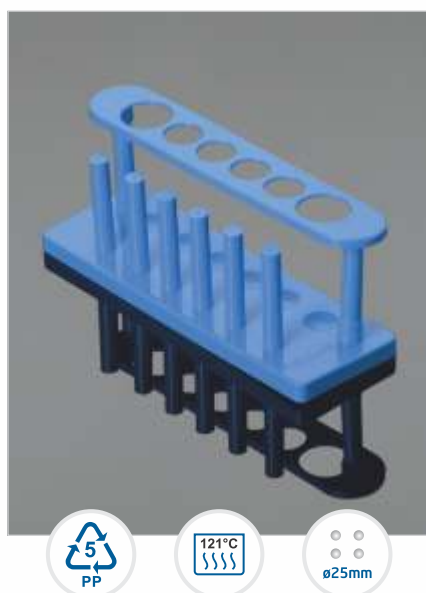

Test Tube Stand

this autoclavable stand is perhaps the most commonly used Test Tube Stand in various laboratories. For better visibility, this 6 place rack is end supported by 2 columns. The top plate has 2 holes for holding 25 mm dia test tubes, four holes to hold 16 mm dia tubes where as the base has corresponding hemispherical wells. It also has six vertical pins for drying tubes.

Material : Polypropylene



Buy Now!

Item Code	Size	Pack of	Price /Pack
161.303.02	25 mm. Tubes	12	795

Test Tube Stand (3 TIER)

- Made of Polypropylene
- Ingenious racks with 3-Tier design provide clear view of the tube contents
- Convenient inserting & removal of tubes
- Every part of rack is coloured & opaque
- Are autoclavable and withstand sub-freezing temperatures

Item Code	Size/Capacity	Pack of	Price /Pack
163.303.01	13 mm x 31 Tubes	2	326
163.303.02	16 mm x 31 Tubes	2	326
163.303.03	20 mm x 20 Tubes	2	439
163.303.04	25 mm x 12 Tubes	2	326
163.303.05	25 mm x 18 Tubes	2	439
163.303.06	32 mm x 12 Tubes	2	514
163.303.07	25 mm x 36 Tubes	2	813
163.303.08	13 mm x 18 Tubes	4	417
163.303.09	15 mm x 18 Tubes	4	417
163.303.10	18 mm x 12 Tubes	4	417
163.303.11	13 mm x 62 Tubes	2	567
163.303.12	16 mm x 62 Tubes	2	567
163.303.13	20 mm x 40 Tubes	2	813
163.303.14	13 mm x 48 Tubes	2	449
163.303.15	13 mm x 72 Tubes	2	514



Buy Now!






Buy Now!

Test Tube Stand (3 TIER)

- Made of Polycarbonate
- Ingenious racks with 3-Tier design provide clear view of the tube contents
- Convenient inserting & removal of tubes
- Every part of rack is coloured & opaque
- Are autoclavable and withstand sub-freezing temperatures
- Has transparent upper & middle plates where plates

Item Code	Size/Capacity	Pack of	Price /Pack
164.303.01	13 mm x 31 Tubes	2	803
164.303.02	16 mm x 31 Tubes	2	803
164.303.03	20 mm x 20 Tubes	2	899
164.303.04	25 mm x 12 Tubes	2	803
164.303.05	13 mm x 62 Tubes	2	1648
164.303.06	16 mm x 62 Tubes	2	1648
164.303.07	20 mm x 40 Tubes	2	1830
164.303.08	25 mm x 24 Tubes	2	1648
164.303.09	25 mm x 18 Tubes	2	910
164.303.10	25 mm x 36 Tubes	2	1840
164.303.11	32 mm x 12 Tubes	2	1412

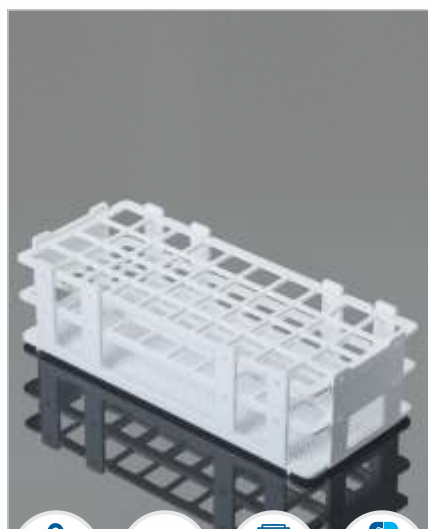

Buy Now!

Test Tube Stand (Wire Pattern)

- Made of Polypropylene
- Economical substitute for wire racks
- Are autoclavable and stackable when empty
- Available in different colours and are made of a special blend of Polypropylene that makes it sink in a water bath and maintain their stability even in agitated water
- Easily disassembling for cleaning purpose
- base is in the form of a grid with square openings and has fold up sides and end bars that lock in to rack tops

Item Code	Size/Capacity	Pack of	Price /Pack
166.303.01	13 mm. x 90 Tubes	6	1091
166.303.02	16 mm. x 60 Tubes	6	1091
166.303.03	20 mm. x 40 Tubes	6	1091
166.303.04	25 mm. x 24 Tubes	6	1091
166.303.05	30 mm. x 21 Tubes	6	1091

Manufactured from ASTM E-438, Type-1, CLASS-A, BORO 3.3 GLASS. These tubes come with uniform wall thickness for maximum heat transfer and chemical resistance

Centrifuge Tubes, Conical Bottom Graduated

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Uniform wall Thickness
- Strudy Lip

Item Code	Capacity (ml)	Height x O.D. (mm)	Pack of	Price / Piece
088.202.01	5	100 x 13	100	84
088.202.02	10	110 x 15	100	88
088.202.03	15	120 x 17	100	175
088.202.04	25	125 x 22	100	222
088.202.05	50	125 x 29	50	346
088.202.06	50	140 x 29	20	346



Buy Now!



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

10
20
30

Centrifuge Tubes, Conical Bottom Graduated, With Screw Cap

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Uniform wall Thickness
- With Screw Cap

New

Item Code	Capacity (ml)	O.D. x Height (mm)	Pack of	Price / Piece
088.505.03	15	17 x 130	100	646
088.505.04	50	29 x 150	50	851

Centrifuge Tubes, Conical Bottom

- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Uniform wall Thickness
- Strudy Lip

Item Code	Capacity (ml)	Height x O.D. (mm)	Pack of	Price / Piece
089.202.02	5	100 x 13	100	63
089.202.03	10	110 x 15	100	66
089.202.05	15	120 x 17	100	87
089.202.06	25	125 x 22	100	206
089.202.07	50	125 x 29	50	271



Buy Now!



GLASS
BORO
3.3

WHITE
PRINTING

Chemical
Resistant

10
20
30



GLASS
BORO
3.3

BLUE
PRINTING

Chemical
Resistant

10
20
30
40
50
60
70
80
90
100



Buy Now!

Tube, Centrifuge

- Round Bottom Graduated
- Made from ASTM E-438 Type-1 Class A, Boro 3.3 glass
- Printed in Blue colour

Item Code	Capacity (ml)	Height x O.D. (mm)	Pack of	Price /Piece
094.202.01	12	16 x 110	100	136
094.202.02	30	24 x 110	100	172
094.202.03	40	28 x 110	50	198
094.202.04	50	30 x 110	50	211
094.202.05	100	45 x 110	50	297
094.202.07	200	55 x 116	50	436



5
PP

Easy to
Load

EASY
IDENTIFY



Buy Now!

Float Rack

- Made of Polypropylene
- Autoclavable and can hold 16 micro centrifuge tubes for incubation in water baths
- Easy to load
- Essential in microbiology & immunology labs.
- Sur face of the rack has raised alpha - numeric index for easy identification and has a ventral rod handle for convenient lif ting.

Item Code	Capacity (ml)	Pack of	Price /Pack
131.303.01	16 MCT'S of 1.5 ml.	12	2311

Centrifuge Tube Conical Bottom

- Made of Polypropylene
- Are Clear Strong & Safe
- Are autoclavable and both printed graduation
- Leakproof
- Can withstand forces upto 7500 x G 15ml & 1200 x G for 50 ml

Item Code	Capacity (ml)	Pack of	Price /Pack
135.303.01	15	100	950
135.303.02	50	100	1120
135.303.03	15 Sterile	100	948
135.303.04	50 Sterile	100	1410



Buy Now!



Tube, Centrifuge, Round Bottom

- Made of Polypropylene & Polycarbonate
- Are strong enough to be used upto 50,000xG
- Autoclavable

Item Code	Capacity (ml)	Pack of	Price /Pack
136.303.01	16 ml. Tube PP.	50	2454
136.303.02	50 ml. Tube PP.	50	6352
136.303.03	16 ml. Tube PC.	50	4731
136.303.04	50 ml. Tube PC.	50	7010



Buy Now!





Buy Now!

OAK Ridge Centrifuge Tubes

- Made of Polypropylene
- Can be used upto 50,000xG
- Screw cap is fitted with silicone O-ring making it totally leakproof
- Should not be used below 4°C

Item Code	Capacity (ml)	Pack of	Price /Pack
137.303.01	30	12	622
137.303.02	50	12	1196
137.303.03	100	12	1592



Buy Now!

Centrifuge Tubes Box

- Made of Polypropylene
- These boxes provide substitute for conventional cardboard or foam rack
- These boxes are autoclavable & can withstand Temperature ranging from -90°C to +120°C

Item Code	Capacity (ml)	Pack of	Price /Pack
165.305.03	30	4	1255
165.305.05	50	4	1255

Tube, Micro Centrifuge

- Made of Polypropylene
- Built in plugs make these tubes leakproof
- Used for transmitting sample for micro analysis

Item Code	Capacity (ml)	Pack of	Price /Pack
130.303.01	0.5	1000	880
130.303.02	1.5	1000	972



Buy Now!



Rack For Micro Centrifuge Tube

- Made of Polycarbonate
- Autoclavable
- Made for holding twenty four 1.5 ml. micro centrifuge tubes
- Unique stacking feature prevents movement in any direction
- Holes are numbered & lettered for easy identification

Item Code	Quantity	Pack of	Price /Pack
165.303.03	100 Tubes	2	417



Buy Now!





Buy Now!

29 GU Organic Chemistry Set

- This set is ideal for introducing student to the principal techniques of preparative organic chemistry.
- Although the set is very simple a surprising number of preparations on the 30 g scale can be carried out.

Item Code	Description	Price /Piece
202.202.01	Complete set comprising 5 items of Glassware	2200

Item Code	Components	29 BU/M
1	Pear shaped flask 50 ml	1
2	Still head	1
3	Liebig condenser	1
4	Screw Cap adapter	1
5	Receiver adapter	1

27 GU Organic Chemistry Set

- A highly popular set in schools, colleges and universities.
- It has been purposely designed to cover the essential requirements for the teaching of organic chemistry and is suitable for preparations up to 30g.
- This is a set which is difficult to beat for versatility.



Buy Now!

Item Code	Description	Price /Piece
203.202.01	Complete set comprising 9 items of Glassware	3000

Item Code	Components	27 BU/M
1	Pear shaped flask 50 ml	1
2	Still head	1
3	Liebig condenser	1
4	Screw Cap adapter	1
5	Receiver adapter	1
6	Air leak/steam inlet tube	1
7	Dropping funnel, 50 ml with PTFE Needle Valve Stopcock	1
8	Stopper	1
9	Thermometer	1

34 GU Organic Chemistry Set

- For student use in preparation organic chemistry up to the 1501 g scale, this includes all the necessary equipment to allow a wide range of preparation to be carried out
- IT is also invaluable for industrial laboratories where the amount of preparative work is not great and may occur at infrequent intervals
- For such applications, this set has the advantage of covering an extensive field of work and occupying little space when not in use

Item Code	Description	Price /Piece
207.202.01	Complete set comprising 16 items of Glassware	6000



Buy Now!

Item Code	Components	Socket Size	Cone Size
1	Still head	14/23	19/26
2	Receiver	19/26	24/29
3	Air leak/steam inlet tube	-	19/26
4	Liebig condenser	19/26	19/26
5	Dropping funnel, 100 ml	19/26	19/26
6	Reducing adapter	19/26	24/29
7	Multiple adapter	19/26	24/29
8	Flask, R.B., 50ml	24/29	-
9	Flask, Erlenmeyer, 250 ml	24/29	-
10	Flask, R.B., 250ml	24/29	-
11	Stopper	-	19/26
12	Stopper	-	19/26
13	Thermometer Pocket	-	14/23
14	Receiver adapter	19/26	-
15	Flask, R.B., 10ml	24/29	-
16	Stopper	-	24/29





Buy Now!

Storage Vial

- Made of Polyethylene
- Used for storage of biological material, human & animal cells at temp. as low as -190°C
- Cap is provided with a built in seal ring making the vial leakproof
- Base of the vial has longitudinal grooves which give it a non-twisting character when placed in a vial rack

Item Code	Capacity (ml)	Pack of	Price /Pack
144.303.01	2.0	500	1580
144.303.02	5.0	500	2475



Buy Now!

Test Tube with Screw Cap

- Made from polypropylene
- Tubes provide excellent option for RIA, Coagulation & Bacteriology etc
- Available with screw cap

Item Code	Capacity (ml)	Pack of	Price /Pack
142.303.02	16x100mm Ext. Thread	500	4250



Buy Now!

Sv5 Vial

- Made of Polypropylene
- Have polypropylene cap with built in seal ring making it a leak proof vial
- Used for the storage of biological material, animal & human cells etc

Item Code	Capacity (ml)	Pack of	Price /Pack
147.303.02	SV - 5 ml	500	2675

Caps for 9mm - 2ml Screw Neck Vials

Screw / PTFE

Product Code	Colour	Cap MOC	Septa MOC	Septa Amount	Septa Mount/ Feature	Vial Pack	Vial Case Qty	Price Per Pack
086.205.02	Blue	PP	Silicone	Bonded	-	100	10x100	2050
086.206.02	Blue	PP	Silicone	Bonded	Pre-Slit	100	10x100	2050



Buy Now!

9mm - Clear Screw Neck Vials

Product Code	Volume ml	Vial Colour	Write on Patch	Vial Dia mm	Vial Height	Vial Pack	Vial Case Qty	Price Per Pack
086.202.02	2	Clear	Yes	12	32	100	10x100	1550
086.508.02	2	Amber	Yes	12	32	100	10x100	2100



Buy Now!



Glass Vials with closures (COMBIPACK)

9mm Screw Top Clear Vials made from Borosilicate USP Type I 49-Expansion glass with Closure Blue PP Cap PTFE-Silicone Septa

Product Code	Volume ml	Vial Colour	Write on Patch	Vial Dia mm	Vial Height	Vial Pack	Vial Case Qty	Price Per Pack
086.502.02	2	Clear	Yes	12	32	100	10x100	2950
086.504.02	2	Amber	Yes	12	32	100	10x100	3500

TOC Vials, Clear Glass

- Borosilicate Glass Exp. 5.1
- With Bonded Cap & Silicone Septa having flip cover
- Tolerance : O.D. 27.50 +/- 0.20mm
- Wall Thickness 1.20mm +/- 0.05mm

Product Code	Capacity ml	O.D. x Height	Glass	Septa	Vial Pack of	Price Per Pack
083.205.02	20	28x57	Clear	Bonded	1x72	Price on Request
083.205.04	40	28x95	Clear	Bonded cap with flip cover	1x72	Price on Request
083.206.02	20	28x57	Amber	Bonded	1x72	Price on Request
083.206.04	40	28x95	Amber	Bonded cap with flip cover	1x72	Price on Request



Buy Now!



HEAD SPACE Vials

- Designed to use for High Pressure / Performance Liquid Chromatography (HPLC) and Gas Chromatography (GC) Applications.
- Crimp top vials consist of an Aluminum cap and PTFE / Silicon / Rubber Septum thus forms a superior seal and reduces evaporation.
- Optional with White Ceramic Writing Patch and fill marks for easy labelling.

Head Space Vials ND 20

Headspace vials with Crimp neck ND20 available with round or flat bottom are made of clear and amber Type 1 glass. The vials are available with a flat DIN crimp neck or with a bevelled neck (HS neck).

On the flat DIN crimp neck, liners have a greater contact surface, which ensures a better seal. A bevelled HS neck is required if the overpressure safety seal.



Code	Glass Color	Patch	Neck Type	D x H (mm)	Working Volume (ml)	Bottom Design	Finish	Special	Pack Unit
GW.HPVC20.01	Clear	-	ND20	22 X 38	5	Round	HS	-	100
GW.HPVC20.02	Clear	-	ND20	22 X 38	5	Flat	HS	-	100
GW.HPVC20.03	Clear	-	ND20	20 X 38	5	Flat	DIN	-	100
GW.HPVC20.04	Clear	-	ND20	22.5 X 46	10	Round	DIN	-	100
GW.HPVC20.05	Clear	-	ND20	22.5 X 46	10	Flat	DIN	Long Neck	100
GW.HPVC20.06	Clear	-	ND20	20 X 54.5	10	Flat	DIN	-	100
GW.HPVC20.07	Clear	-	ND20	22.5 X 75.5	20	Flat	DIN	Long Neck	100
GW.HPVC20.08	Clear	-	ND20	22.5 X 75.5	20	Round	DIN	Long Neck	100
GW.HPVC20.09	Clear	-	ND20	22.5 X 75.5	20	Round	HS	-	100
GW.HPVC20P10	Clear	Yes	ND20	22.5 X 75.5	20	Round	HS	-	100

Standard Caps for Head Space Vials ND 20

Code	Cap Color	Cap Design	Neck Type	Liner	Pack Unit
GW.V20.SC1	Silver	Open Top	ND20	Moulded Grey PTFE / Butyl	100
GW.V20.SC2	Silver	Open Top	Nd20	Moulded Grey PTFE (Pharma Fix) / Butyl	100

Magnetic Crimp Cap ND 20

Code	Cap Color	Cap Design	Neck Type	Liner	Pack Unit
GW.V20.GC1	Gold	Open Top	ND20	White PTFE/Blue Silicone Septa	100
GW.V20.GC2	Gold & Silver	Open Top	ND20	Natural PTFE/Natural Silicone Septa	100



Pressure Release Cap for Headspace Vials ND 20

Code	Cap Color	Cap Design	Neck Type	Liner	Pack Unit
GW.V20.SC5	Silver	Open Top	ND20	Moulded Grey PTFE/Butyl Septa	100



Rack for Scintillation Vial

Made from Polypropylene, are autoclavable & corrosion resistant. There is an individual rack for both 8 ml. & 20 ml. vials. These rugged & stable racks can hold scintillation vials for convenient storage, handling & sample preparations.

Item Code	Type	Pack of	Price /Pack
149.303.01	Rack for 90 vials of 8 ml	2	1708
149.303.02	Rack for 50 vials of 20 ml	2	1092



Buy Now!



Cryo Rack


- Made from Polycarbonate making it tough, durable & autoclavable
- Can hold 50 vials at a time
- This rack is provided with four anti skid rubbers & each well is identified with an alpha-numeric index

Item Code	Type	Pack of	Price /Pack
153.303.01	50 places for 1, 1.8 and 4.5 ml Cryo vials	2	877



Buy Now!



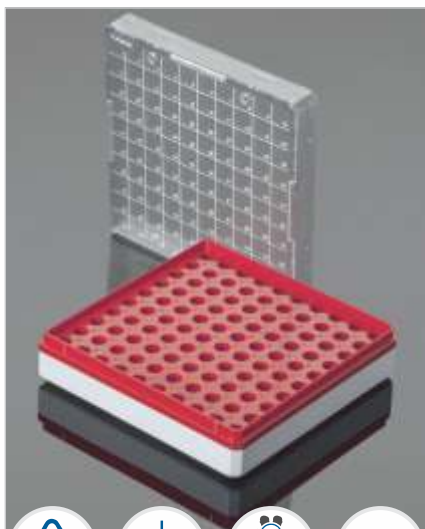

MCT Twin Rack

- Made from Polypropylene
- Twin Purpose Rack for both 0.5 ml & 1.5 ml. micro centrifuge tubes
- Each side has 108 holes for 0.5 & 1.5 ml. MCT'S, respectively
- Transparent top provides an excellent view as well as a protection cover for the tubes stored
- Each face of the base has a unique alpha-numeric index for easy identification of the tube



Buy Now!

Item Code	Capacity (ml)	Pack of	Price /Pack
133.303.01	Rack for 96 PCR Tubes of 0.2 ml	4 pc	1241



Cryo Box (Cardboard)

- Made from Polypropylene
- Used for storage and preservation of frozen samples
- These can withstand ultra low temperature in deep freezers and has removable top lid
- These can be used for upright freezers, drawers & chest freezers with dividers and are laminated.
- Material Polypropylene & Cardboard



Buy Now!

Item Code	Capacity (ml) Micro tubes & cryovials	Dim (LxWxH)	Material	Pack of	Price / Pack
155.303.01	81 places for 1ml & 1.8ml	132x132x50	PP	8	1470
155.303.02	100 places for 1ml & 1.8ml	132x132x50	PP	8	1470
155.303.03	81 places for 1.5ml & 2ml	132x132x50	Cardboard	8	1573
155.303.04	100 places for 1.5ml & 2ml	132x132x50	Cardboard	8	1305

Water Stills are carefully designed to produce high purity pyrogen free distilled water.

Unit consist of :

- Horizontal type boiler borosilicate glass
- Condenser
- Constant level device
- Silica sheathed (Quartz) heater
- With stand and clamp etc

Key Features :

- Borosilicate condenser and boiler are fitted with a removable silica sheathe (Quartz) heater.
- Distillate temperature is around 65 to 75°C which is ensured by an efficient condenser.
- The stand is powder coated for rust free operation and lustrous appearance.
- The unit automatically switches off if water level in the boiler falls below heater.
- Cooling water from the condenser is re-circulated into the boiling chamber, hence saving energy.
- Drain nozzle/Teflon stop cork is provided for easy cleaning and maintenance.
- The model is equipped with in-built temperature switch to protect the Glass parts in case of water failure or overheating.



Single stage, water distillation, all glass, horizontal model with inbuilt safety cutoff

Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLWS15SG	1.5	1	23430
GLWS25SG	2.5	1	36850
GLWS40SG	4	1	42460



Buy Now!

Spares for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLWS-SH-15BCS	1.5	Boiling Chamber with Leveller	1	6457
GLWS-SH-25BCS	2.5	Boiling Chamber with Leveller	1	9020
GLWS-SH-40BCS	4	Boiling Chamber with Leveller	1	15400
GLWS-SH-15BCC	1.5	Coil Condenser	1	5082
GLWS-SH-25BCC	2.5	Coil Condenser	1	9009
GLWS-SH-40BCC	4	Coil Condenser	1	13745
GLSI-SH-HS15	1.5	Silica Sheathed (Quartz) Heater	1	6347
GLSI-SH-HS25	2.5	Silica Sheathed (Quartz) Heater	1	8448
GLSI-SH-HS40	4	Silica Sheathed (Quartz) Heater	1	10934

Water Distillation

**Double Stage Water Distillation all Glass
Horizontal Model with inbuilt **safety cutoff****



Buy Now!



Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLWS15DG	1.5	1	42130
GLWS25DG	2.5	1	77660
GLWS40DG	4	1	86350

Spares for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLWS-SH-15BCS	1.5	Boiling Chamber with Leveller	1	6457
GLWS-SH-25BCS	2.5	Boiling Chamber with Leveller	1	9020
GLWS-SH-40BCS	4	Boiling Chamber with Leveller	1	15400
GLWS-SH-15BCC	1.5	Coil Condenser	1	5082
GLWS-SH-25BCC	2.5	Coil Condenser	1	9009
GLWS-SH-40BCC	4	Coil Condenser	1	13745
GLSI-SH-HS15	1.5	Silica Sheathed (Quartz) Heater	1	6347
GLSI-SH-HS25	2.5	Silica Sheathed (Quartz) Heater	1	8448
GLSI-SH-HS40	4	Silica Sheathed (Quartz) Heater	1	10934

Single Stage, Water Distillation, Quartz Boiler/Borosilicate Condenser, Vertical Model **without safety cutoff**

Unit consist of :

- High purity quartz with inbuilt heater
- Bottom discharge joint for easy cleaning
- Spiral condenser is fitted on the boiler with receiving adapter
- Optional safety control unit provided

Conductivity	1. 0-1.5 uS/cm with Borosilicate Condenser
	0.5-0.8 uS/cm with Quartz Condenser
Distilled Water Quality	Pyrogen Free
Distillate Temperature	50-60°C

* All Parameters are under standard test conditions

Advantages :

- Quartz can withstand very high temperature variation, thus it is thermal shock proof.
- Rust proof sturdy stand as base.

Key Features:

- Distillate is pyrogen free; also it is free of heavy metals.
- Low maintenance is required.
- Provides instant distilled water in less than one minute



Buy Now!



Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLSD25BB	2.5	1	38170
GLSD50BB	5	1	72160
GLSD80BB	8	1	124630
GLSD100BB	10	1	163130

Spares for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLSD-25-QBS	2.5	Quartz boiling chamber	1	51260
GLSD-50-QBS	5	Quartz boiling chamber	1	87029
GLSD-80-QBS	8	Quartz boiling chamber	1	103142
GLSD-100-QBS	10	Quartz boiling chamber	1	91649
GLSD-25-BCC	2.5	Borosilicate Coil Condenser	1	5174
GLSD-50-BCC	5	Borosilicate Coil Condenser	1	16909
GLSD-80-BCC	8	Borosilicate Coil Condenser	1	18480
GLSD-100-BCC	10	Borosilicate Coil Condenser	1	34910

Accessories for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLSI-SCU-1	2.5 & 5	Safety Cut-off Device	15710
GLSI-SCU-2	8 & 10	Safety Cut-off Device	28530

Water Distillation

Single Stage, Water Distillation, Quartz boiler & Quartz condenser, vertical model **without safety cutoff**



Buy Now!



Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLSD25AQ	2.5	1	63340
GLSD50AQ	5	1	123530
GLSD80AQ	8	1	188100

Spares for above models :

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLSD-25-QBS	2.5	Quartz Boiler	1	26565
GLSD-50-QBS	5	Quartz Boiler	1	51260
GLSD-80-QBS	8	Quartz Boiler	1	87029
GLSD-25-QCC	2.5	Quartz Coil Condenser	1	26565
GLSD-50-QCC	5	Quartz Coil Condenser	1	60522
GLSD-80-QCC	8	Quartz Coil Condenser	1	103142

Accessories for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLSI-SCU-1	2.5 & 5	Safety Cut-off Device	15710
GLSI-SCU-2	8 & 10	Safety Cut-off Device	28530



All Quartz, Double Stage, Water Distillation Unit, Vertical Model, including Safety cutoff

Unit has been designed keeping in view customer requirements and easy serviceability of the equipment.

Unit consists of :

- Lower boiler with inbuilt heater enclosed in a quartz boiler with a cup on top.
- Demountable upper boiler with built in quartz coil and condensing unit mounted on the boiler with the help of ball and socket joint
- Double walled condenser ensures separate condensation of vapours coming from the two boilers using a single cooling circuit
- Unit mounted on a specially designed metal stand and is also provided with automatic safety Control Unit.

Double Distillate Quality



Buy Now!

Parameters	Values
Specific Conductivity	0.1 us/cm
Biological Activity (distillate quality)	Pyrogen Free
Organic Matter	Nil
Total Solids	0.1 mg/ltr

* We recommend a Quartz Reservoir For storage of High purity water.

* All Parameters are under standard test conditions

Cat No.	Output Capacity Ltr / Hr	Pack Size	Price / Piece
GLDD15AQ	1.5	1	107635
GLDD25AQ	2.5	1	189200
GLDD40AQ	4	1	314875
GLDD50AQ	5	1	347600

Spares for above models :

Cat No. Size	Output Capacity Ltr / Hr	Description	Pack	Price / Piece
GLDD-15AQ-PB	1.5	Quartz Primary Boiler	1	26840
GLDD-25AQ-PB	2.5	Quartz Primary Boiler	1	33440
GLDD-40AQ-PB	4	Quartz Primary Boiler	1	52622
GLDD-50AQ-PB	5	Quartz Primary Boiler	1	53777
GLDD-15AQ-SC	1.5	Quartz Secondary Boiler	1	102520
GLDD-25AQ-SC	2.5	Quartz Secondary Boiler	1	145299
GLDD-40AQ-SC	4	Quartz Secondary Boiler	1	281243
GLDD-50AQ-SC	5	Quartz Secondary Boiler	1	288173
GLSI-SCU-15AQ	1.5	Safety Cut-off Device	1	16720
GLSI-SCU-25AQ	2.5	Safety Cut-off Device	1	16720
GLSI-SCU-40AQ	4	Safety Cut-off Device	1	28600
GLSI-SCU-50AQ	5	Safety Cut-off Device	1	28600

Advantages of Demountable Model :

- Easy cleaning of the first boiler since it can be dismantled from the assembly
- Ease of interchangeability as it is provided with ball & Socket joint
- Boiler and condenser have larger boiling space resulting in balanced boiling and improved quality of distillate Compact and easy to install
- Dual safety Power Cut-off System included in distillation unit price
- New Design of Safety Cut-off System with Dual Safety & Microprocessor Control
- New dual - safety cut off provides accurate values
- Microprocessor Controlled
- LCD Display
- Audible alarm for unsupervised operation

NOTE : ***pH electrodes will NOT give accurate pH values in distilled or de-ionized water. This is because distilled and de-ionized water do not have enough ions present for the electrode to function properly. The readings will drift and be essentially meaningless. In practice, however, most distilled water will have a pH that is slightly acidic (less than 7.0) due to the presence of carbon dioxide (CO_2) that is absorbed from the atmosphere. Dissolved carbon dioxide reacts slowly with water to give the bicarbonate and hydronium ions.

AUTOMATIC WATER DISTILLATION UNIT (CABINET STILL)



Key Features :

- Fully automatic water distillation equipment
- Can be used in research laboratories, hospitals etc
- Made from 3.3 exp borosilicate glass.
- Provides accurate values
- Microprocessor controlled
- LCD display
- Audible alarm for unsupervised operation
- Replaceable silica sheathed (Quartz) heater: fitted on horizontal jacket
- Distillate temperature is around 25 to 45°C ensured by an efficient condenser.
- Metal stand is painted for rust free operation and lustrous appearance.
- Cooling water from the condenser is re-circulated into the boiling chamber, hence saving energy.
- Fuse is provided for safety in case of voltage fluctuation or short circuit.
- Boiler is provided with Teflon screw cork for easy draining and cleaning of boiling chamber.
- The front cover is easily removable making the access to the glass parts very easy.
- Electrical Power: 220/240 V, 50/60Hz, Single Phase Supply.

Additional In-built Safety Features:

- Gate Valve: Conserves cooling water wastage in case of power failure.
- Flow Switch: Additional in-built safety feature for the equipment unit shut off in case of cooling water failure.
- Temperature switch: The boiler is equipped with a safety temperature switch which shuts off the unit if water level in the boiler falls below the heater, thus saving the glass parts from any damages.
- Level Sensor: It shuts off the distillation equipment if the water level in the boiler falls below the heater.
- Reservoir Level Sensor: this helps in automatic working of the water distillation equipment. Depending on the water level in the reservoir it will automatically switch On/Off the equipment, thus saving energy. (Reservoir can also be provided with a storage capacity of 5 ltr, 10 ltr & 20 ltr made of Borosilicate Glass or polypropylene)



Buy Now!

Single stage, automatic water distillation unit, cabinet still

Cat No.	Output Capacity Ltr / Hr	Stage	Pack Size	Price / Piece
GLCM20S	2	Single	1	68310
GLCM40S	4	Single	1	81565
GLCM20D	2	Double	1	105930
GLCM40D	4	Double	1	136840

Spares for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLCM-20BCS	2	Boiling Chamber with Leveller for GLCM-20S & GLCM-20D	1	15435
GLCM-40BCS	4	Boiling Chamber with Leveller for GLCM-40S & GLCM-40D	1	18711
GLCM-20BCC	2	Coil Condenser for GLCM-20S & GLCM-20D	1	15435
GLCM-40BCC	4	Coil Condenser for GLCM-40S & GLCM-40D	1	18711

Accessories for above Distillation unit

Cat No.	Output Capacity Ltr / Hr	Description	Pack Size	Price / Piece
GLSI-SH-HS	2	Silica Sheathed (Quartz) Heater for GLCM-20S, GLCM-40S, GLCM-20D & GLCM-40D	1	7854

WATER SOFTENER

Prominent feature :

- Softens the hard water and provides good quality water for use in laboratories.
- Remove all the calcium and magnesium ions in hard water and the soft water thus obtained liquid has hardness less than 5 ppm as CaCO_3 .
- Specially designed for easy serviceability and recharging the resin with sodium chloride solution.
- Softened water can be used as feed water to the Distillation Units.
- Use of hard water in boilers, would leave the boiler with a lot of scaling and sedimentation, hence to improve the quality of the distillate and for longer life of the glass/quartz boilers, it is recommended to use softened water.

Cat No.	Description	Pack Size	Price Per Piece
GI000200	Water Softener	1	31800



Buy Now!



TERMS & CONDITIONS

The following terms and conditions of sale and payment shall apply to all goods supplied by us unless specifically accepted by us in writing. Acceptance of goods supplied constitutes acceptance of these terms:

- Prices are in Indian Rupees. The Authorised Dealers are at liberty to charge lower than that stipulated here. These prices are exclusive of any delivery charges, octroi and other non-statutory levies.
- Prices are exclusive of GST which shall be extra as applicable on the date of Invoice.
- Prices are subject to change without notice. Prices applicable on the date of supply shall be valid.
- Invoices are to be paid immediately or as per the agreed credit terms.
- The price contains the standard quantities per pack for each item. It is desirable that orders are placed in multiples thereof.
- Every effort shall be made to maintain quoted delivery dates. However, due to the risks and nature of working with the glass, these dates are not in any way binding. Our contractual obligation to our customers is subject to correct and prompt deliveries from our suppliers.
- No goods should be returned to us without our prior approval.
- All information contained in this pricelist-cum-catalogue cannot be reproduced without our written consent.
- All legal relationship formed as a result of sales would be in accordance with the Indian Laws and Ambala Cantt shall be the place of jurisdiction for all parties and for all matters. If GLASSCO appears as a plaintiff, it will also be entitled to start legal proceedings at any such city / town where the customers are located

Additional Terms applicable to supply of Instruments only

- **Warranty :** The instruments supplied shall carry warrantee of one year from the date of invoice to the original purchaser against faulty workmanship and defect. Any part going defective will be replaced/ repaired free of cost. Few items like fuses, lamps, bulbs, heaters, etc. are not covered under warranty. Again damage resulting due to accident/misuse is not covered under warranty. Warranty conditions for different instruments may vary.
- **Freight Cost** will be additional to the quoted price.
- **IQ/PQ/OQ certifications** will be charge extra as per instrument category.
- **Installation :** All the instruments covered in this price list can be installed by the user with the help of instruction manual supplied with the equipment. In case Company's technical representative has to undertake the installation, charges will be extra and shall be quoted on case-to-case basis.
- **Delivery :** Will be effected Ex-Ambala Cantt within 4-6 weeks from the date of receipt of the order complete in all respect. Exact delivery period will be intimated in the order acknowledgement. For specially manufactured items, delivery period will be more than 6 weeks.
- During warranty period replacement of mechanical & electrical components if any will be done free of cost. However, component replacement if any, cause of wear and tear like rubber components, flexible hose, breakable glass components and consumables like membrane, crucible etc will not be covered under warranty.
- The warranty does not include damage created in the instrument/electronic/ heaters due to very high voltage spikes, lighting, surge voltage, etc which is out of scope of our control. Warranty does not cover damages created due to natural calamities like fire, flood etc.

INDEX

ADAPTERS

Page No.

Air Leak Tube/ Gas Inlet Tube	45
Bushing	21
Chromatography Reservoirs	36
Claisen Heads	32
Cone	36
Cone Screw Thread	46
Cone with Rubber Tubing	40
Cone with Stem, Inlet, Fritted	41
Distillation 105°	28
Drying Tube	44
Expansion	22
Flash Chromatography	36
Flushing	38
Inlet, Inlet/Thermometer	47
Multiple	22-23
Non-Serrated in Natural Rubber	48
Non-Serrated in Silicon Rubber	48
Plastic Hose Connection	49
Pocket Thermometer	45
Receiver	24-31
Recovery Bend	27,31
Reduction	21
Rotary Evaporator	35
Screw Thread	49
Serrated in Natural Rubber	48,49
Serrated in Silicon Rubber	48
Socket to cone	42
Stopcock Socket	39
Splash Heads	33-34
Steam Distillation Heads	34
Still Head Plain	32
Stopcock T-shape Cone	39
Swan Neck	24
Thermometer with Hose Connection	46
Tubing Straight	42
Turnover Flange Septa for Socket	49
Vacuum or Gas 90°	43
Vacuum/Argon(Nitrogen) Straight	40
Vacuum	38

Vacuum with ASTM Sizes,	37
Socket with Glass Stopcock	37

BEAKERS

Page No.

Brush	54
Euro Design	53
Low form	50-51
Measuring Jugs, Euro Design	53
Tablet Disintegration	52
Tall form	51-52
Tong SS	54

BOTTLES

Page No.

Aspirator	60-61
Aspirator PP	60-61
BOD	67
Brush	68
Culture (Roux)	68
Dropping	62
Gas Washing	63
Head, Sintered Wash	64
HPLC Mobile Phase	56
PP Safety Caps(HPLC)	56
Mac-Cartney	62
Narrow Mouth PP	55
Pouring Ring, Blue Colour	57
Reagent Amber Screw Cap	55
Reagent Clear Narrow Mouth Graduated	55
Reagent, Square Type, Wide Mouth, Graduated	56
Safety Jar	69
Screw Cap PE	56
Screw Cap PTFE (Teflon)	57
Pycnometers	66
Teflon Ring, White Colour	57
Tooled Neck	59-60
Beaker PP	53
Wash Bottles	65
Wash PP	20
Weighing	64
Reagent Clear Narrow Mouth (Clear/Amber)	58

INDEX

BURETTE

Page No.

Atomizer Bulb	80
Automatic Burette	80
Brush	54,68,80,103,153,
Chloroform Bellow	80
Clamp/Fisher Clamp	74
With glass stopcock, Class-A	71
With PTFE Key Stopcock, ASTM	73
With PTFE key stopcock, Class-A	73
With PTFE needle valve stopcock	73
With PTFE needle valve stopcock	81

COLUMNS

Page No.

Chromatographic columns with Frit	82-83
Chromatography with ground cone	85
Chromatography Plain	81
Chromatography PTFE Key Stopcock	84
Chromatography PTFE Needle Valve Stopcock	81
Vigreux	85

CONDENSERS

Page No.

Air	86
Allihin	89
Coil	88-89
Dimroth	90-91
Double Surface	113
Friedrichs	92
Leibig	87
Reflux	92

CRUCIBLES

Page No.

Filter with sintered disc	96
Holders	96
Porcelain (Euro Design)	93
Quartz	277-279
Silica	94-95
Tong	54,95,153

CYLINDERS

Page No.

Brush	103
Hexagonal Base, PP	103
Measuring	97,98,99,103,277,279
Mixing	100-101
Nessler	102
Rain Measure	102
Riders/Bumpers for Cylinders	102
Tapped Density Cylinder	101

DESICCATORS

Page No.

With Lid, Plain	104
With Lid, Vacuum	104

DISHES

Page No.

Crystallizing	105
Evaporating	106, 137
Pestle & Mortar	108
Petri	107-108
Petri, Disposable	107
Petri, SG Line	107
Rack	247-248

DISTILLATION

Page No.

Alcohol Distillation Unit	111
Clevenger Apparatus	111-112
Dean and Stark	112
Friedrichs Condenser	110
RM Value Apparatus	111
With Graham Condenser	109

EXTRACTION APPARATUS

Page No.

Allihin for Soxhlet Apparatus	119
Dimroth for Soxhlet Apparatus	120
Extraction Apparatus	118
Extractor	118

INDEX

FILTRATION ASSEMBLY

Page No.

Filter Bottle	124, 126
Filter Holder Assembly For 25mm	125
Filter Holder Assembly For 47 mm	124
Filter Holder Assembly For 90 mm	126
Flasks	129-154
Vacuum Filtration Manifold	128
Vacuum Pump	127

FLASKS

Page No.

Vacuum Filtration Manifold	128
Vacuum Pump	127
Arsenic Determination Apparatus	152
Brush	153
Buchner	131, 177, 178
Conical PP	137
Conical With Joint	132
Conical, Erlenmeyer, Graduated	129, 130
Culture baffled	135
Culture Haffkine	135
Distillation	109-117
Erlenmeyer, with Screw Cap	134
Evaporating	106, 137
Filter	96
Flat Bottom	138, 291, 296
Flat Bottom with Joint	139
Grip Hand	154
Iodine	132
Kjeldahl	151
Pear shape	186-188, 192, 149
Pear shape 2 Neck	150
Reaction (Vessels)	148
Reaction With Glass Stopcock	150
Round Bottom	140-147, 289, 303
Round Bottom 2 Neck	142-143
Round Bottom 3 Neck	144-145
Round Bottom 4 Neck	146-147
Stainless Steel Clips	148
Stand	154
Tilt Measure	152

Tong

54, 95, 153

FLASKS VOLUMETRIC

Page No.

Bumper Guard	175
Flask, Volumetric, Class B, ISO	173
Flower-Power, Polyethylene Stoppers	176
Solid Penny Head Stoppers, (Amber & Clear)	175
Sugar Estimation	174
Volumetric (PP)	174
Volumetric, Amber/White mark, Class A	172
Volumetric, Class A, DIN/ISO, QR Coded	158
Volumetric, Class A, NABL (Clear & Amber)	166-167
Volumetric, Class A, QR Coded ASTM	161-162
Volumetric, Class A, QR Coded, USP	159-160
Volumetric, Class A, DIN/ISO	163-165
Volumetric, Class A, Serialized, ASTM	170-171
Volumetric, Class A, USP	168-169

FUNNELS

Page No.

Analytical PP	179
Buchner, PP	182
Buchner, With Sintered Disc	181
Dropping Cylindrical	187-188, 194
Dropping Pear Shape	196
Dropping, Gilson	189
Gas Generator	199
Holder	198
Industrial PP	180
Long Stem	177
Long Stem PP	179
Powder	178
Powder PP	180
Pressure Equalizing, Cylindrical	195
Pressure Equalizing, Pear Shape	196
Separating Cylindrical	192-193
Separating Squibb	183-185
Separating, Pear shape	186-187, 190-192
Seperatory PP	197

INDEX

INSTRUMENTS, HEATING

Page No.

Magnetic Stirrer with Hotplate	201-210
Dry Block Heater	211
3 Position Magnetic Stirrer	212
Digital Flat Stirrer	213
Magnetic Stirrer- Digital	214
5 Position Magnetic Stirrer	215
15 Position Magnetic Stirrer	216
Heating Mantles	217-221
Heating Mantle Combined Unit	222-223
Overhead Stirrer	224-227
Shakers	228-233
Mini Centrifuge	234
Roller Mixer	235
Fat Determination Apparatus	236-237
Thermostatic Water Bath	238
Water Bath Shaker	239
Thermostatic Oil Bath	240
Digital Instant N-P-K Tester	241
Digital Soil EC Tester	242
Digital pH Tester	243
Nitrogen Analyser	244
Ultrasonic Cleaner Prime Series	245
Automatic Solvent Extraction System	246
Water Distillation with Chiller	247
All glass water Distillation	248
Automatic Solvent Extraction System	249
COD Digestion	250
Hot Air Oven	251,254
BOD Incubator	252
Laminar Air Flow	253
Autoclave Portable, Vertical	255

JOINTS

Page No.

Cone	256
Keck Clips	257
Socket	256-257
Spherical Ball	258
Spherical Cup	258

LAB ESSENTIALS

Page No.

Box Slide	260
Cover Glass	260
Gloves	259
Jars Specimen	264
Microscopic Slides	259
Natural Rubber Cones	265
Parafilm M Dispenser	265
Silicon Rubber Cones	266
Soft Loop Sterile	261
Stirrer Glass	263
Stirrer PP	261
Storage Boxes	263
Watch Glass Neutral Glass	264
Weighing Scoops	262
Wire Gauge	262
Basket	323

LIQUID HANDLING

Page No.

Bottle Top Dispenser, Dual Inlet Technology	275
Bottle Top Dispenser, With Recirculation Valve	274
Bottle Top Dispenser, Without Recirculation Valve	274
Micro Volume Pipette Multi Channel	268
Micropipette, Single Channel	267
Pipette Stand, Acrylic	271
Rack for Tips	272
Reloading Tray	273
Tips Empty Rack	273
Universal Graduated Tips	269-271

METALWARE

Page No.

Boss Head	281-282
Burner Bunsen	283
Burner Meaker	284
Clamp(Retort, Universal)	278-281
Clamp Condenser	279-280
Dissecting Set	290
Forceps	288-290

INDEX

Jack Laboratory	285
Rings Retort	277
Rod Retort	277
Spatula, Micro, Double	285-287
Spatula, Knife	288
Stand Retort	276
Stand Tripod	283

PIPETTES

Page No.

Gerber Milk	297
Graduated	293-296
Graduated Bacteriological	297
Pasteur Pipette (Disposable)	302
Pipette Box	298
Pipette Bulb	299
Pipette Controller	301
Pipette Filler	299
Pipette Pump	298
Pipette Stand	300
Volumetric 1 mark	291-293

QUARTZWARE

Page No.

Beakers, Low Form, With Spout	303
Bottle, Reagent	303
Cylinder, Measuring, Class B	303
Dishes / Basins, Round	304
Erlenmeyer Flasks	304
Flask, Volumetric	304
Funnel, with Stem	305
Pipette, Measuring, Mohr type	305
Pipette, Transfer, Volumetric, Class B	305

RUBBERWARE

Page No.

Corks Rubber	306-307
Mat	313
Sheet	313
Teats	312
Tube Safety Burner	306
Tubing	309-312

TUBES

Page No.

Brush	322
Micro Centrifuge PP	330
Centrifuge Tube	326-328
Centrifuge Tube Box	329
OAK Ridge Centrifuge Tubes	329
Closure Cap	317
COD Digestion	321
Culture Flat Bottom	316
Culture Round Bottom	315
Culture Tube Disposable (Boro 5.1 & 7.0)	318-319
Float Rack	327
Micro Centrifuge Tube	330
Rack for Micro Centrifuge Tube	330
Reaction	322
Stand	323-325
Test Tube	320-321
Test Tube Reusable	314

UTILITY SETS

Page No.

27 GU	331
29 GU	331
34 GU	332

VIALS

Page No.

Cryo Box (Cardboard)	337
Cryo Rack	336
MCT Twin Rack	337
Rack for Scintillation	336
Screw Neck Vial & Cap Kits	334
Storage	333
Sv5 Vials	333
Test Tube with Screw Cap	333

WATER DISTILLATION

Page No.

Cabinet Still	343-344
Double Stage Horizontal	339
Double Stage Vertical	342
Single Stage Horizontal	338
Single Stage Vertical	340-341
Water Softener	345

TERMS & CONDITIONS

The following terms and conditions of sale and payment shall apply to all goods supplied by us unless specifically accepted by us in writing. Acceptance of goods supplied constitutes acceptance of these terms:

- Prices are in Indian Rupees. The Authorised Dealers are at liberty to charge lower than that stipulated here. These prices are exclusive of any delivery charges, octroi and other non-statutory levies.
- Prices are exclusive of GST which shall be extra as applicable on the date of Invoice.
- Prices are subject to change without notice. Prices applicable on the date of supply shall be valid.
- Invoices are to be paid immediately or as per the agreed credit terms.
- The price contains the standard quantities per pack for each item. It is desirable that orders are placed in multiples thereof.
- Every effort shall be made to maintain quoted delivery dates. However, due to the risks and nature of working with the glass, these dates are not in any way binding. Our contractual obligation to our customers is subject to correct and prompt deliveries from our suppliers.
- No goods should be returned to us without our prior approval.
- All information contained in this pricelist-cum-catalogue cannot be reproduced without our written consent.
- All legal relationship formed as a result of sales would be in accordance with the Indian Laws and Ambala Cantt shall be the place of jurisdiction for all parties and for all matters. If GLASSCO appears as a plaintiff, it will also be entitled to start legal proceedings at any such city / town where the customers are located

Additional Terms applicable to supply of Instruments only

- **Warranty :** The instruments supplied shall carry warrantee of one year from the date of invoice to the original purchaser against faulty workmanship and defect. Any part going defective will be replaced/ repaired free of cost. Few items like fuses, lamps, bulbs, heaters, etc. are not covered under warranty. Again damage resulting due to accident/misuse is not covered under warranty. Warranty conditions for different instruments may vary.
- **Freight Cost** will be additional to the quoted price.
- **IQ/PQ/OQ certifications** will be charge extra as per instrument category.
- **Installation :** All the instruments covered in this price list can be installed by the user with the help of instruction manual supplied with the equipment. In case Company's technical representative has to undertake the installation, charges will be extra and shall be quoted on case-to-case basis.
- **Delivery :** Will be effected Ex-Ambala Cantt within 4-6 weeks from the date of receipt of the order complete in all respect. Exact delivery period will be intimated in the order acknowledgement. For specially manufactured items, delivery period will be more than 6 weeks.
- During warranty period replacement of mechanical & electrical components if any will be done free of cost. However, component replacement if any, cause of wear and tear like rubber components, flexible hose, breakable glass components and consumables like membrane, crucible etc will not be covered under warranty.
- The warranty does not include damage created in the instrument/electronic/ heaters due to very high voltage spikes, lighting, surge voltage, etc which is out of scope of our control. Warranty does not cover damages created due to natural calamities like fire, flood etc.



[Go to Website](#)

GLASSCO LABORATORY EQUIPMENTS PVT. LTD.

Head Off.: Manglai, P. O. Khuda Kalan,
Ambala Cantt. 133 004 (INDIA)

☎ +91 171-2891633 | 70820-15113, 70820-15114

🌐 www.glasscolabs.in ✉ info@glasscolabs.com

Branch Off.: C-90 1st Floor, DDA Shed,
Okhla Phase 1, New Delhi-110020 (INDIA)

☎ +91-11-49054807

✉ delhi@glasscolabs.com